


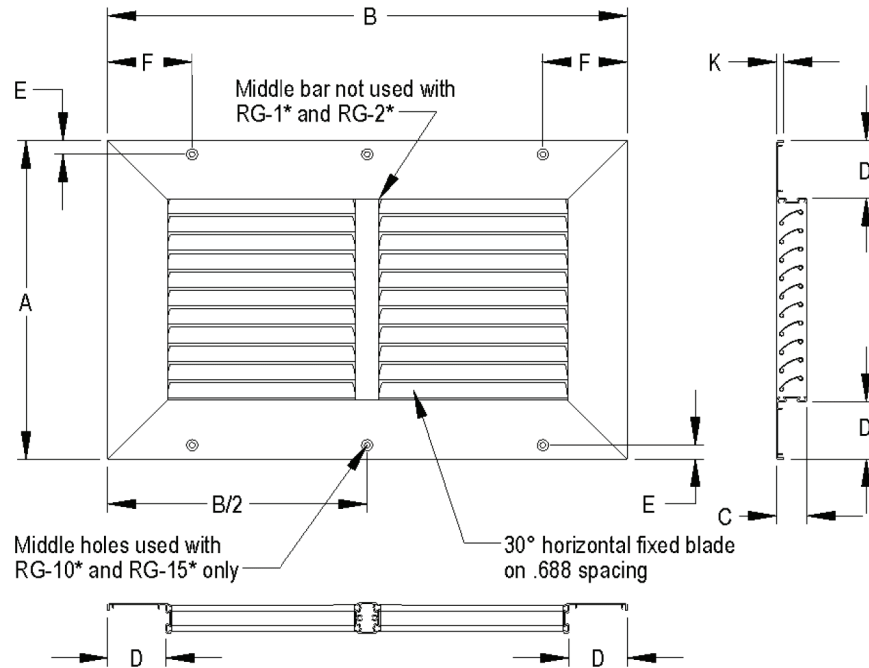

Part #	Finish	Nominal	Units	A	B	C	D	E	F	K	Weight
RG-1W	Silver	10" x 17"	W12	13.69	20.69	.81	2.00	.50	N/A	.19	2.7 lbs.
RG-2W	Silver	12" x 20"	W18-24	15.69	23.69	.81	2.00	.50	5.84	.19	4.2 lbs.
RG-3W	Silver	14" x 28"	W30-36	17.69	31.69	.81	2.00	.50	5.84	.19	5.8 lbs.
RG-5W	Silver	16" x 30"	W42-60	19.69	33.69	.81	2.00	.50	5.84	.19	6.0 lbs.
RG-10W	Silver	22" x 43"	W90-150	25.56	46.56	.81	2.00	.50	4.84	.25	10 lbs.
RG-10W-W	White	22" x 43"	W90-150	25.56	46.56	.81	2.00	.50	4.84	.25	10 lbs.
RG-15W	Silver	22" x 55"	W180	25.56	58.56	.81	2.00	.50	5.84	.25	12.5lbs
RG-1W-A	Anodized	10" x 17"	W12	14.25	21.25	.88	2.25	.50	4.84	.38	2.7 lbs.
RG-2W-A	Anodized	12" x 20"	W18-24	16.25	24.25	.88	2.25	.50	4.84	.38	4.2 lbs.
RG-3W-A	Anodized	14" x 28"	W30-36	18.25	32.25	.88	2.25	.50	4.84	.38	5.8 lbs.
RG-5W-A	Anodized	16" x 30"	W42-60	20.25	34.25	.88	2.25	.50	4.84	.38	6.0 lbs.
RG-10W-A	Anodized	22" x 43"	W90-150	26.00	47.00	.88	2.25	.50	4.84	.38	10 lbs.
RG-15W-A	Anodized	22" x 55"	W180	26.00	59.00	.88	2.25	.50	4.84	.38	12.5lbs
RG-1	Silver	10" x 17"	W12	11.69	18.69	.81	1.00	.50	N/A	.19	3 lbs.
RG-2	Silver	12" x 20"	W18-24	13.69	21.69	.81	1.00	.50	4.84	.19	4 lbs.
RG-3	Silver	14" x 28"	W30-36	15.69	29.69	.81	1.00	.50	4.84	.19	5 lbs.
RG-5	Silver	16" x 30"	W42-60	17.69	31.69	.81	1.00	.50	4.84	.19	6.5 lbs.
RG-1-A	Anodized	10" x 17"	W12	11.50	18.50	.88	1.06	.39	2.75	.38	2.7 lbs.
RG-2-A	Anodized	12" x 20"	W18-24	13.50	21.50	.88	1.06	.39	2.75	.38	4.2 lbs.
RG-3-A	Anodized	14" x 28"	W30-36	15.50	29.50	.88	1.06	.39	2.75	.38	5 lbs.
RG-5-A	Anodized	16" x 30"	W42-60	17.50	31.50	.88	1.06	.39	2.75	.38	6.5 lbs.

Silver and White are Painted Aluminum finishes. Anodized is an Extruded Aluminum finish. Vinyl gasket location may vary per grille design.

#6 pan head mounting screws supplied with grilles. Air deflectors are 4-way adjustable, and blade spacing is typically .66" to .75".


All dimensions $\pm .125"$ due to manufacturing tolerances.

F2096

"RG" Return Grille Submittal

2-26-2024

"RGR" Series Return Air Grilles

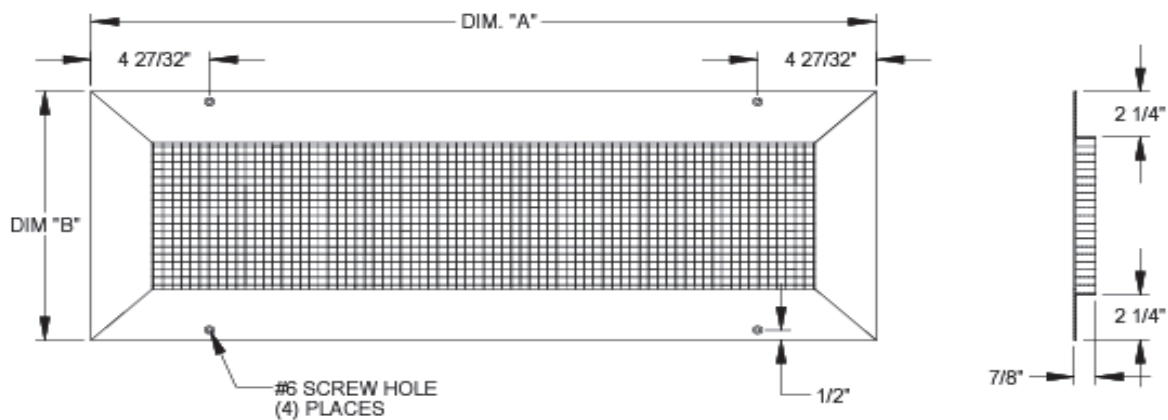


Grille Size Chart			
Grille part number	Use with unit(s)	Dim. "A"	Dim. "B"
RGR-3W (8"x 28")	HR35, WR35	32.125	12.125
RGR-5W (10"x 30")	HR36, WR36, HR58, WR58	34.250	14.250

Standard industry tolerances apply. Specs. are subject to change without notice.

Construction: Aluminum frame - white finish.

MIS-3914

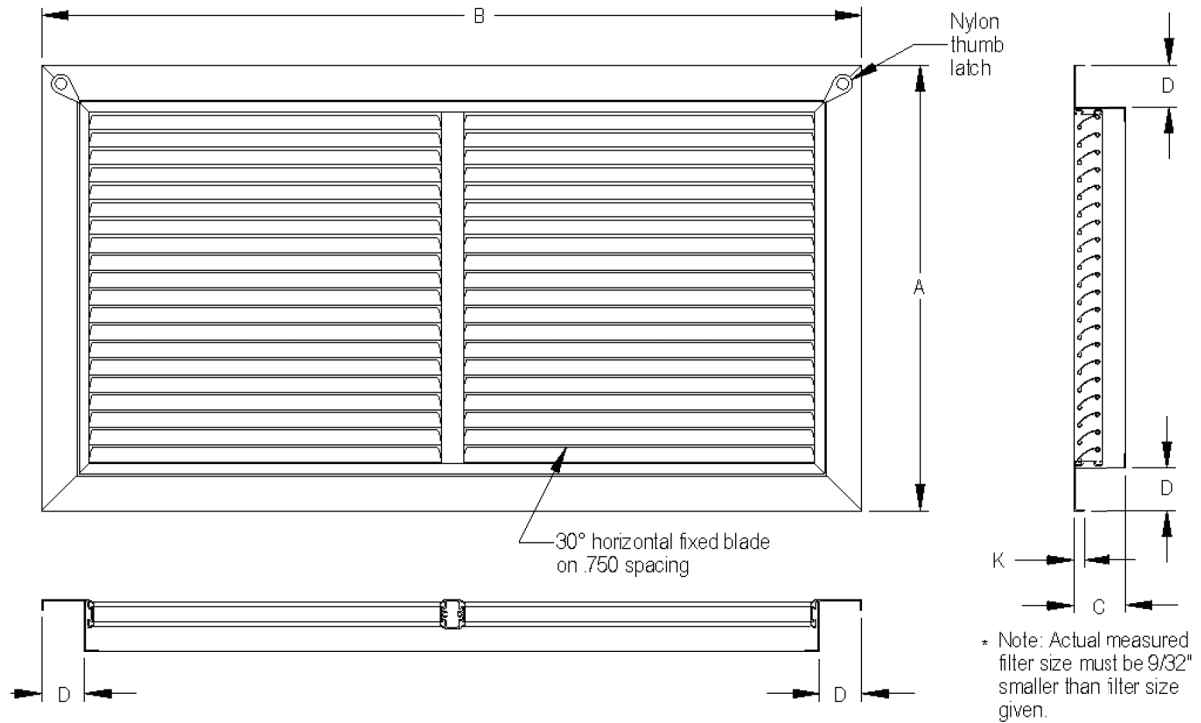

Part #	Finish	Nominal	Units	A	B	C	D	K	Filter	Weight
RFG-1W	Silver	10" x 17"	W12	13.00	20.00	2.0	1.59	.50	1 Required 10x17	2.7 lbs.
RFG-2W	Silver	12" x 20"	W18-24	15.00	23.00	2.0	1.59	.50	1 Required 12x20	4.2 lbs.
RFG-3W	Silver	14" x 28"	W30-36	17.00	31.00	2.0	1.59	.50	1 Required 14x28	5.8 lbs.
RFG-5W	Silver	16" x 30"	W42-60	19.00	33.00	2.0	1.59	.50	1 Required 16x30	6.0 lbs.
RFG-10W	Silver	22" x 43"	W90-150	25.00	46.00	2.0	1.59	.50	2 Required 21x21	10 lbs.
RFG-1W-A	Anodized	10" x 17"	W12	14.25	21.25	1.9	2.25	.25	1 Included 10x17	2.7 lbs.
RFG-2W-A	Anodized	12" x 20"	W18-24	16.25	24.25	1.9	2.25	.25	1 Included 12x20	4.2 lbs.
RFG-3W-A	Anodized	14" x 28"	W30-36	18.25	32.25	1.9	2.25	.25	1 Included 14x28	5.8 lbs.
RFG-5W-A	Anodized	16" x 30"	W42-60	20.25	34.25	1.9	2.25	.25	1 Included 16x30	6.0 lbs.
RFG-10W-A	Anodized	22" x 43"	W90-150	25.50	46.50	1.9	2.25	.25	2 Required 21x21	10 lbs.
RFG-1	Silver	10" x 17"	W12	12.25	19.25	2.0	1.22	.50	1 Required 10x17	3 lbs.
RFG-2	Silver	12" x 20"	W18-24	14.25	22.25	2.0	1.22	.50	1 Required 12x20	4 lbs.
RFG-3	Silver	14" x 28"	W30-36	16.25	30.25	2.0	1.22	.50	1 Required 14x28	5 lbs.
RFG-5	Silver	16" x 30"	W42-60	18.25	32.25	2.0	1.22	.50	1 Required 16x30	6.5 lbs.
RFG-1-A	Anodized	10" x 17"	W12	12.15	19.15	1.9	1.20	.21	1 Included 10x17	2.7 lbs.
RFG-2-A	Anodized	12" x 20"	W18-24	14.15	22.15	1.9	1.20	.21	1 Included 12x20	4.2 lbs.
RFG-3-A	Anodized	14" x 28"	W30-36	16.15	30.15	1.9	1.20	.21	1 Included 14x28	5 lbs.
RFG-5-A	Anodized	16" x 30"	W42-60	18.15	32.15	1.9	1.20	.21	1 Included 16x30	6.5 lbs.

Silver and White are Painted Aluminum finishes. Anodized is an Extruded Aluminum finish. Vinyl gasket location may vary per grille design.

#6 pan head mounting screws supplied with grilles. Air deflectors are angled downward, and blade spacing is typically .66" to .75".

All dimensions $\pm .125"$ due to manufacturing tolerances. Nylon thumb latch design may vary.