

SUBMITTAL DATA

MUL36HP230V1R32AO
36000 BTU/H Multi-Zone Heat Pump System

Job Name

Location

Date

Purchaser

Engineer

Submitted to

For

Unit Designation

Schedule No.



MUL36HP230V1R32AO

GENERAL FEATURES

- AHRI Certificate: [215218916 \(Non-Ducted\)](#)
- [215218921 \(Ducted\)](#)
- [215218926 \(Mixed\)](#)
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Auto Restart on Power Outages
- Multi-point Diagnostics
- Wi-Fi Included (Factory Installed)
- Low Ambient Cooling down to -22°F (Range -22°F to 118°F)
- Low Ambient Heating down to -22°F (Range -22°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

MULTI-ZONE COMPATIBILITY CHART

WALL MOUNT OPTIONS

	MULTI-ZONE					
	MUL18HP230V1R32AO	MUL24HP230V1R32AO	MUL30HP230V1R32AO	MUL36HP230V1R32AO	MUL42HP230V1R32AO	MUL48HP230V1R32AO
LIVO						
System Model no.						
LIV05HP230V1R32AH	•	•	•	•	•	•
LIV07HP230V1R32AH	•	•	•	•	•	•
LIV09HP230V1R32AH	•	•	•	•	•	•
LIV12HP230V1R32AH	•	•	•	•	•	•
LIV18HP230V1R32AH		•	•	•	•	•
LIV24HP230V1R32AH			•	•	•	•
LIV30HP230V1R32AH						
LIV36HP230V1R32AH						
VIREO						
System Model no.						
VIR09HP230V1R32AH	•	•	•	•	•	•
VIR12HP230V1R32AH	•	•	•	•	•	•
VIR18HP230V1R32AH		•	•	•	•	•
VIR24HP230V1R32AH			•	•	•	•
ENVO						
System Model no.						
ENV09HP230V1R32AH	•	•	•	•	•	•
ENV12HP230V1R32AH	•	•	•	•	•	•
ENV18HP230V1R32AH		•	•	•	•	•
ENV24HP230V1R32AH			•	•	•	•
SAPPHIRE						
System Model no.						
SAP09HP230V1R32AH	•	•	•	•	•	•
SAP12HP230V1R32AH	•	•	•	•	•	•
SAP18HP230V1R32AH		•	•	•	•	•
SAP24HP230V1R32AH			•	•	•	•

ADDITIONAL INDOOR UNIT OPTIONS

	MULTI-ZONE					
	MUL18HP230V1R32AO	MUL24HP230V1R32AO	MUL30HP230V1R32AO	MUL36HP230V1R32AO	MUL42HP230V1R32AO	MUL48HP230V1R32AO
ONE WAY CASSETTE						
System Model no.						
OWC09HP230V1R32AH	•	•	•	•	•	•
OWC12HP230V1R32AH	•	•	•	•	•	•
OWC18HP230V1R32AH		•	•	•	•	•
OWC20HP230V1R32AH			•	•	•	•
CEILING CASSETTE						
System Model no.						
CAS09HP230V1R32AH	•	•	•	•	•	•
CAS12HP230V1R32AH	•	•	•	•	•	•
CAS18HP230V1R32AH		•	•	•	•	•
CAS24HP230V1R32AH			•	•	•	•
SLIM DUCT						
System Model no.						
DUC09HP230V1R32AH	•	•	•	•	•	•
DUC12HP230V1R32AH	•	•	•	•	•	•
DUC18HP230V1R32AH		•	•	•	•	•
DUC24HP230V1R32AH			•	•	•	•
FLOOR/CEILING						
System Model no.						
FLR09HP230V1R32AH	•	•	•	•	•	•
FLR12HP230V1R32AH	•	•	•	•	•	•
FLR18HP230V1R32AH		•	•	•	•	•
FLR24HP230V1R32AH			•	•	•	•
MINI-CONSOLE						
CON09HP230V1R32AH	•	•	•	•	•	•
CON12HP230V1R32AH	•	•	•	•	•	•
CON18HP230V1R32AH		•	•	•	•	•

NOTE: R32 Indoor units are only compatible with R32 Outdoor units. Keep in mind, line set is always sized by the indoor unit valve diameter.

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE		HEAT PUMP	
Outdoor Model		MUL36HP230V1R32AO	
Number of Zones		2 - 4	
SYSTEM PERFORMANCE (Non-Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	8,870 - 40,900
	Rated Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	8,870 - 51,180
	Rated Capacity @47°F	Btu/h	36,000
	Rated Capacity @17°F	Btu/h	36,000
	Rated Capacity @5°F	Btu/h	36,000
SEER2		21	
EER2		12.0	
HSPF2		10.0	
COP @5°F		2.10	
SYSTEM PERFORMANCE (Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	8,870 - 40,900
	Rated Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	8,870 - 51,180
	Rated Capacity @47°F	Btu/h	36,000
	Rated Capacity @17°F	Btu/h	36,000
	Rated Capacity @5°F	Btu/h	33,000
SEER2		18.0	
EER2		11.7	
HSPF2		8.1	
COP @5°F		1.90	
SYSTEM PERFORMANCE (Mixed Ducted and Non-Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	8,870 - 40,900
	Rated Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	8,870 - 51,180
	Rated Capacity @47°F	Btu/h	36,000
	Rated Capacity @17°F	Btu/h	36,000
	Rated Capacity @5°F	Btu/h	34,000
SEER2		19.0	
EER2		11.8	
HSPF2		9.0	
COP @5°F		1.84	
OUTDOOR UNIT		MUL36HP230V1R32AO	
Cooling Temperature Range		°F	-22 - 118
Heating Temperature Range		°F	-22 - 75
Refrigerant Type		R32	
Cmpressor Type		GREE G-20 / Double Cylinder / 1 - STAGE INVERTER	
Sound Pressure Level		dB(A)	59
External Dimensions (W x H x D)		in	40-10/64 x 32-33/64 x 16-52/64
Package Dimension (W x H x D)		in	43-1/32 x 34-27/32 x 19-9/16
Net Weight		lbs	173.1
Gross Weight		lbs	188.5
REFRIGERANT PIPING			
Refrigerant Charge - R32		oz	95.256
Cmpressor Type		GREE G-20 / Double Cylinder / 1 - STAGE INVERTER	
Additional Charge		oz/ft	0.2

Port Size (Liquid - Gas)	Port A (in)	1/4 - 3/8	
	Port B (in)	1/4 - 3/8	
	Port C (in)	1/4 - 3/8	
	Port D (in)	1/4 - 3/8	
	Port E (in)		
Pre-Charge Length		ft	131
Pipe Length (Min - Max)		ft	10 - 263
Pipe Length to furthest Indoor Unit		ft	82
Max. Pipe Elevation		ft	82
ELECTRICAL			
Power Supply		208-230V / 1Ph / 60Hz	
Voltage Range (Min - Max)		VAC	187 - 253
Rated Current - Cooling		A	21.7
Rated Current - Heating		A	22.6
MOCP		A	35
MCA		A	30
Main Power Wire Size		AWG	Per Local Code
Interconnecting Wire Size		AWG	14 / 4
FEATURES & FUNCTIONS SUMMARY			
Inverter Type		G20	
Ultra Low Frequency Torque Control		Yes	
Compressor Type - Inverter		Yes	
Basepan With Electric Heater		High Efficiency Rotary	
Indoor & Outdoor Fin Coating (Blue Fin)		Yes	
Intelligent Defrosting		Yes	
Intelligent Preheating		Yes	
Low Voltage Startup		Yes	
Memory/Power Failure Recovery		Yes	
Self Diagnosis		Yes	

ALLOWABLE COMBINATIONS CAPACITIES

MODEL NUMBER	POSSIBLE COMBINATIONS*	COOLING CAPACITY (Btu/h)					HEATING CAPACITY (Btu/h)				
		ZONE1	ZONE2	ZONE3	ZONE4	ZONE5	ZONE1	ZONE2	ZONE3	ZONE4	ZONE5
MUL36HP230V1R32AO	7K+7K+7K	7,000	7,000	7,000			8,000	8,000	8,000		
MUL36HP230V1R32AO	5K+7K+7K	5,000	7,000	7,000			6,000	8,000	8,000		
MUL36HP230V1R32AO	5K+5K+5K+5K	5,000	5,000	5,000	5,000		6,000	6,000	6,000	6,000	
MUL36HP230V1R32AO	7K+7K+7K+7K	7,000	7,000	7,000	7,000		8,000	8,000	8,000	8,000	
MUL36HP230V1R32AO	5K+5K+5K+7K	5,000	5,000	5,000	7,000		6,000	6,000	6,000	8,000	
MUL36HP230V1R32AO	5K+5K+7K+7K	5,000	5,000	7,000	7,000		6,000	6,000	8,000	8,000	
MUL36HP230V1R32AO	5K+7K+7K+7K	5,000	7,000	7,000	7,000		6,000	8,000	8,000	8,000	
MUL36HP230V1R32AO	9K+9K	9,000	9,000				9,000	9,000			
MUL36HP230V1R32AO	9K+12K	9,000	12,000				9,000	12,000			
MUL36HP230V1R32AO	9K+18K	9,000	18,000				9,000	18,000			
MUL36HP230V1R32AO	9K+24K	9,000	24,000				9,000	24,000			
MUL36HP230V1R32AO	12K+12K	12,000	12,000				12,000	12,000			
MUL36HP230V1R32AO	12K+18K	12,000	18,000				12,000	18,000			
MUL36HP230V1R32AO	12K+24K	12,000	24,000				12,000	24,000			
MUL36HP230V1R32AO	18K+18K	18,000	18,000				18,000	18,000			
MUL36HP230V1R32AO	18K+24K	15,429	20,571				15,429	20,571			
MUL36HP230V1R32AO	21K+24K	16,800	19,200				16,800	19,200			
MUL36HP230V1R32AO	24K+24K	18,000	18,000				18,000	18,000			
MUL36HP230V1R32AO	9K+9K+9K	9,000	9,000	9,000			9,000	9,000	9,000		
MUL36HP230V1R32AO	9K+9K+12K	9,000	9,000	12,000			9,000	9,000	12,000		
MUL36HP230V1R32AO	9K+9K+18K	9,000	9,000	18,000			9,000	9,000	18,000		
MUL36HP230V1R32AO	9K+9K+24K	7,714	7,714	20,571			7,714	7,714	20,571		
MUL36HP230V1R32AO	9K+12K+12K	9,000	12,000	12,000			9,000	12,000	12,000		
MUL36HP230V1R32AO	9K+12K+18K	8,308	11,077	16,615			8,308	11,077	16,615		
MUL36HP230V1R32AO	9K+12K+24K	7,200	9,600	19,200			7,200	9,600	19,200		
MUL36HP230V1R32AO	9K+18K+18K	7,200	14,400	14,400			7,200	14,400	14,400		
MUL36HP230V1R32AO	9K+18K+24K	6,353	12,706	16,941			6,353	12,706	16,941		
MUL36HP230V1R32AO	9K+21K+24K	6,000	14,000	16,000			6,000	14,000	16,000		
MUL36HP230V1R32AO	12K+12K+12K	12,000	12,000	12,000			12,000	12,000	12,000		
MUL36HP230V1R32AO	12K+12K+18K	10,286	10,286	15,429			10,286	10,286	15,429		
MUL36HP230V1R32AO	12K+12K+24K	9,000	9,000	18,000			9,000	9,000	18,000		
MUL36HP230V1R32AO	12K+18K+18K	9,000	13,500	13,500			9,000	13,500	13,500		
MUL36HP230V1R32AO	12K+18K+24K	8,000	12,000	16,000			8,000	12,000	16,000		
MUL36HP230V1R32AO	18K+18K+18K	12,000	12,000	12,000			12,000	12,000	12,000		
MUL36HP230V1R32AO	9K+9K+9K+9K	9,000	9,000	9,000	9,000		9,000	9,000	9,000	9,000	
MUL36HP230V1R32AO	9K+9K+9K+12K	8,308	8,308	8,308	11,077		8,308	8,308	8,308	11,077	
MUL36HP230V1R32AO	9K+9K+9K+18K	7,200	7,200	7,200	14,400		7,200	7,200	7,200	14,400	
MUL36HP230V1R32AO	9K+9K+9K+24K	6,353	6,353	6,353	16,941		6,353	6,353	6,353	16,941	
MUL36HP230V1R32AO	9K+9K+12K+12K	7,714	7,714	10,286	10,286		7,714	7,714	10,286	10,286	
MUL36HP230V1R32AO	9K+9K+12K+18K	6,750	6,750	9,000	13,500		6,750	6,750	9,000	13,500	
MUL36HP230V1R32AO	9K+9K+12K+24K	6,000	6,000	8,000	16,000		6,000	6,000	8,000	16,000	
MUL36HP230V1R32AO	9K+9K+18K+18K	6,000	6,000	12,000	12,000		6,000	6,000	12,000	12,000	
MUL36HP230V1R32AO	9K+12K+12K+12K	7,200	9,600	9,600	9,600		7,200	9,600	9,600	9,600	
MUL36HP230V1R32AO	9K+12K+12K+18K	6,353	8,471	8,471	12,706		6,353	8,471	8,471	12,706	
MUL36HP230V1R32AO	12K+12K+12K+12K	9,000	9,000	9,000	9,000		9,000	9,000	9,000	9,000	
MUL36HP230V1R32AO	12K+12K+12K+18K	8,000	8,000	8,000	12,000		8,000	8,000	8,000	12,000	

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance


*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

DIMENSIONS

OUTDOOR UNIT

Unit: inch


MUL36HP230V1R32AO
DIMENSIONS

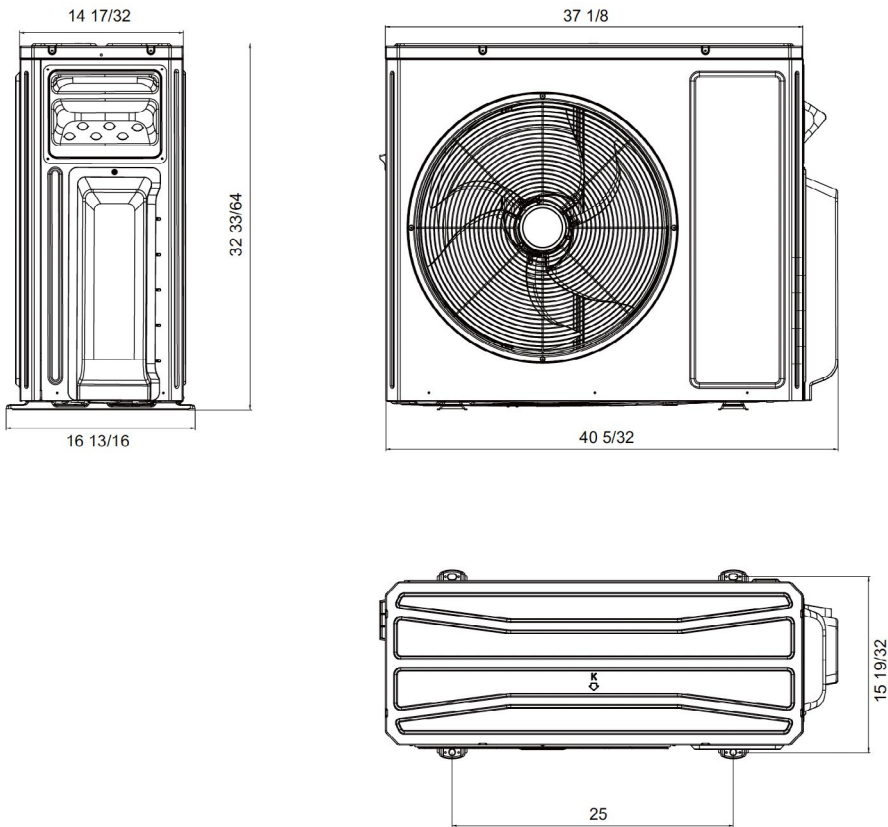

CLEARANCES

OUTDOOR UNIT

Minimum clearance

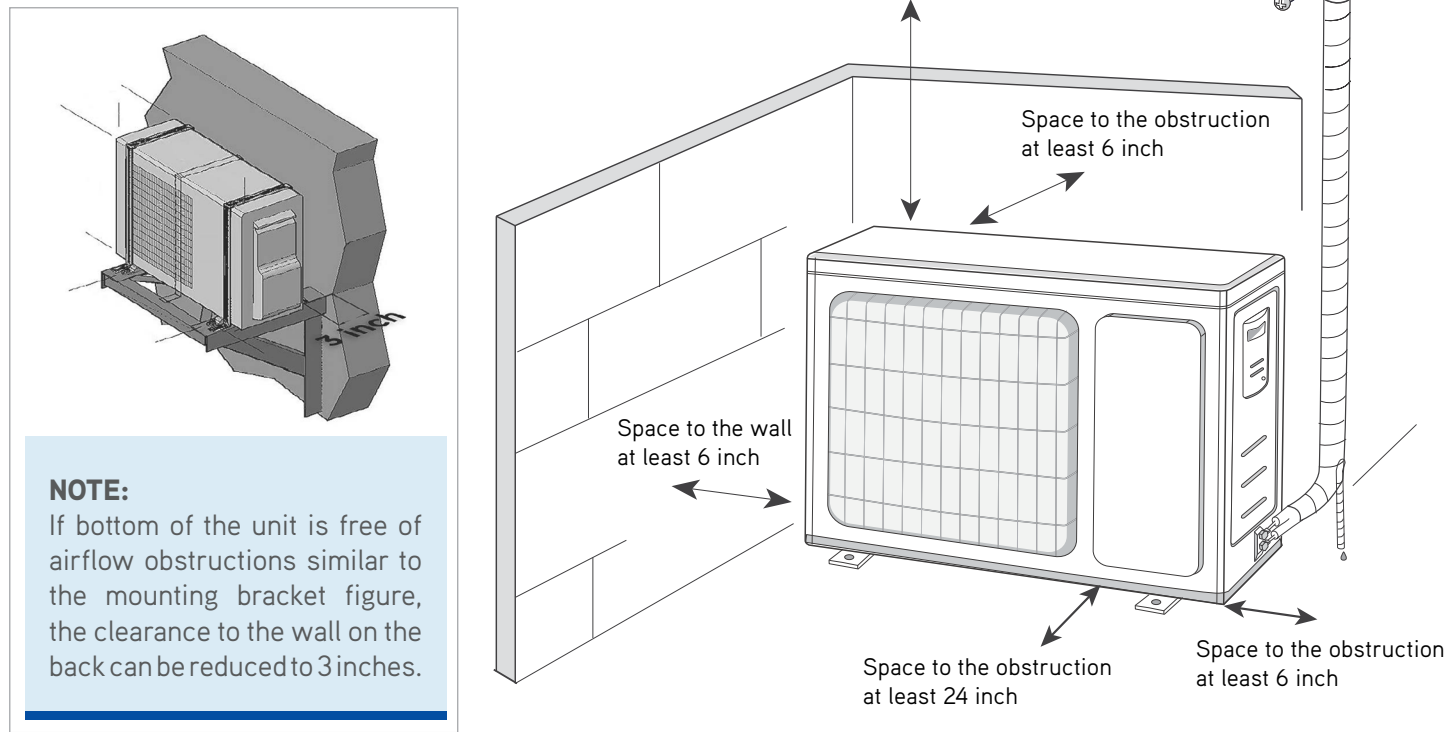

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.