



Air

Package Air Conditioner
RACA13/14/15 Series

The new degree of comfort.™

Rheem *Commercial Classic*® Series Package Air Conditioner



RACA13- 13 SEER Series

Nominal Sizes 3-5 Tons [10.6-17.6 kW]
(3 Phase Only)

RACA14- 14 SEER Series

Nominal Sizes 2-5 Tons [7.0-17.6 kW]

RACA15- 15 SEER Series

Nominal Sizes 2-5 Tons [7.0-17.6 kW]



(14 SEER ONLY)

"Proper sizing and installation of equipment is critical to achieve optimal performance. Ask your Contractor for details or visit www.energystar.gov."



INTEGRATED AIR & WATER

FORM NO. S11-969


TABLE OF CONTENTS

Unit Features & Benefits	3-4
Model Number Identification	5
General Data	
RACA13- Series	6
RACA14- Series	7-9
RACA15- Series	10-12
General Data Notes	13
Gross Systems Performance Data	
RACA13- Series	14-17
RACA14- Series	18-23
RACA15- Series	24-29
Indoor Airflow Performance	30-39
Electrical Data	
RACA13- Series	40
RACA14- Series	41-42
RACA15- Series	43-44
Electric Heater Kits	45-47
Dimensional Data	48-49
Typical Installations	50
Accessories	51-60
Wiring Diagrams	61-66
Limited Warranty	67



Air

Unit Features & Benefits
RACA13/14/15 Series

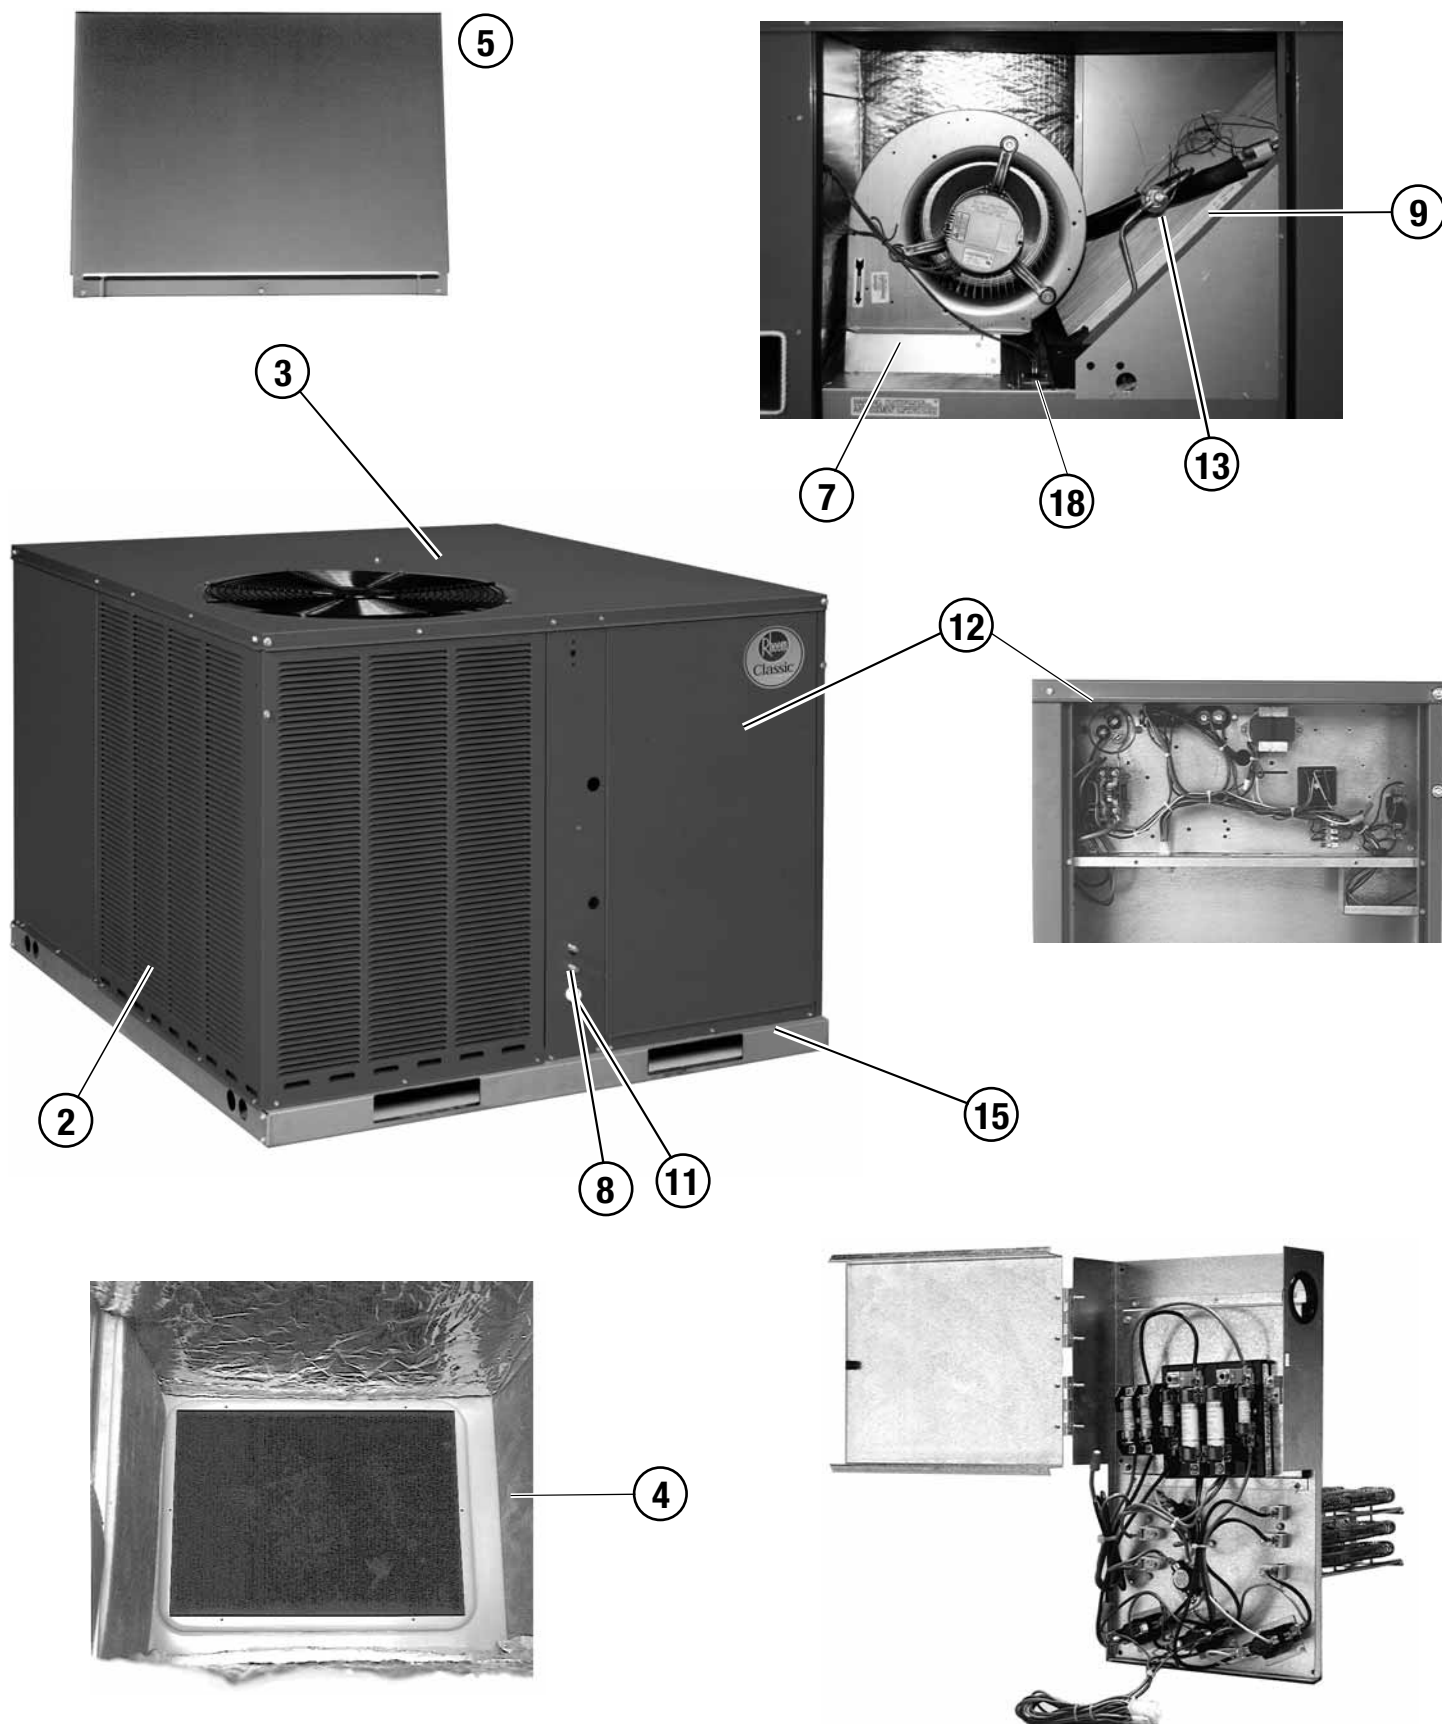

INTEGRATED AIR & WATER



Features Below Correspond to Photos on Page 3

1. All models feature Scroll® compressors for maximum efficiency and quiet operation. The 5-Ton RACA15 model features Scroll UltraTech™ 2-Stage compressors with Comfort Alert™ diagnostics (see below), high/low pressure switches, and hard start kit.
2. Louvered condenser compartment to protect the coil against yard hazards and/or weather extremes.
3. One-piece top with a drip lip to help keep water off of the unit sides.
4. Drawn supply and return air openings feature a one-inch tall flange to prevent water migration into the ductwork.
5. Access panels have “weep holes” and channels to further help manage water run-off.
6. Side and down discharge options available on all models.
7. Easily accessible blower section complete with slide-out blower.
8. Externally mounted refrigerant connections are conveniently located for easy service diagnostics.
9. Micro Channel evaporator and condenser delivers superior performance with less refrigerant charge and less weight than conventional copper tube/aluminum fin coils. In addition the all aluminum construction has superior protection against formicary corrosion and aluminum tube rubbing potential. Its easier to clean and has a more robust surface.
10. Supplemental electric heat strips up to 15 kW are available (field or factory installed) for periods of extreme cold temperatures. Single point wiring simplifies installation.
11. All units feature an internal trap on the condensate line eliminating the need for installing an on-site external trap.
12. Easily accessible control box.
13. Thermal expansion valve standard on all models for superior superheat control, reliability, and energy efficiency at all operating conditions.
14. Solid core liquid line. Filter drier standard on all models (not shown).
15. Rugged baserail included for improved installation and handling.
16. Molded compressor plug.
17. Complete factory charged, wired and run tested.
18. A double sloped evaporator coil drain pan assures all water is removed from the unit to improve indoor air quality.

Comfort Alert™ Diagnostics – Faster Service And Improved Accuracy (5 Ton RACA15 2-Stage Model Only)

The Comfort Alert™ diagnostics module is a breakthrough innovation for troubleshooting air conditioning system failures. The module is installed in the control box near the compressor contactor. By monitoring and analyzing data from the Scroll® compressor and the thermostat demand, the module can accurately detect the cause of electrical and system related failures without any sensors. A flashing LED indicator communicates the ALERT code and guides the service technician more quickly and accurately to the root cause of a problem.

NOTE: Single phase module does not provide safety protection! The Comfort Alert module is a monitoring device and cannot control or shut down the compressor unless used with a compatible thermostat.

NOTE: Three phase module provides compressor protection and will shut down the compressor when compressor damaging conditions are detected.

**R AC A 13 036 A J D 10 1 A A X X X**Factory Installed Options
(See Next Page)Minor Series
A = 1st VariationControl
A = Non CommunicatingHeat Configuration
1 = Single Stage
0 = No HeatHeating Capacity
00 = No Heat
05 = 05 KW
10 = 10 KW
15 = 15 KWDrive Package
D = Direct Drive (PSC)
T = Constant Torque (X13)Voltage
J = 208-230V—1PH—60 Hz
C = 208-230V—3PH—60 Hz
D = 460/60V—3PH—60 HzMajor Series
A = 1st VariationCooling Capacity (BTUH) [kW]
024 = 24,000 [7.03]
030 = 30,000 [8.79]
036 = 36,000 [10.55]
042 = 42,000 [12.31]
048 = 48,000 [14.07]
060 = 60,000 [17.59]Series
13 = 13 SEER
14 = 14 SEER
15 = 15 SEERCabinet Type
A = Residential PackageUnit Type
AC = Package Air ConditionerTradebrand
R = Rheem

[] Designates Metric Conversions



NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RACA13 Series	036ACD***AA	042ACT***AA	048ACT***AA	060ACT***AA
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	35,400 [10.37]	41,000 [12.01]	47,500 [13.92]	59,000 [17.29]
EER/SEER ²	11.8/14	12/14	11.7/14	11.6/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1400/1300 [661/613]	1600/1550 [755/731]	2000/1700 [944/802]
AHRI Net Cooling Capacity Btu [kW]	34,000 [9.96]	40,000 [11.72]	46,000 [13.48]	57,000 [16.7]
Net Sensible Capacity Btu [kW]	24,200 [7.09]	29,000 [8.5]	32,500 [9.52]	39,500 [11.57]
Net Latent Capacity Btu [kW]	9,800 [2.87]	11,000 [3.22]	13,500 [3.96]	17,500 [5.13]
Net System Power kW	2.89	3.27	3.89	4.94
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	79
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.71 [18]	0.71 [18]	0.71 [18]
Face Area sq. ft. [sq. m]	9.8 [0.91]	14.1 [1.31]	16.3 [1.51]	16.3 [1.51]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1 [25.4]	1 [25.4]	1.26 [32]
Face Area sq. ft. [sq. m]	3.6 [0.33]	3.6 [0.33]	4.1 [0.38]	4 [0.37]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 17 [7]	1 / 20 [8]	1 / 20 [8]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	2700 [1274]	3500 [1652]	3300 [1557]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]
Drive Type	Direct	Direct	Direct	Direct
No. Speeds	Multiple	Multiple	Multiple	Multiple
No. Motors	1	1	1	1
Motor HP	1/2	3/4	3/4	1
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x30 [25x610x762]
Refrigerant Charge Oz. [g]	52.7 [1494]	53.6 [1520]	69.3 [1965]	66.1 [1874]
Weights				
Net Weight lbs. [kg]	411 [186]	441 [200]	477 [216]	512 [232]
Ship Weight lbs. [kg]	421 [191]	451 [205]	487 [221]	522 [237]

See Page 13 for Notes.

[] Designates Metric Conversions



NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA14 Series	024AJD***AA	030AJD***AA	036ACD***AA	036AJD***AA
Cooling Performance¹				CONTINUED 
Gross Cooling Capacity Btu [kW]	24,800 [7.27]	30,200 [8.85]	35,400 [10.37]	35,400 [10.37]
EER/SEER ²	11.6/14	12/14	11.8/14	11.8/14
Nominal CFM/AHRI Rated CFM [L/s]	800/900 [378/425]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	24,000 [7.03]	29,000 [8.5]	34,000 [9.96]	34,000 [9.96]
Net Sensible Capacity Btu [kW]	18,400 [5.39]	21,300 [6.24]	24,200 [7.09]	24,200 [7.09]
Net Latent Capacity Btu [kW]	5,600 [1.64]	7,700 [2.26]	9,800 [2.87]	9,800 [2.87]
Net System Power kW	2.07	2.37	2.89	2.89
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.71 [18]	0.71 [18]	0.71 [18]
Face Area sq. ft. [sq. m]	7.1 [0.66]	9.9 [0.92]	9.8 [0.91]	9.8 [0.91]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1 [25.4]	1 [25.4]	1 [25.4]
Face Area sq. ft. [sq. m]	3.6 [0.33]	3.6 [0.33]	3.6 [0.33]	3.6 [0.33]
Rows / FPI [FPcm]	1 / 17 [7]	1 / 23 [9]	1 / 23 [9]	1 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	2500 [1180]	2500 [1180]	2700 [1274]	2700 [1274]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/9x7 [229x178]	1/10x9 [254x229]	1/12x9 [305x229]	1/12x9 [305x229]
Drive Type	Direct	Direct	Direct	Direct
No. Speeds	Multiple	Multiple	Multiple	Multiple
No. Motors	1	1	1	1
Motor HP	1/4	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	42.7 [1211]	46.8 [1327]	52.7 [1494]	52.7 [1494]
Weights				
Net Weight lbs. [kg]	398 [181]	403 [183]	411 [186]	411 [186]
Ship Weight lbs. [kg]	408 [185]	413 [187]	421 [191]	421 [191]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA14 Series	042ACT***AA	042AJT***AA	048ACT***AA	048AJT***AA
Cooling Performance¹				CONTINUED 
Gross Cooling Capacity Btu [kW]	41,000 [12.01]	41,000 [12.01]	47,500 [13.92]	47,500 [13.92]
EER/SEER ²	12/14	12/14	11.7/14	11.7/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1300 [661/613]	1400/1300 [661/613]	1600/1550 [755/731]	1600/1550 [755/731]
AHRI Net Cooling Capacity Btu [kW]	40,000 [11.72]	40,000 [11.72]	46,000 [13.48]	46,000 [13.48]
Net Sensible Capacity Btu [kW]	29,000 [8.5]	29,000 [8.5]	32,500 [9.52]	32,500 [9.52]
Net Latent Capacity Btu [kW]	11,000 [3.22]	11,000 [3.22]	13,500 [3.96]	13,500 [3.96]
Net System Power kW	3.27	3.27	3.89	3.89
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.71 [18]	0.71 [18]	0.71 [18]
Face Area sq. ft. [sq. m]	14.1 [1.31]	14.1 [1.31]	16.3 [1.51]	16.3 [1.51]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1 [25.4]	1 [25.4]	1 [25.4]
Face Area sq. ft. [sq. m]	3.6 [0.33]	3.6 [0.33]	4.1 [0.38]	4.1 [0.38]
Rows / FPI [FPcm]	1 / 17 [7]	1 / 17 [7]	1 / 20 [8]	1 / 20 [8]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3500 [1652]	3500 [1652]	3300 [1557]	3300 [1557]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]
Drive Type	Direct	Direct	Direct	Direct
No. Speeds	Multiple	Multiple	Multiple	Multiple
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	53.6 [1520]	53.6 [1520]	69.3 [1965]	69.3 [1965]
Weights				
Net Weight lbs. [kg]	441 [200]	441 [200]	477 [216]	477 [216]
Ship Weight lbs. [kg]	451 [205]	451 [205]	487 [221]	487 [221]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA14 Series	060ACT***AA	060AJT***AA
Cooling Performance¹		
Gross Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]
EER/SEER ²	11.6/14	11.6/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1700 [944/802]	2000/1700 [944/802]
AHRI Net Cooling Capacity Btu [kW]	57,000 [16.7]	57,000 [16.7]
Net Sensible Capacity Btu [kW]	39,500 [11.57]	39,500 [11.57]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.94	4.94
Compressor		
No./Type	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³		
	79	79
Outdoor Coil—Fin Type		
Tube Type	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	1 [25.4]	1 [25.4]
Rows / FPI [FPcm]	15.3 [1.42]	15.3 [1.42]
	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type		
Tube Type	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	1.26 [32]	1.26 [32]
Rows / FPI [FPcm]	4 [0.37]	4 [0.37]
	1 / 20 [8]	1 / 20 [8]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type		
No. Used/Diameter in. [mm]	Propeller	Propeller
Drive Type/No. Speeds	1/22 [558.8]	1/22 [558.8]
CFM [L/s]	Direct/1	Direct/1
No. Motors/HP	3400 [1604]	3400 [1604]
Motor RPM	1 at 1/3 HP	1 at 1/3 HP
	1075	1075
Indoor Fan—Type		
No. Used/Diameter in. [mm]	FC Centrifugal	FC Centrifugal
Drive Type	1/12x9 [305x229]	1/12x9 [305x229]
No. Speeds	Direct	Direct
No. Motors	Multiple	Multiple
Motor HP	1	1
Motor RPM	1	1
Motor Frame Size	1075	1075
	48	48
Filter—Type		
Furnished	Field Supplied	Field Supplied
(NO.) Size Recommended in. [mm x mm x mm]	No	No
	(1)1x24x30 [25x610x762]	(1)1x24x30 [25x610x762]
Refrigerant Charge Oz. [g]		
	83.1 [2356]	83.1 [2356]
Weights		
Net Weight lbs. [kg]		
	512 [232]	512 [232]
Ship Weight lbs. [kg]	522 [237]	522 [237]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA15 Series	024AJT***AA	030AJT***AA	036ACT***AA	036AJT***AA
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	24,600 [7.21]	29,600 [8.67]	36,000 [10.55]	36,000 [10.55]
EER/SEER ²	12/15	12/15	12/15	12/15
Nominal CFM/AHRI Rated CFM [L/s]	800/900 [378/425]	1000/975 [472/460]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	24,000 [7.03]	29,000 [8.5]	35,000 [10.25]	35,000 [10.25]
Net Sensible Capacity Btu [kW]	18,100 [5.3]	21,500 [6.3]	25,400 [7.44]	25,400 [7.44]
Net Latent Capacity Btu [kW]	5,900 [1.73]	7,500 [2.2]	9,600 [2.81]	9,600 [2.81]
Net System Power kW	2.03	2.21	2.77	2.77
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.71 [18]	0.71 [18]	0.71 [18]
Face Area sq. ft. [sq. m]	7.1 [0.66]	9.9 [0.92]	9.8 [0.91]	9.8 [0.91]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1 [25.4]	1 [25.4]	1 [25.4]
Face Area sq. ft. [sq. m]	3.6 [0.33]	3.6 [0.33]	3.6 [0.33]	3.6 [0.33]
Rows / FPI [FPcm]	1 / 17 [7]	1 / 17 [7]	1 / 17 [7]	1 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	2500 [1180]	2500 [1180]	2700 [1274]	2700 [1274]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/12x7 [305x178]	1/10x9 [254x229]	1/12x9 [305x229]	1/12x9 [305x229]
Drive Type	Direct	Direct	Direct	Direct
No. Speeds	Multiple	Multiple	Multiple	Multiple
No. Motors	1	1	1	1
Motor HP	1/3	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	42.6 [1208]	46.8 [1327]	52.7 [1494]	52.7 [1494]
Weights				
Net Weight lbs. [kg]	403 [183]	403 [183]	411 [186]	411 [186]
Ship Weight lbs. [kg]	413 [187]	413 [187]	421 [191]	421 [191]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA15 Series	042ACT***AA	042AJT***AA	048ACT***AA	048AJT***AA
Cooling Performance¹				CONTINUED 
Gross Cooling Capacity Btu [kW]	41,000 [12.01]	41,000 [12.01]	47,500 [13.92]	47,500 [13.92]
EER/SEER ²	12/15	12/15	12/15	12/15
Nominal CFM/AHRI Rated CFM [L/s]	1400/1300 [661/613]	1400/1300 [661/613]	1600/1550 [755/731]	1600/1550 [755/731]
AHRI Net Cooling Capacity Btu [kW]	40,000 [11.72]	40,000 [11.72]	46,000 [13.48]	46,000 [13.48]
Net Sensible Capacity Btu [kW]	28,600 [8.38]	28,600 [8.38]	33,000 [9.67]	33,000 [9.67]
Net Latent Capacity Btu [kW]	11,400 [3.34]	11,400 [3.34]	13,000 [3.81]	13,000 [3.81]
Net System Power kW	3.28	3.28	3.66	3.66
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.71 [18]	0.71 [18]	0.7 [17.8]
Face Area sq. ft. [sq. m]	14.1 [1.31]	14.1 [1.31]	16.3 [1.51]	16.3 [1.51]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1 [25.4]	1.26 [32]	1.26 [32]
Face Area sq. ft. [sq. m]	3.6 [0.33]	3.6 [0.33]	4.1 [0.38]	4.1 [0.38]
Rows / FPI [FPcm]	1 / 17 [7]	1 / 17 [7]	1 / 20 [8]	1 / 20 [8]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3500 [1652]	3500 [1652]	3300 [1557]	3300 [1557]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]
Drive Type	Direct	Direct	Direct	Direct
No. Speeds	Multiple	Multiple	Multiple	Multiple
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	61.3 [1738]	61.3 [1738]	85.3 [2418]	85.3 [2418]
Weights				
Net Weight lbs. [kg]	445 [202]	445 [202]	492 [223]	492 [223]
Ship Weight lbs. [kg]	455 [206]	455 [206]	502 [228]	502 [228]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RACA15 Series	060ACT***AA	060AJT***AA
Cooling Performance¹		
Gross Cooling Capacity (2nd Stage) Btu [kW]	59,500 [17.43]	59,500 [17.43]
SEER ²	15	15
EER (1st stage / 2nd stage)	20.9/11.4	20.9/11.4
AHRI Rated CFM (1st / 2nd stage) [L/s]	1250/1850 [590/873]	1250/1850 [590/873]
AHRI Net Cooling Capacity (1st / 2nd stage) Btu [kW]	49,500/57,000 [14.5/16.7]	49,500/57,000 [14.5/16.7]
Net Sensible Capacity (1st / 2nd stage) Btu [kW]	33,800/40,700 [9.9/11.92]	33,800/40,700 [9.9/11.92]
Net Latent Capacity (1st / 2nd stage) Btu [kW]	15,700/16,300 [4.6/4.78]	15,700/16,300 [4.6/4.78]
Net System Power (1st / 2nd stage) [kW]	2.14/5.02	2.14/5.02
Compressor		
No./Type	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³		
	78	78
Outdoor Coil—Fin Type		
Tube Type	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	1 [25.4]	1 [25.4]
Rows / FPI [FPcm]	15.3 [1.42]	15.3 [1.42]
	1 / 23 [9]	1 / 23 [9]
Indoor Coil—Fin Type		
Tube Type	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	1.26 [32]	1.26 [32]
Rows / FPI [FPcm]	4 [0.37]	4 [0.37]
	1 / 20 [8]	1 / 20 [8]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type		
No. Used/Diameter in. [mm]	Propeller	Propeller
Drive Type/No. Speeds	1/22 [558.8]	1/22 [558.8]
CFM [L/s]	Direct/1	Direct/1
No. Motors/HP	3300 [1557]	3300 [1557]
Motor RPM	1 at 1/3 HP	1 at 1/3 HP
	1075	1075
Indoor Fan—Type		
No. Used/Diameter in. [mm]	FC Centrifugal	FC Centrifugal
Drive Type	1/12x9 [305x229]	1/12x9 [305x229]
No. Speeds	Direct	Direct
No. Motors	Multiple	Multiple
Motor HP	1	1
Motor RPM	1	1
Motor Frame Size	1075	1075
	48	48
Filter—Type		
Furnished	Field Supplied	Field Supplied
(NO.) Size Recommended in. [mm x mm x mm]	No	No
	(1)1x24x30 [25x610x762]	(1)1x24x30 [25x610x762]
Refrigerant Charge Oz. [g]		
	89.6 [2540]	89.6 [2540]
Weights		
Net Weight lbs. [kg]	515 [234]	515 [234]
Ship Weight lbs. [kg]	525 [238]	525 [238]

See Page 13 for Notes.

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation in CFM range shown in airflow tables. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.



GROSS SYSTEMS PERFORMANCE DATA—RACA13036A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]
DR ①			0.23	0.21	0.18	0.23	0.21	0.18	0.23	0.21	0.18
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	44.3 [13.0] 25.4 [7.4] 2.0	43.5 [12.8] 24.2 [7.1] 2.0	42.3 [12.4] 22.5 [6.6] 2.0	41.4 [12.1] 29.6 [8.7] 2.0	40.6 [11.9] 28.3 [8.3] 2.0	39.5 [11.6] 26.3 [7.7] 2.0	38.3 [11.2] 32.8 [9.6] 2.0	37.6 [11.0] 31.3 [9.2] 2.0	36.6 [10.7] 29.1 [8.5] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	43.0 [12.6] 24.7 [7.2] 2.1	42.2 [12.4] 23.6 [6.9] 2.1	41.1 [12.0] 21.9 [6.4] 2.1	40.0 [11.7] 28.9 [8.5] 2.1	39.3 [11.5] 27.6 [8.1] 2.1	38.2 [11.2] 25.7 [7.5] 2.1	37.0 [10.8] 32.1 [9.4] 2.1	36.3 [10.6] 30.7 [9.0] 2.1	35.3 [10.3] 28.5 [8.4] 2.1
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	41.7 [12.2] 24.0 [7.0] 2.3	40.9 [12.0] 22.9 [6.7] 2.2	39.8 [11.7] 21.3 [6.2] 2.2	38.7 [11.3] 28.2 [8.3] 2.2	38.0 [11.1] 27.0 [7.9] 2.2	37.0 [10.8] 25.1 [7.3] 2.2	35.6 [10.4] 31.4 [9.2] 2.2	35.0 [10.3] 30.0 [8.8] 2.2	34.0 [10.0] 27.9 [8.2] 2.2
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	40.3 [11.8] 23.2 [6.8] 2.4	39.6 [11.6] 22.2 [6.5] 2.4	38.5 [11.3] 20.7 [6.1] 2.3	37.3 [10.9] 27.5 [8.1] 2.4	36.7 [10.7] 26.3 [7.7] 2.4	35.7 [10.5] 24.4 [7.2] 2.3	34.3 [10.0] 30.7 [9.0] 2.4	33.7 [9.9] 29.3 [8.6] 2.4	32.7 [9.6] 27.3 [8.0] 2.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	38.9 [11.4] 22.5 [6.6] 2.5	38.3 [11.2] 21.5 [6.3] 2.5	37.2 [10.9] 20.0 [5.9] 2.5	36.0 [10.5] 26.7 [7.8] 2.5	35.3 [10.4] 25.5 [7.5] 2.5	34.4 [10.1] 23.7 [7.0] 2.5	32.9 [9.6] 29.9 [8.8] 2.5	32.3 [9.5] 28.6 [8.4] 2.5	31.4 [9.2] 26.6 [7.8] 2.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	37.6 [11.0] 21.7 [6.4] 2.7	36.9 [10.8] 20.7 [6.1] 2.7	35.9 [10.5] 19.3 [5.7] 2.6	34.6 [10.1] 25.9 [7.6] 2.7	34.0 [10.0] 24.8 [7.3] 2.7	33.0 [9.7] 23.0 [6.8] 2.6	31.5 [9.2] 29.1 [8.5] 2.7	30.9 [9.1] 27.8 [8.2] 2.6	30.1 [8.8] 25.9 [7.6] 2.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	36.1 [10.6] 20.9 [6.1] 2.9	35.5 [10.4] 20.0 [5.8] 2.8	34.5 [10.1] 18.6 [5.4] 2.8	33.2 [9.7] 25.1 [7.4] 2.8	32.6 [9.5] 24.0 [7.0] 2.8	31.7 [9.3] 22.3 [6.5] 2.8	30.1 [8.8] 28.3 [8.3] 2.8	29.6 [8.7] 27.1 [7.9] 2.8	28.7 [8.4] 25.2 [7.4] 2.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	34.7 [10.2] 20.1 [5.9] 3.0	34.1 [10.0] 19.2 [5.6] 3.0	33.2 [9.7] 17.8 [5.2] 3.0	31.7 [9.3] 24.3 [7.1] 3.0	31.2 [9.1] 23.2 [6.8] 3.0	30.3 [8.9] 21.6 [6.3] 3.0	28.7 [8.4] 27.5 [8.1] 3.0	28.2 [8.3] 26.3 [7.7] 3.0	27.4 [8.0] 24.4 [7.2] 3.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	33.3 [9.8] 19.2 [5.6] 3.2	32.7 [9.6] 18.3 [5.4] 3.2	31.8 [9.3] 17.0 [5.0] 3.2	30.3 [8.9] 23.4 [6.9] 3.2	29.8 [8.7] 22.4 [6.6] 3.2	28.9 [8.5] 20.8 [6.1] 3.2	27.2 [8.0] 26.6 [7.8] 3.2	26.7 [7.8] 25.4 [7.5] 3.2	26.0 [7.6] 23.7 [6.9] 3.1
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	31.8 [9.3] 18.3 [5.4] 3.4	31.2 [9.2] 17.5 [5.1] 3.4	30.4 [8.9] 16.3 [4.8] 3.4	28.8 [8.5] 22.5 [6.6] 3.4	28.3 [8.3] 21.5 [6.3] 3.4	27.5 [8.1] 20.0 [5.9] 3.4	25.8 [7.5] 25.7 [7.5] 3.4	25.3 [7.4] 24.6 [7.2] 3.4	24.6 [7.2] 22.9 [6.7] 3.3
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	30.3 [8.9] 17.4 [5.1] 3.6	29.8 [8.7] 16.6 [4.9] 3.6	29.0 [8.5] 15.4 [4.5] 3.6	27.4 [8.0] 21.6 [6.3] 3.6	26.9 [7.9] 20.7 [6.1] 3.6	26.1 [7.7] 19.2 [5.6] 3.6	24.3 [7.1] 24.3 [7.1] 3.6	23.8 [7.0] 23.7 [6.9] 3.6	23.2 [6.8] 22.0 [6.5] 3.6

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RACA13042A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]
DR ①			0.15	0.14	0.1	0.15	0.14	0.1	0.15	0.14	0.1
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	50.0 [14.7] 29.2 [8.5] 2.4	49.1 [14.4] 27.9 [8.2] 2.4	47.7 [14.0] 25.9 [7.6] 2.3	47.3 [13.9] 34.3 [10.0] 2.4	46.4 [13.6] 32.7 [9.6] 2.3	45.1 [13.2] 30.4 [8.9] 2.3	44.3 [13.0] 38.5 [11.3] 2.3	43.5 [12.8] 36.8 [10.8] 2.3	42.3 [12.4] 34.2 [10.0] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	48.7 [14.3] 28.5 [8.4] 2.5	47.9 [14.0] 27.3 [8.0] 2.5	46.5 [13.6] 25.3 [7.4] 2.5	46.0 [13.5] 33.7 [9.9] 2.5	45.2 [13.2] 32.2 [9.4] 2.5	43.9 [12.9] 29.8 [8.7] 2.4	43.0 [12.6] 37.9 [11.1] 2.5	42.3 [12.4] 36.2 [10.6] 2.5	41.1 [12.0] 33.6 [9.9] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	47.4 [13.9] 27.9 [8.2] 2.7	46.6 [13.6] 26.6 [7.8] 2.6	45.2 [13.3] 24.7 [7.2] 2.6	44.7 [13.1] 33.0 [9.7] 2.6	43.9 [12.9] 31.5 [9.2] 2.6	42.6 [12.5] 29.3 [8.6] 2.6	41.7 [12.2] 37.2 [10.9] 2.6	41.0 [12.0] 35.6 [10.4] 2.6	39.8 [11.7] 33.0 [9.7] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	46.0 [13.5] 27.2 [8.0] 2.8	45.2 [13.2] 26.0 [7.6] 2.8	43.9 [12.9] 24.1 [7.1] 2.8	43.3 [12.7] 32.3 [9.5] 2.8	42.5 [12.5] 30.8 [9.0] 2.8	41.3 [12.1] 28.6 [8.4] 2.7	40.3 [11.8] 36.5 [10.7] 2.8	39.6 [11.6] 34.9 [10.2] 2.8	38.5 [11.3] 32.4 [9.5] 2.7
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	44.6 [13.1] 26.4 [7.7] 3.0	43.8 [12.8] 25.2 [7.4] 3.0	42.6 [12.5] 23.4 [6.9] 2.9	41.8 [12.3] 31.5 [9.2] 3.0	41.1 [12.0] 30.1 [8.8] 3.0	39.9 [11.7] 27.9 [8.2] 2.9	38.9 [11.4] 35.8 [10.5] 3.0	38.2 [11.2] 34.2 [10.0] 2.9	37.1 [10.9] 31.7 [9.3] 2.9
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.6] 25.6 [7.5] 3.2	42.3 [12.4] 24.4 [7.2] 3.1	41.1 [12.1] 22.7 [6.6] 3.1	40.4 [11.8] 30.7 [9.0] 3.2	39.6 [11.6] 29.3 [8.6] 3.1	38.5 [11.3] 27.2 [8.0] 3.1	37.4 [11.0] 34.9 [10.2] 3.1	36.7 [10.8] 33.4 [9.8] 3.1	35.7 [10.5] 31.0 [9.1] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	41.6 [12.2] 24.7 [7.2] 3.4	40.8 [12.0] 23.6 [6.9] 3.3	39.7 [11.6] 21.9 [6.4] 3.3	38.8 [11.4] 29.8 [8.7] 3.3	38.1 [11.2] 28.5 [8.3] 3.3	37.1 [10.9] 26.4 [7.7] 3.3	35.9 [10.5] 34.1 [10.0] 3.3	35.2 [10.3] 32.5 [9.5] 3.3	34.3 [10.0] 30.2 [8.8] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	40.0 [11.7] 23.8 [7.0] 3.6	39.3 [11.5] 22.7 [6.7] 3.5	38.2 [11.2] 21.1 [6.2] 3.5	37.2 [10.9] 28.9 [8.5] 3.5	36.6 [10.7] 27.6 [8.1] 3.5	35.6 [10.4] 25.6 [7.5] 3.5	34.3 [10.0] 33.1 [9.7] 3.5	33.7 [9.9] 31.6 [9.3] 3.5	32.7 [9.6] 29.4 [8.6] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	38.3 [11.2] 22.8 [6.7] 3.8	37.7 [11.0] 21.8 [6.4] 3.7	36.6 [10.7] 20.2 [5.9] 3.7	35.6 [10.4] 27.9 [8.2] 3.8	35.0 [10.2] 26.6 [7.8] 3.7	34.0 [10.0] 24.7 [7.2] 3.7	32.7 [9.6] 32.1 [9.4] 3.7	32.1 [9.4] 30.7 [9.0] 3.7	31.2 [9.1] 28.5 [8.4] 3.7
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	36.7 [10.7] 21.7 [6.4] 4.0	36.0 [10.6] 20.8 [6.1] 4.0	35.0 [10.3] 19.3 [5.6] 3.9	33.9 [9.9] 26.8 [7.9] 4.0	33.3 [9.8] 25.6 [7.5] 3.9	32.4 [9.5] 23.8 [7.0] 3.9	31.0 [9.1] 31.0 [9.1] 4.0	30.4 [8.9] 29.7 [8.7] 3.9	29.6 [8.7] 27.6 [8.1] 3.9
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	34.9 [10.2] 20.6 [6.1] 4.2	34.3 [10.1] 19.7 [5.8] 4.2	33.3 [9.8] 18.3 [5.4] 4.1	32.2 [9.4] 25.8 [7.5] 4.2	31.6 [9.3] 24.6 [7.2] 4.2	30.7 [9.0] 22.8 [6.7] 4.1	29.2 [8.6] 29.2 [8.6] 4.2	28.7 [8.4] 28.7 [8.4] 4.1	27.9 [8.2] 26.6 [7.8] 4.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA13048A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]
DR ①			0.21	0.19	0.17	0.21	0.19	0.17	0.21	0.19	0.17
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	58.8 [17.2]	57.8 [16.9]	56.3 [16.5]	55.4 [16.2]	54.4 [15.9]	53.0 [15.5]	52.6 [15.4]	51.7 [15.1]	50.3 [14.7]
		Sens BTUH [kW]	33.0 [9.7]	31.6 [9.3]	29.4 [8.6]	39.1 [11.5]	37.4 [11.0]	34.8 [10.2]	45.0 [13.2]	43.0 [12.6]	40.1 [11.7]
		Power	2.8	2.8	2.7	2.8	2.7	2.7	2.7	2.7	2.7
	80 [26.7]	Total BTUH [kW]	57.1 [16.7]	56.1 [16.4]	54.6 [16.0]	53.6 [15.7]	52.7 [15.4]	51.3 [15.0]	50.8 [14.9]	49.9 [14.6]	48.6 [14.2]
		Sens BTUH [kW]	32.2 [9.4]	30.8 [9.0]	28.7 [8.4]	38.3 [11.2]	36.6 [10.7]	34.1 [10.0]	44.2 [12.9]	42.3 [12.4]	39.3 [11.5]
		Power	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.8
	85 [29.4]	Total BTUH [kW]	55.3 [16.2]	54.4 [15.9]	52.9 [15.5]	51.9 [15.2]	51.0 [14.9]	49.6 [14.5]	49.1 [14.4]	48.2 [14.1]	46.9 [13.7]
		Sens BTUH [kW]	31.4 [9.2]	30.0 [8.8]	27.9 [8.2]	37.4 [11.0]	35.8 [10.5]	33.3 [9.8]	43.3 [12.7]	41.4 [12.1]	38.6 [11.3]
		Power	3.1	3.1	3.0	3.1	3.1	3.0	3.1	3.0	3.0
	90 [32.2]	Total BTUH [kW]	53.6 [15.7]	52.6 [15.4]	51.2 [15.0]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]	47.3 [13.9]	46.5 [13.6]	45.2 [13.3]
		Sens BTUH [kW]	30.4 [8.9]	29.1 [8.5]	27.1 [7.9]	36.5 [10.7]	34.9 [10.2]	32.5 [9.5]	42.4 [12.4]	40.6 [11.9]	37.8 [11.1]
Power		3.3	3.3	3.2	3.3	3.2	3.2	3.2	3.2	3.2	
95 [35]	Total BTUH [kW]	51.8 [15.2]	50.9 [14.9]	49.5 [14.5]	48.4 [14.2]	47.5 [13.9]	46.3 [13.6]	45.6 [13.4]	44.8 [13.1]	43.6 [12.8]	
	Sens BTUH [kW]	29.5 [8.6]	28.2 [8.3]	26.3 [7.7]	35.6 [10.4]	34.0 [10.0]	31.7 [9.3]	41.5 [12.1]	39.7 [11.6]	36.9 [10.8]	
	Power	3.5	3.5	3.4	3.5	3.4	3.4	3.4	3.4	3.4	
100 [37.8]	Total BTUH [kW]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]	46.6 [13.7]	45.8 [13.4]	44.6 [13.1]	43.8 [12.8]	43.1 [12.6]	41.9 [12.3]	
	Sens BTUH [kW]	28.5 [8.4]	27.3 [8.0]	25.4 [7.4]	34.6 [10.1]	33.1 [9.7]	30.8 [9.0]	40.5 [11.9]	38.7 [11.3]	36.0 [10.6]	
	Power	3.7	3.7	3.6	3.7	3.7	3.6	3.7	3.6	3.6	
105 [40.6]	Total BTUH [kW]	48.4 [14.2]	47.5 [13.9]	46.2 [13.5]	44.9 [13.2]	44.1 [12.9]	42.9 [12.6]	42.1 [12.3]	41.4 [12.1]	40.3 [11.8]	
	Sens BTUH [kW]	27.5 [8.1]	26.3 [7.7]	24.5 [7.2]	33.6 [9.8]	32.1 [9.4]	29.9 [8.8]	39.4 [11.6]	37.7 [11.1]	35.1 [10.3]	
	Power	4.0	3.9	3.9	3.9	3.9	3.8	3.9	3.9	3.8	
110 [43.3]	Total BTUH [kW]	46.6 [13.7]	45.8 [13.4]	44.6 [13.1]	43.2 [12.7]	42.4 [12.4]	41.3 [12.1]	40.4 [11.8]	39.7 [11.6]	38.6 [11.3]	
	Sens BTUH [kW]	26.4 [7.7]	25.3 [7.4]	23.5 [6.9]	32.5 [9.5]	31.1 [9.1]	28.9 [8.5]	38.4 [11.2]	36.7 [10.8]	34.2 [10.0]	
	Power	4.2	4.2	4.1	4.2	4.2	4.1	4.2	4.1	4.1	
115 [46.1]	Total BTUH [kW]	44.9 [13.2]	44.1 [12.9]	42.9 [12.6]	41.5 [12.2]	40.8 [11.9]	39.7 [11.6]	38.7 [11.3]	38.0 [11.1]	37.0 [10.8]	
	Sens BTUH [kW]	25.3 [7.4]	24.2 [7.1]	22.6 [6.6]	31.4 [9.2]	30.0 [8.8]	28.0 [8.2]	37.3 [10.9]	35.7 [10.5]	33.2 [9.7]	
	Power	4.5	4.5	4.4	4.5	4.4	4.4	4.4	4.4	4.4	
120 [48.9]	Total BTUH [kW]	43.2 [12.7]	42.5 [12.4]	41.3 [12.1]	39.8 [11.7]	39.1 [11.4]	38.0 [11.1]	37.0 [10.8]	36.3 [10.6]	35.3 [10.4]	
	Sens BTUH [kW]	24.2 [7.1]	23.1 [6.8]	21.5 [6.3]	30.3 [8.9]	28.9 [8.5]	26.9 [7.9]	36.1 [10.6]	34.6 [10.1]	32.2 [9.4]	
	Power	4.8	4.8	4.7	4.8	4.7	4.7	4.7	4.7	4.6	
125 [51.7]	Total BTUH [kW]	41.5 [12.2]	40.8 [12.0]	39.7 [11.6]	38.1 [11.2]	37.4 [11.0]	36.4 [10.7]	35.3 [10.3]	34.6 [10.2]	33.7 [9.9]	
	Sens BTUH [kW]	23.0 [6.7]	22.0 [6.4]	20.5 [6.0]	29.1 [8.5]	27.8 [8.2]	25.9 [7.6]	35.0 [10.2]	33.4 [9.8]	31.1 [9.1]	
	Power	5.1	5.1	5.0	5.1	5.0	5.0	5.1	5.0	5.0	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA13060A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1870 [883]	1700 [802]	1440 [680]	1870 [883]	1700 [802]	1440 [680]	1870 [883]	1700 [802]	1440 [680]
DR ①			0.14	0.13	0.11	0.14	0.13	0.11	0.14	0.13	0.11
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	72.1 [21.1] 40.6 [11.9] 3.5	70.8 [20.7] 38.8 [11.4] 3.5	68.8 [20.2] 36.0 [10.6] 3.5	67.8 [19.9] 47.8 [14.0] 3.5	66.6 [19.5] 45.7 [13.4] 3.5	64.7 [19.0] 42.4 [12.4] 3.4	63.6 [18.6] 54.4 [16.0] 3.5	62.4 [18.3] 52.0 [15.2] 3.5	60.7 [17.8] 48.3 [14.2] 3.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	70.3 [20.6] 39.6 [11.6] 3.7	69.0 [20.2] 37.8 [11.1] 3.7	67.1 [19.7] 35.1 [10.3] 3.7	66.0 [19.3] 46.7 [13.7] 3.7	64.8 [19.0] 44.7 [13.1] 3.7	63.0 [18.5] 41.5 [12.2] 3.6	61.8 [18.1] 53.4 [15.6] 3.7	60.7 [17.8] 51.0 [15.0] 3.6	59.0 [17.3] 47.4 [13.9] 3.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	68.4 [20.0] 38.5 [11.3] 4.0	67.1 [19.7] 36.8 [10.8] 3.9	65.3 [19.1] 34.1 [10.0] 3.9	64.1 [18.8] 45.7 [13.4] 3.9	62.9 [18.4] 43.6 [12.8] 3.9	61.2 [17.9] 40.5 [11.9] 3.8	59.9 [17.5] 52.3 [15.3] 3.9	58.8 [17.2] 50.0 [14.6] 3.9	57.2 [16.7] 46.4 [13.6] 3.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	66.4 [19.5] 37.3 [10.9] 4.2	65.2 [19.1] 35.7 [10.5] 4.1	63.4 [18.6] 33.1 [9.7] 4.1	62.1 [18.2] 44.5 [13.1] 4.2	61.0 [17.9] 42.6 [12.5] 4.1	59.3 [17.4] 39.5 [11.6] 4.1	57.9 [17.0] 51.2 [15.0] 4.1	56.8 [16.7] 48.9 [14.3] 4.1	55.3 [16.2] 45.4 [13.3] 4.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	64.3 [18.8] 36.2 [10.6] 4.4	63.2 [18.5] 34.6 [10.1] 4.4	61.4 [18.0] 32.1 [9.4] 4.3	60.0 [17.6] 43.4 [12.7] 4.4	58.9 [17.3] 41.4 [12.1] 4.4	57.3 [16.8] 38.5 [11.3] 4.3	55.8 [16.4] 50.0 [14.7] 4.4	54.8 [16.1] 47.8 [14.0] 4.3	53.3 [15.6] 44.4 [13.0] 4.3
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	62.1 [18.2] 35.0 [10.3] 4.7	61.0 [17.9] 33.4 [9.8] 4.7	59.3 [17.4] 31.0 [9.1] 4.6	57.9 [17.0] 42.2 [12.4] 4.7	56.8 [16.7] 40.3 [11.8] 4.6	55.2 [16.2] 37.4 [11.0] 4.6	53.6 [15.7] 48.8 [14.3] 4.7	52.7 [15.4] 46.7 [13.7] 4.6	51.2 [15.0] 43.3 [12.7] 4.5
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	59.9 [17.5] 33.8 [9.9] 5.0	58.8 [17.2] 32.3 [9.5] 5.0	57.2 [16.8] 30.0 [8.8] 4.9	55.6 [16.3] 41.0 [12.0] 5.0	54.6 [16.0] 39.1 [11.5] 4.9	53.1 [15.6] 36.3 [10.6] 4.9	51.4 [15.1] 47.6 [14.0] 4.9	50.5 [14.8] 45.5 [13.3] 4.9	49.1 [14.4] 42.2 [12.4] 4.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	57.6 [16.9] 32.5 [9.5] 5.3	56.5 [16.6] 31.0 [9.1] 5.3	55.0 [16.1] 28.8 [8.4] 5.2	53.3 [15.6] 39.7 [11.6] 5.3	52.3 [15.3] 37.9 [11.1] 5.2	50.9 [14.9] 35.2 [10.3] 5.2	49.0 [14.4] 46.3 [13.6] 5.2	48.2 [14.1] 44.3 [13.0] 5.2	46.8 [13.7] 41.1 [12.0] 5.1
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	55.1 [16.2] 31.2 [9.1] 5.6	54.1 [15.9] 29.8 [8.7] 5.6	52.6 [15.4] 27.7 [8.1] 5.5	50.8 [14.9] 38.4 [11.2] 5.6	49.9 [14.6] 36.7 [10.7] 5.5	48.5 [14.2] 34.0 [10.0] 5.5	46.6 [13.7] 45.0 [13.2] 5.6	45.8 [13.4] 43.0 [12.6] 5.5	44.5 [13.0] 40.0 [11.7] 5.4
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	52.6 [15.4] 29.8 [8.7] 6.0	51.7 [15.1] 28.5 [8.4] 5.9	50.2 [14.7] 26.5 [7.8] 5.8	48.3 [14.2] 37.0 [10.8] 5.9	47.5 [13.9] 35.4 [10.4] 5.9	46.1 [13.5] 32.8 [9.6] 5.8	44.1 [12.9] 43.7 [12.8] 5.9	43.3 [12.7] 41.7 [12.2] 5.9	42.1 [12.3] 38.8 [11.4] 5.8
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.0 [14.7] 28.5 [8.3] 6.3	49.1 [14.4] 27.2 [8.0] 6.3	47.8 [14.0] 25.2 [7.4] 6.2	45.7 [13.4] 35.6 [10.4] 6.3	44.9 [13.2] 34.1 [10.0] 6.2	43.7 [12.8] 31.6 [9.3] 6.2	41.5 [12.2] 41.5 [12.2] 6.3	40.8 [11.9] 40.4 [11.8] 6.2	39.6 [11.6] 37.5 [11.0] 6.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14024A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			990 [467]	900 [425]	760 [359]	990 [467]	900 [425]	760 [359]	990 [467]	900 [425]	760 [359]
DR ①			0.18	0.15	0.12	0.18	0.15	0.12	0.18	0.15	0.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	31.2 [9.1]	30.6 [9.0]	29.7 [8.7]	29.3 [8.6]	28.8 [8.4]	28.0 [8.2]	27.8 [8.2]	27.3 [8.0]	26.6 [7.8]
		Sens BTUH [kW]	19.3 [5.7]	18.5 [5.4]	17.1 [5.0]	22.6 [6.6]	21.6 [6.3]	20.0 [5.9]	25.3 [7.4]	24.2 [7.1]	22.5 [6.6]
		Power	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
	80 [26.7]	Total BTUH [kW]	30.1 [8.8]	29.6 [8.7]	28.8 [8.4]	28.3 [8.3]	27.8 [8.2]	27.0 [7.9]	26.8 [7.9]	26.3 [7.7]	25.6 [7.5]
		Sens BTUH [kW]	18.7 [5.5]	17.9 [5.2]	16.6 [4.9]	22.0 [6.4]	21.0 [6.2]	19.5 [5.7]	24.7 [7.2]	23.6 [6.9]	21.9 [6.4]
		Power	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	85 [29.4]	Total BTUH [kW]	29.1 [8.5]	28.6 [8.4]	27.8 [8.1]	27.3 [8.0]	26.8 [7.9]	26.1 [7.6]	25.8 [7.6]	25.4 [7.4]	24.6 [7.2]
		Sens BTUH [kW]	18.1 [5.3]	17.3 [5.1]	16.0 [4.7]	21.4 [6.3]	20.4 [6.0]	18.9 [5.5]	24.1 [7.1]	23.0 [6.8]	21.4 [6.3]
		Power	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
	90 [32.2]	Total BTUH [kW]	28.1 [8.2]	27.6 [8.1]	26.8 [7.9]	26.3 [7.7]	25.8 [7.6]	25.1 [7.4]	24.8 [7.3]	24.4 [7.1]	23.7 [6.9]
		Sens BTUH [kW]	17.5 [5.1]	16.7 [4.9]	15.5 [4.5]	20.8 [6.1]	19.8 [5.8]	18.4 [5.4]	23.5 [6.9]	22.5 [6.6]	20.8 [6.1]
		Power	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
95 [35]	Total BTUH [kW]	27.1 [7.9]	26.6 [7.8]	25.9 [7.6]	25.3 [7.4]	24.9 [7.3]	24.2 [7.1]	23.8 [7.0]	23.4 [6.8]	22.7 [6.7]	
	Sens BTUH [kW]	16.9 [5.0]	16.1 [4.7]	15.0 [4.4]	20.2 [5.9]	19.3 [5.6]	17.9 [5.2]	22.9 [6.7]	21.9 [6.4]	20.3 [5.9]	
	Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
100 [37.8]	Total BTUH [kW]	26.1 [7.6]	25.6 [7.5]	24.9 [7.3]	24.3 [7.1]	23.9 [7.0]	23.2 [6.8]	22.8 [6.7]	22.4 [6.6]	21.7 [6.4]	
	Sens BTUH [kW]	16.3 [4.8]	15.6 [4.6]	14.4 [4.2]	19.6 [5.7]	18.7 [5.5]	17.3 [5.1]	22.3 [6.5]	21.3 [6.2]	19.8 [5.8]	
	Power	2.0	1.9	1.9	2.0	1.9	1.9	2.0	1.9	1.9	
105 [40.6]	Total BTUH [kW]	25.1 [7.4]	24.6 [7.2]	23.9 [7.0]	23.3 [6.8]	22.9 [6.7]	22.2 [6.5]	21.8 [6.4]	21.4 [6.3]	20.8 [6.1]	
	Sens BTUH [kW]	15.7 [4.6]	15.0 [4.4]	13.9 [4.1]	19.0 [5.6]	18.1 [5.3]	16.8 [4.9]	21.7 [6.4]	20.7 [6.1]	19.2 [5.6]	
	Power	2.1	2.1	2.1	2.1	2.1	2.0	2.1	2.1	2.0	
110 [43.3]	Total BTUH [kW]	24.1 [7.1]	23.6 [6.9]	23.0 [6.7]	22.3 [6.5]	21.9 [6.4]	21.2 [6.2]	20.7 [6.1]	20.4 [6.0]	19.8 [5.8]	
	Sens BTUH [kW]	15.1 [4.4]	14.4 [4.2]	13.4 [3.9]	18.4 [5.4]	17.5 [5.1]	16.3 [4.8]	20.7 [6.1]	20.2 [5.9]	18.7 [5.5]	
	Power	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
115 [46.1]	Total BTUH [kW]	23.1 [6.8]	22.6 [6.6]	22.0 [6.4]	21.2 [6.2]	20.9 [6.1]	20.3 [5.9]	19.7 [5.8]	19.4 [5.7]	18.8 [5.5]	
	Sens BTUH [kW]	14.5 [4.3]	13.9 [4.1]	12.9 [3.8]	17.8 [5.2]	17.0 [5.0]	15.7 [4.6]	19.7 [5.8]	19.4 [5.7]	18.2 [5.3]	
	Power	2.4	2.4	2.3	2.4	2.4	2.3	2.4	2.4	2.3	
120 [48.9]	Total BTUH [kW]	22.0 [6.5]	21.6 [6.3]	21.0 [6.2]	20.2 [5.9]	19.9 [5.8]	19.3 [5.7]	18.7 [5.5]	18.4 [5.4]	17.9 [5.2]	
	Sens BTUH [kW]	13.9 [4.1]	13.3 [3.9]	12.3 [3.6]	17.2 [5.0]	16.4 [4.8]	15.2 [4.5]	18.7 [5.5]	18.4 [5.4]	17.7 [5.2]	
	Power	2.6	2.5	2.5	2.6	2.5	2.5	2.6	2.5	2.5	
125 [51.7]	Total BTUH [kW]	21.0 [6.2]	20.6 [6.0]	20.1 [5.9]	19.2 [5.6]	18.9 [5.5]	18.3 [5.4]	17.7 [5.2]	17.4 [5.1]	16.9 [4.9]	
	Sens BTUH [kW]	13.3 [3.9]	12.7 [3.7]	11.8 [3.5]	16.6 [4.9]	15.8 [4.6]	14.7 [4.3]	17.7 [5.2]	17.4 [5.1]	16.9 [4.9]	
	Power	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14030A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1100 [519]	1000 [472]	850 [401]	1100 [519]	1000 [472]	850 [401]	1100 [519]	1000 [472]	850 [401]
DR ①			0.16	0.15	0.11	0.16	0.15	0.11	0.16	0.15	0.11
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	37.0 [10.9]	36.4 [10.7]	35.4 [10.4]	35.0 [10.3]	34.4 [10.1]	33.4 [9.8]	33.2 [9.7]	32.6 [9.6]	31.7 [9.3]
		Sens BTUH [kW]	21.6 [6.3]	20.6 [6.0]	19.2 [5.6]	25.6 [7.5]	24.4 [7.2]	22.7 [6.7]	28.8 [8.4]	27.5 [8.1]	25.6 [7.5]
		Power	1.7	1.6	1.6	1.7	1.6	1.6	1.6	1.6	1.6
	80 [26.7]	Total BTUH [kW]	36.0 [10.5]	35.4 [10.4]	34.4 [10.1]	33.9 [9.9]	33.3 [9.8]	32.4 [9.5]	32.2 [9.4]	31.6 [9.3]	30.7 [9.0]
		Sens BTUH [kW]	21.1 [6.2]	20.1 [5.9]	18.7 [5.5]	25.1 [7.4]	24.0 [7.0]	22.3 [6.5]	28.3 [8.3]	27.0 [7.9]	25.1 [7.4]
		Power	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
	85 [29.4]	Total BTUH [kW]	34.9 [10.2]	34.3 [10.1]	33.4 [9.8]	32.9 [9.6]	32.3 [9.5]	31.4 [9.2]	31.1 [9.1]	30.6 [9.0]	29.7 [8.7]
		Sens BTUH [kW]	20.6 [6.0]	19.7 [5.8]	18.3 [5.4]	24.6 [7.2]	23.5 [6.9]	21.8 [6.4]	27.8 [8.1]	26.5 [7.8]	24.7 [7.2]
		Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	90 [32.2]	Total BTUH [kW]	33.9 [9.9]	33.3 [9.7]	32.3 [9.5]	31.8 [9.3]	31.2 [9.2]	30.4 [8.9]	30.0 [8.8]	29.5 [8.6]	28.7 [8.4]
		Sens BTUH [kW]	20.1 [5.9]	19.2 [5.6]	17.8 [5.2]	24.1 [7.1]	23.0 [6.7]	21.4 [6.3]	27.3 [8.0]	26.0 [7.6]	24.2 [7.1]
Power		1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
95 [35]	Total BTUH [kW]	32.8 [9.6]	32.2 [9.4]	31.3 [9.2]	30.7 [9.0]	30.2 [8.8]	29.3 [8.6]	28.9 [8.5]	28.4 [8.3]	27.6 [8.1]	
	Sens BTUH [kW]	19.5 [5.7]	18.6 [5.5]	17.3 [5.1]	23.5 [6.9]	22.5 [6.6]	20.9 [6.1]	26.7 [7.8]	25.5 [7.5]	23.7 [7.0]	
	Power	2.1	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
100 [37.8]	Total BTUH [kW]	31.6 [9.3]	31.1 [9.1]	30.2 [8.9]	29.6 [8.7]	29.1 [8.5]	28.3 [8.3]	27.8 [8.2]	27.3 [8.0]	26.6 [7.8]	
	Sens BTUH [kW]	18.9 [5.5]	18.1 [5.3]	16.8 [4.9]	22.9 [6.7]	21.9 [6.4]	20.4 [6.0]	26.1 [7.7]	25.0 [7.3]	23.2 [6.8]	
	Power	2.2	2.2	2.1	2.2	2.1	2.1	2.2	2.1	2.1	
105 [40.6]	Total BTUH [kW]	30.5 [8.9]	30.0 [8.8]	29.2 [8.5]	28.5 [8.3]	28.0 [8.2]	27.2 [8.0]	26.7 [7.8]	26.2 [7.7]	25.5 [7.5]	
	Sens BTUH [kW]	18.3 [5.4]	17.5 [5.1]	16.3 [4.8]	22.3 [6.5]	21.3 [6.2]	19.8 [5.8]	25.5 [7.5]	24.4 [7.1]	22.7 [6.6]	
	Power	2.3	2.3	2.3	2.3	2.3	2.2	2.3	2.3	2.2	
110 [43.3]	Total BTUH [kW]	29.4 [8.6]	28.8 [8.5]	28.1 [8.2]	27.3 [8.0]	26.8 [7.9]	26.1 [7.6]	25.5 [7.5]	25.1 [7.4]	24.4 [7.2]	
	Sens BTUH [kW]	17.7 [5.2]	16.9 [5.0]	15.7 [4.6]	21.7 [6.4]	20.7 [6.1]	19.3 [5.6]	24.9 [7.3]	23.8 [7.0]	22.1 [6.5]	
	Power	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
115 [46.1]	Total BTUH [kW]	28.2 [8.3]	27.7 [8.1]	26.9 [7.9]	26.1 [7.7]	25.7 [7.5]	25.0 [7.3]	24.4 [7.1]	23.9 [7.0]	23.3 [6.8]	
	Sens BTUH [kW]	17.0 [5.0]	16.3 [4.8]	15.1 [4.4]	21.0 [6.2]	20.1 [5.9]	18.7 [5.5]	24.2 [7.1]	23.1 [6.8]	21.5 [6.3]	
	Power	2.6	2.6	2.5	2.6	2.6	2.5	2.6	2.5	2.5	
120 [48.9]	Total BTUH [kW]	27.0 [7.9]	26.5 [7.8]	25.8 [7.6]	25.0 [7.3]	24.5 [7.2]	23.9 [7.0]	23.2 [6.8]	22.8 [6.7]	22.2 [6.5]	
	Sens BTUH [kW]	16.3 [4.8]	15.6 [4.6]	14.5 [4.3]	20.3 [6.0]	19.4 [5.7]	18.1 [5.3]	23.2 [6.8]	22.5 [6.6]	20.9 [6.1]	
	Power	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
125 [51.7]	Total BTUH [kW]	25.8 [7.6]	25.4 [7.4]	24.7 [7.2]	23.8 [7.0]	23.3 [6.8]	22.7 [6.7]	22.0 [6.4]	21.6 [6.3]	21.0 [6.2]	
	Sens BTUH [kW]	15.6 [4.6]	14.9 [4.4]	13.9 [4.1]	19.6 [5.8]	18.8 [5.5]	17.4 [5.1]	22.0 [6.4]	21.6 [6.3]	20.3 [5.9]	
	Power	2.9	2.9	2.8	2.9	2.9	2.8	2.9	2.9	2.8	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14036A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]
DR ①			0.23	0.21	0.18	0.23	0.21	0.18	0.23	0.21	0.18
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	44.3 [13.0] 25.4 [7.4] 2.0	43.5 [12.8] 24.2 [7.1] 2.0	42.3 [12.4] 22.5 [6.6] 2.0	41.4 [12.1] 29.6 [8.7] 2.0	40.6 [11.9] 28.3 [8.3] 2.0	39.5 [11.6] 26.3 [7.7] 2.0	38.3 [11.2] 32.8 [9.6] 2.0	37.6 [11.0] 31.3 [9.2] 2.0	36.6 [10.7] 29.1 [8.5] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	43.0 [12.6] 24.7 [7.2] 2.1	42.2 [12.4] 23.6 [6.9] 2.1	41.1 [12.0] 21.9 [6.4] 2.1	40.0 [11.7] 28.9 [8.5] 2.1	39.3 [11.5] 27.6 [8.1] 2.1	38.2 [11.2] 25.7 [7.5] 2.1	37.0 [10.8] 32.1 [9.4] 2.1	36.3 [10.6] 30.7 [9.0] 2.1	35.3 [10.3] 28.5 [8.4] 2.1
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	41.7 [12.2] 24.0 [7.0] 2.3	40.9 [12.0] 22.9 [6.7] 2.2	39.8 [11.7] 21.3 [6.2] 2.2	38.7 [11.3] 28.2 [8.3] 2.2	38.0 [11.1] 27.0 [7.9] 2.2	37.0 [10.8] 25.1 [7.3] 2.2	35.6 [10.4] 31.4 [9.2] 2.2	35.0 [10.3] 30.0 [8.8] 2.2	34.0 [10.0] 27.9 [8.2] 2.2
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	40.3 [11.8] 23.2 [6.8] 2.4	39.6 [11.6] 22.2 [6.5] 2.4	38.5 [11.3] 20.7 [6.1] 2.3	37.3 [10.9] 27.5 [8.1] 2.4	36.7 [10.7] 26.3 [7.7] 2.4	35.7 [10.5] 24.4 [7.2] 2.3	34.3 [10.0] 30.7 [9.0] 2.4	33.7 [9.9] 29.3 [8.6] 2.4	32.7 [9.6] 27.3 [8.0] 2.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	38.9 [11.4] 22.5 [6.6] 2.5	38.3 [11.2] 21.5 [6.3] 2.5	37.2 [10.9] 20.0 [5.9] 2.5	36.0 [10.5] 26.7 [7.8] 2.5	35.3 [10.4] 25.5 [7.5] 2.5	34.4 [10.1] 23.7 [7.0] 2.5	32.9 [9.6] 29.9 [8.8] 2.5	32.3 [9.5] 28.6 [8.4] 2.5	31.4 [9.2] 26.6 [7.8] 2.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	37.6 [11.0] 21.7 [6.4] 2.7	36.9 [10.8] 20.7 [6.1] 2.7	35.9 [10.5] 19.3 [5.7] 2.6	34.6 [10.1] 25.9 [7.6] 2.7	34.0 [10.0] 24.8 [7.3] 2.7	33.0 [9.7] 23.0 [6.8] 2.6	31.5 [9.2] 29.1 [8.5] 2.7	30.9 [9.1] 27.8 [8.2] 2.6	30.1 [8.8] 25.9 [7.6] 2.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	36.1 [10.6] 20.9 [6.1] 2.9	35.5 [10.4] 20.0 [5.8] 2.8	34.5 [10.1] 18.6 [5.4] 2.8	33.2 [9.7] 25.1 [7.4] 2.8	32.6 [9.5] 24.0 [7.0] 2.8	31.7 [9.3] 22.3 [6.5] 2.8	30.1 [8.8] 28.3 [8.3] 2.8	29.6 [8.7] 27.1 [7.9] 2.8	28.7 [8.4] 25.2 [7.4] 2.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	34.7 [10.2] 20.1 [5.9] 3.0	34.1 [10.0] 19.2 [5.6] 3.0	33.2 [9.7] 17.8 [5.2] 3.0	31.7 [9.3] 24.3 [7.1] 3.0	31.2 [9.1] 23.2 [6.8] 3.0	30.3 [8.9] 21.6 [6.3] 3.0	28.7 [8.4] 27.5 [8.1] 3.0	28.2 [8.3] 26.3 [7.7] 3.0	27.4 [8.0] 24.4 [7.2] 3.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	33.3 [9.8] 19.2 [5.6] 3.2	32.7 [9.6] 18.3 [5.4] 3.2	31.8 [9.3] 17.0 [5.0] 3.2	30.3 [8.9] 23.4 [6.9] 3.2	29.8 [8.7] 22.4 [6.6] 3.2	28.9 [8.5] 20.8 [6.1] 3.2	27.2 [8.0] 26.6 [7.8] 3.2	26.7 [7.8] 25.4 [7.5] 3.2	26.0 [7.6] 23.7 [6.9] 3.1
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	31.8 [9.3] 18.3 [5.4] 3.4	31.2 [9.2] 17.5 [5.1] 3.4	30.4 [8.9] 16.3 [4.8] 3.4	28.8 [8.5] 22.5 [6.6] 3.4	28.3 [8.3] 21.5 [6.3] 3.4	27.5 [8.1] 20.0 [5.9] 3.4	25.8 [7.5] 25.7 [7.5] 3.4	25.3 [7.4] 24.6 [7.2] 3.4	24.6 [7.2] 22.9 [6.7] 3.3
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	30.3 [8.9] 17.4 [5.1] 3.6	29.8 [8.7] 16.6 [4.9] 3.6	29.0 [8.5] 15.4 [4.5] 3.6	27.4 [8.0] 21.6 [6.3] 3.6	26.9 [7.9] 20.7 [6.1] 3.6	26.1 [7.7] 19.2 [5.6] 3.6	24.3 [7.1] 24.3 [7.1] 3.6	23.8 [7.0] 23.7 [6.9] 3.6	23.2 [6.8] 22.0 [6.5] 3.6

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14042A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]
DR ①			0.15	0.14	0.1	0.15	0.14	0.1	0.15	0.14	0.1
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	50.0 [14.7] 29.2 [8.5] 2.4	49.1 [14.4] 27.9 [8.2] 2.4	47.7 [14.0] 25.9 [7.6] 2.3	47.3 [13.9] 34.3 [10.0] 2.4	46.4 [13.6] 32.7 [9.6] 2.3	45.1 [13.2] 30.4 [8.9] 2.3	44.3 [13.0] 38.5 [11.3] 2.3	43.5 [12.8] 36.8 [10.8] 2.3	42.3 [12.4] 34.2 [10.0] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	48.7 [14.3] 28.5 [8.4] 2.5	47.9 [14.0] 27.3 [8.0] 2.5	46.5 [13.6] 25.3 [7.4] 2.5	46.0 [13.5] 33.7 [9.9] 2.5	45.2 [13.2] 32.2 [9.4] 2.5	43.9 [12.9] 29.8 [8.7] 2.4	43.0 [12.6] 37.9 [11.1] 2.5	42.3 [12.4] 36.2 [10.6] 2.5	41.1 [12.0] 33.6 [9.9] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	47.4 [13.9] 27.9 [8.2] 2.7	46.6 [13.6] 26.6 [7.8] 2.6	45.2 [13.3] 24.7 [7.2] 2.6	44.7 [13.1] 33.0 [9.7] 2.6	43.9 [12.9] 31.5 [9.2] 2.6	42.6 [12.5] 29.3 [8.6] 2.6	41.7 [12.2] 37.2 [10.9] 2.6	41.0 [12.0] 35.6 [10.4] 2.6	39.8 [11.7] 33.0 [9.7] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	46.0 [13.5] 27.2 [8.0] 2.8	45.2 [13.2] 26.0 [7.6] 2.8	43.9 [12.9] 24.1 [7.1] 2.8	43.3 [12.7] 32.3 [9.5] 2.8	42.5 [12.5] 30.8 [9.0] 2.8	41.3 [12.1] 28.6 [8.4] 2.7	40.3 [11.8] 36.5 [10.7] 2.8	39.6 [11.6] 34.9 [10.2] 2.8	38.5 [11.3] 32.4 [9.5] 2.7
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	44.6 [13.1] 26.4 [7.7] 3.0	43.8 [12.8] 25.2 [7.4] 3.0	42.6 [12.5] 23.4 [6.9] 2.9	41.8 [12.3] 31.5 [9.2] 3.0	41.1 [12.0] 30.1 [8.8] 3.0	39.9 [11.7] 27.9 [8.2] 2.9	38.9 [11.4] 35.8 [10.5] 3.0	38.2 [11.2] 34.2 [10.0] 2.9	37.1 [10.9] 31.7 [9.3] 2.9
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.6] 25.6 [7.5] 3.2	42.3 [12.4] 24.4 [7.2] 3.1	41.1 [12.1] 22.7 [6.6] 3.1	40.4 [11.8] 30.7 [9.0] 3.2	39.6 [11.6] 29.3 [8.6] 3.1	38.5 [11.3] 27.2 [8.0] 3.1	37.4 [11.0] 34.9 [10.2] 3.1	36.7 [10.8] 33.4 [9.8] 3.1	35.7 [10.5] 31.0 [9.1] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	41.6 [12.2] 24.7 [7.2] 3.4	40.8 [12.0] 23.6 [6.9] 3.3	39.7 [11.6] 21.9 [6.4] 3.3	38.8 [11.4] 29.8 [8.7] 3.3	38.1 [11.2] 28.5 [8.3] 3.3	37.1 [10.9] 26.4 [7.7] 3.3	35.9 [10.5] 34.1 [10.0] 3.3	35.2 [10.3] 32.5 [9.5] 3.3	34.3 [10.0] 30.2 [8.8] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	40.0 [11.7] 23.8 [7.0] 3.6	39.3 [11.5] 22.7 [6.7] 3.5	38.2 [11.2] 21.1 [6.2] 3.5	37.2 [10.9] 28.9 [8.5] 3.5	36.6 [10.7] 27.6 [8.1] 3.5	35.6 [10.4] 25.6 [7.5] 3.5	34.3 [10.0] 33.1 [9.7] 3.5	33.7 [9.9] 31.6 [9.3] 3.5	32.7 [9.6] 29.4 [8.6] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	38.3 [11.2] 22.8 [6.7] 3.8	37.7 [11.0] 21.8 [6.4] 3.7	36.6 [10.7] 20.2 [5.9] 3.7	35.6 [10.4] 27.9 [8.2] 3.8	35.0 [10.2] 26.6 [7.8] 3.7	34.0 [10.0] 24.7 [7.2] 3.7	32.7 [9.6] 32.1 [9.4] 3.7	32.1 [9.4] 30.7 [9.0] 3.7	31.2 [9.1] 28.5 [8.4] 3.7
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	36.7 [10.7] 21.7 [6.4] 4.0	36.0 [10.6] 20.8 [6.1] 4.0	35.0 [10.3] 19.3 [5.6] 3.9	33.9 [9.9] 26.8 [7.9] 4.0	33.3 [9.8] 25.6 [7.5] 3.9	32.4 [9.5] 23.8 [7.0] 3.9	31.0 [9.1] 31.0 [9.1] 4.0	30.4 [8.9] 29.7 [8.7] 3.9	29.6 [8.7] 27.6 [8.1] 3.9
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	34.9 [10.2] 20.6 [6.1] 4.2	34.3 [10.1] 19.7 [5.8] 4.2	33.3 [9.8] 18.3 [5.4] 4.1	32.2 [9.4] 25.8 [7.5] 4.2	31.6 [9.3] 24.6 [7.2] 4.2	30.7 [9.0] 22.8 [6.7] 4.1	29.2 [8.6] 29.2 [8.6] 4.2	28.7 [8.4] 28.7 [8.4] 4.1	27.9 [8.2] 26.6 [7.8] 4.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14048A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]
DR ①			0.21	0.19	0.17	0.21	0.19	0.17	0.21	0.19	0.17
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	58.8 [17.2]	57.8 [16.9]	56.3 [16.5]	55.4 [16.2]	54.4 [15.9]	53.0 [15.5]	52.6 [15.4]	51.7 [15.1]	50.3 [14.7]
		Sens BTUH [kW]	33.0 [9.7]	31.6 [9.3]	29.4 [8.6]	39.1 [11.5]	37.4 [11.0]	34.8 [10.2]	45.0 [13.2]	43.0 [12.6]	40.1 [11.7]
		Power	2.8	2.8	2.7	2.8	2.7	2.7	2.7	2.7	2.7
	80 [26.7]	Total BTUH [kW]	57.1 [16.7]	56.1 [16.4]	54.6 [16.0]	53.6 [15.7]	52.7 [15.4]	51.3 [15.0]	50.8 [14.9]	49.9 [14.6]	48.6 [14.2]
		Sens BTUH [kW]	32.2 [9.4]	30.8 [9.0]	28.7 [8.4]	38.3 [11.2]	36.6 [10.7]	34.1 [10.0]	44.2 [12.9]	42.3 [12.4]	39.3 [11.5]
		Power	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.8
	85 [29.4]	Total BTUH [kW]	55.3 [16.2]	54.4 [15.9]	52.9 [15.5]	51.9 [15.2]	51.0 [14.9]	49.6 [14.5]	49.1 [14.4]	48.2 [14.1]	46.9 [13.7]
		Sens BTUH [kW]	31.4 [9.2]	30.0 [8.8]	27.9 [8.2]	37.4 [11.0]	35.8 [10.5]	33.3 [9.8]	43.3 [12.7]	41.4 [12.1]	38.6 [11.3]
		Power	3.1	3.1	3.0	3.1	3.1	3.0	3.1	3.0	3.0
	90 [32.2]	Total BTUH [kW]	53.6 [15.7]	52.6 [15.4]	51.2 [15.0]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]	47.3 [13.9]	46.5 [13.6]	45.2 [13.3]
		Sens BTUH [kW]	30.4 [8.9]	29.1 [8.5]	27.1 [7.9]	36.5 [10.7]	34.9 [10.2]	32.5 [9.5]	42.4 [12.4]	40.6 [11.9]	37.8 [11.1]
Power		3.3	3.3	3.2	3.3	3.2	3.2	3.2	3.2	3.2	
95 [35]	Total BTUH [kW]	51.8 [15.2]	50.9 [14.9]	49.5 [14.5]	48.4 [14.2]	47.5 [13.9]	46.3 [13.6]	45.6 [13.4]	44.8 [13.1]	43.6 [12.8]	
	Sens BTUH [kW]	29.5 [8.6]	28.2 [8.3]	26.3 [7.7]	35.6 [10.4]	34.0 [10.0]	31.7 [9.3]	41.5 [12.1]	39.7 [11.6]	36.9 [10.8]	
	Power	3.5	3.5	3.4	3.5	3.4	3.4	3.4	3.4	3.4	
100 [37.8]	Total BTUH [kW]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]	46.6 [13.7]	45.8 [13.4]	44.6 [13.1]	43.8 [12.8]	43.1 [12.6]	41.9 [12.3]	
	Sens BTUH [kW]	28.5 [8.4]	27.3 [8.0]	25.4 [7.4]	34.6 [10.1]	33.1 [9.7]	30.8 [9.0]	40.5 [11.9]	38.7 [11.3]	36.0 [10.6]	
	Power	3.7	3.7	3.6	3.7	3.7	3.6	3.7	3.6	3.6	
105 [40.6]	Total BTUH [kW]	48.4 [14.2]	47.5 [13.9]	46.2 [13.5]	44.9 [13.2]	44.1 [12.9]	42.9 [12.6]	42.1 [12.3]	41.4 [12.1]	40.3 [11.8]	
	Sens BTUH [kW]	27.5 [8.1]	26.3 [7.7]	24.5 [7.2]	33.6 [9.8]	32.1 [9.4]	29.9 [8.8]	39.4 [11.6]	37.7 [11.1]	35.1 [10.3]	
	Power	4.0	3.9	3.9	3.9	3.9	3.8	3.9	3.9	3.8	
110 [43.3]	Total BTUH [kW]	46.6 [13.7]	45.8 [13.4]	44.6 [13.1]	43.2 [12.7]	42.4 [12.4]	41.3 [12.1]	40.4 [11.8]	39.7 [11.6]	38.6 [11.3]	
	Sens BTUH [kW]	26.4 [7.7]	25.3 [7.4]	23.5 [6.9]	32.5 [9.5]	31.1 [9.1]	28.9 [8.5]	38.4 [11.2]	36.7 [10.8]	34.2 [10.0]	
	Power	4.2	4.2	4.1	4.2	4.2	4.1	4.2	4.1	4.1	
115 [46.1]	Total BTUH [kW]	44.9 [13.2]	44.1 [12.9]	42.9 [12.6]	41.5 [12.2]	40.8 [11.9]	39.7 [11.6]	38.7 [11.3]	38.0 [11.1]	37.0 [10.8]	
	Sens BTUH [kW]	25.3 [7.4]	24.2 [7.1]	22.6 [6.6]	31.4 [9.2]	30.0 [8.8]	28.0 [8.2]	37.3 [10.9]	35.7 [10.5]	33.2 [9.7]	
	Power	4.5	4.5	4.4	4.5	4.4	4.4	4.4	4.4	4.4	
120 [48.9]	Total BTUH [kW]	43.2 [12.7]	42.5 [12.4]	41.3 [12.1]	39.8 [11.7]	39.1 [11.4]	38.0 [11.1]	37.0 [10.8]	36.3 [10.6]	35.3 [10.4]	
	Sens BTUH [kW]	24.2 [7.1]	23.1 [6.8]	21.5 [6.3]	30.3 [8.9]	28.9 [8.5]	26.9 [7.9]	36.1 [10.6]	34.6 [10.1]	32.2 [9.4]	
	Power	4.8	4.8	4.7	4.8	4.7	4.7	4.7	4.7	4.6	
125 [51.7]	Total BTUH [kW]	41.5 [12.2]	40.8 [12.0]	39.7 [11.6]	38.1 [11.2]	37.4 [11.0]	36.4 [10.7]	35.3 [10.3]	34.6 [10.2]	33.7 [9.9]	
	Sens BTUH [kW]	23.0 [6.7]	22.0 [6.4]	20.5 [6.0]	29.1 [8.5]	27.8 [8.2]	25.9 [7.6]	35.0 [10.2]	33.4 [9.8]	31.1 [9.1]	
	Power	5.1	5.1	5.0	5.1	5.0	5.0	5.1	5.0	5.0	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA14060A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1870 [883]	1700 [802]	1440 [680]	1870 [883]	1700 [802]	1440 [680]	1870 [883]	1700 [802]	1440 [680]
DR ①			0.14	0.13	0.11	0.14	0.13	0.11	0.14	0.13	0.11
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	72.1 [21.1] 40.6 [11.9] 3.5	70.8 [20.7] 38.8 [11.4] 3.5	68.8 [20.2] 36.0 [10.6] 3.5	67.8 [19.9] 47.8 [14.0] 3.5	66.6 [19.5] 45.7 [13.4] 3.5	64.7 [19.0] 42.4 [12.4] 3.4	63.6 [18.6] 54.4 [16.0] 3.5	62.4 [18.3] 52.0 [15.2] 3.5	60.7 [17.8] 48.3 [14.2] 3.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	70.3 [20.6] 39.6 [11.6] 3.7	69.0 [20.2] 37.8 [11.1] 3.7	67.1 [19.7] 35.1 [10.3] 3.7	66.0 [19.3] 46.7 [13.7] 3.7	64.8 [19.0] 44.7 [13.1] 3.7	63.0 [18.5] 41.5 [12.2] 3.6	61.8 [18.1] 53.4 [15.6] 3.7	60.7 [17.8] 51.0 [15.0] 3.6	59.0 [17.3] 47.4 [13.9] 3.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	68.4 [20.0] 38.5 [11.3] 4.0	67.1 [19.7] 36.8 [10.8] 3.9	65.3 [19.1] 34.1 [10.0] 3.9	64.1 [18.8] 45.7 [13.4] 3.9	62.9 [18.4] 43.6 [12.8] 3.9	61.2 [17.9] 40.5 [11.9] 3.8	59.9 [17.5] 52.3 [15.3] 3.9	58.8 [17.2] 50.0 [14.6] 3.9	57.2 [16.7] 46.4 [13.6] 3.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	66.4 [19.5] 37.3 [10.9] 4.2	65.2 [19.1] 35.7 [10.5] 4.1	63.4 [18.6] 33.1 [9.7] 4.1	62.1 [18.2] 44.5 [13.1] 4.2	61.0 [17.9] 42.6 [12.5] 4.1	59.3 [17.4] 39.5 [11.6] 4.1	57.9 [17.0] 51.2 [15.0] 4.1	56.8 [16.7] 48.9 [14.3] 4.1	55.3 [16.2] 45.4 [13.3] 4.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	64.3 [18.8] 36.2 [10.6] 4.4	63.2 [18.5] 34.6 [10.1] 4.4	61.4 [18.0] 32.1 [9.4] 4.3	60.0 [17.6] 43.4 [12.7] 4.4	58.9 [17.3] 41.4 [12.1] 4.4	57.3 [16.8] 38.5 [11.3] 4.3	55.8 [16.4] 50.0 [14.7] 4.4	54.8 [16.1] 47.8 [14.0] 4.3	53.3 [15.6] 44.4 [13.0] 4.3
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	62.1 [18.2] 35.0 [10.3] 4.7	61.0 [17.9] 33.4 [9.8] 4.7	59.3 [17.4] 31.0 [9.1] 4.6	57.9 [17.0] 42.2 [12.4] 4.7	56.8 [16.7] 40.3 [11.8] 4.6	55.2 [16.2] 37.4 [11.0] 4.6	53.6 [15.7] 48.8 [14.3] 4.7	52.7 [15.4] 46.7 [13.7] 4.6	51.2 [15.0] 43.3 [12.7] 4.5
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	59.9 [17.5] 33.8 [9.9] 5.0	58.8 [17.2] 32.3 [9.5] 5.0	57.2 [16.8] 30.0 [8.8] 4.9	55.6 [16.3] 41.0 [12.0] 5.0	54.6 [16.0] 39.1 [11.5] 4.9	53.1 [15.6] 36.3 [10.6] 4.9	51.4 [15.1] 47.6 [14.0] 4.9	50.5 [14.8] 45.5 [13.3] 4.9	49.1 [14.4] 42.2 [12.4] 4.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	57.6 [16.9] 32.5 [9.5] 5.3	56.5 [16.6] 31.0 [9.1] 5.3	55.0 [16.1] 28.8 [8.4] 5.2	53.3 [15.6] 39.7 [11.6] 5.3	52.3 [15.3] 37.9 [11.1] 5.2	50.9 [14.9] 35.2 [10.3] 5.2	49.0 [14.4] 46.3 [13.6] 5.2	48.2 [14.1] 44.3 [13.0] 5.2	46.8 [13.7] 41.1 [12.0] 5.1
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	55.1 [16.2] 31.2 [9.1] 5.6	54.1 [15.9] 29.8 [8.7] 5.6	52.6 [15.4] 27.7 [8.1] 5.5	50.8 [14.9] 38.4 [11.2] 5.6	49.9 [14.6] 36.7 [10.7] 5.5	48.5 [14.2] 34.0 [10.0] 5.5	46.6 [13.7] 45.0 [13.2] 5.6	45.8 [13.4] 43.0 [12.6] 5.5	44.5 [13.0] 40.0 [11.7] 5.4
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	52.6 [15.4] 29.8 [8.7] 6.0	51.7 [15.1] 28.5 [8.4] 5.9	50.2 [14.7] 26.5 [7.8] 5.8	48.3 [14.2] 37.0 [10.8] 5.9	47.5 [13.9] 35.4 [10.4] 5.9	46.1 [13.5] 32.8 [9.6] 5.8	44.1 [12.9] 43.7 [12.8] 5.9	43.3 [12.7] 41.7 [12.2] 5.9	42.1 [12.3] 38.8 [11.4] 5.8
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.0 [14.7] 28.5 [8.3] 6.3	49.1 [14.4] 27.2 [8.0] 6.3	47.8 [14.0] 25.2 [7.4] 6.2	45.7 [13.4] 35.6 [10.4] 6.3	44.9 [13.2] 34.1 [10.0] 6.2	43.7 [12.8] 31.6 [9.3] 6.2	41.5 [12.2] 41.5 [12.2] 6.3	40.8 [11.9] 40.4 [11.8] 6.2	39.6 [11.6] 37.5 [11.0] 6.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA15024A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			990 [467]	900 [425]	760 [359]	990 [467]	900 [425]	760 [359]	990 [467]	900 [425]	760 [359]
DR ①			0.21	0.19	0.15	0.21	0.19	0.15	0.21	0.19	0.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	30.9 [9.1]	30.4 [8.9]	29.5 [8.7]	29.1 [8.5]	28.6 [8.4]	27.8 [8.1]	27.5 [8.1]	27.0 [7.9]	26.2 [7.7]
		Sens BTUH [kW]	18.7 [5.5]	17.9 [5.2]	16.6 [4.9]	21.9 [6.4]	20.9 [6.1]	19.4 [5.7]	24.6 [7.2]	23.5 [6.9]	21.8 [6.4]
		Power	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
	80 [26.7]	Total BTUH [kW]	30.0 [8.8]	29.4 [8.6]	28.6 [8.4]	28.1 [8.2]	27.6 [8.1]	26.8 [7.9]	26.5 [7.8]	26.0 [7.6]	25.3 [7.4]
		Sens BTUH [kW]	18.2 [5.3]	17.4 [5.1]	16.1 [4.7]	21.4 [6.3]	20.4 [6.0]	18.9 [5.5]	24.0 [7.0]	23.0 [6.7]	21.3 [6.2]
		Power	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	85 [29.4]	Total BTUH [kW]	29.0 [8.5]	28.5 [8.3]	27.7 [8.1]	27.1 [8.0]	26.7 [7.8]	25.9 [7.6]	25.5 [7.5]	25.1 [7.3]	24.4 [7.1]
		Sens BTUH [kW]	17.6 [5.2]	16.8 [4.9]	15.6 [4.6]	20.8 [6.1]	19.9 [5.8]	18.4 [5.4]	23.5 [6.9]	22.4 [6.6]	20.8 [6.1]
		Power	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
	90 [32.2]	Total BTUH [kW]	28.0 [8.2]	27.5 [8.1]	26.7 [7.8]	26.1 [7.7]	25.7 [7.5]	25.0 [7.3]	24.5 [7.2]	24.1 [7.1]	23.4 [6.9]
Sens BTUH [kW]		17.0 [5.0]	16.3 [4.8]	15.1 [4.4]	20.2 [5.9]	19.3 [5.7]	17.9 [5.3]	22.9 [6.7]	21.9 [6.4]	20.3 [5.9]	
Power		1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	
95 [35]	Total BTUH [kW]	27.0 [7.9]	26.5 [7.8]	25.7 [7.5]	25.1 [7.4]	24.7 [7.2]	24.0 [7.0]	23.5 [6.9]	23.1 [6.8]	22.4 [6.6]	
	Sens BTUH [kW]	16.5 [4.8]	15.7 [4.6]	14.6 [4.3]	19.7 [5.8]	18.8 [5.5]	17.4 [5.1]	22.3 [6.5]	21.3 [6.2]	19.8 [5.8]	
	Power	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
100 [37.8]	Total BTUH [kW]	25.9 [7.6]	25.5 [7.5]	24.8 [7.3]	24.1 [7.1]	23.7 [6.9]	23.0 [6.7]	22.5 [6.6]	22.1 [6.5]	21.5 [6.3]	
	Sens BTUH [kW]	15.9 [4.6]	15.2 [4.4]	14.1 [4.1]	19.1 [5.6]	18.2 [5.3]	16.9 [5.0]	21.7 [6.4]	20.8 [6.1]	19.2 [5.6]	
	Power	2.0	2.0	1.9	2.0	2.0	1.9	2.0	1.9	1.9	
105 [40.6]	Total BTUH [kW]	24.9 [7.3]	24.5 [7.2]	23.8 [7.0]	23.1 [6.8]	22.6 [6.6]	22.0 [6.4]	21.4 [6.3]	21.1 [6.2]	20.5 [6.0]	
	Sens BTUH [kW]	15.3 [4.5]	14.6 [4.3]	13.5 [4.0]	18.5 [5.4]	17.7 [5.2]	16.4 [4.8]	21.1 [6.2]	20.2 [5.9]	18.7 [5.5]	
	Power	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.0	
110 [43.3]	Total BTUH [kW]	23.8 [7.0]	23.4 [6.9]	22.7 [6.7]	22.0 [6.4]	21.6 [6.3]	21.0 [6.1]	20.4 [6.0]	20.0 [5.9]	19.4 [5.7]	
	Sens BTUH [kW]	14.7 [4.3]	14.0 [4.1]	13.0 [3.8]	17.9 [5.2]	17.1 [5.0]	15.8 [4.6]	20.4 [6.0]	19.6 [5.7]	18.2 [5.3]	
	Power	2.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
115 [46.1]	Total BTUH [kW]	22.8 [6.7]	22.3 [6.5]	21.7 [6.4]	20.9 [6.1]	20.5 [6.0]	19.9 [5.8]	19.3 [5.7]	18.9 [5.6]	18.4 [5.4]	
	Sens BTUH [kW]	14.1 [4.1]	13.4 [3.9]	12.5 [3.6]	17.3 [5.1]	16.5 [4.8]	15.3 [4.5]	19.3 [5.7]	18.9 [5.6]	17.6 [5.2]	
	Power	2.4	2.4	2.3	2.4	2.4	2.3	2.4	2.4	2.3	
120 [48.9]	Total BTUH [kW]	21.7 [6.3]	21.3 [6.2]	20.7 [6.1]	19.8 [5.8]	19.5 [5.7]	18.9 [5.5]	18.2 [5.3]	17.9 [5.2]	17.4 [5.1]	
	Sens BTUH [kW]	13.4 [3.9]	12.8 [3.8]	11.9 [3.5]	16.6 [4.9]	15.9 [4.7]	14.7 [4.3]	18.2 [5.3]	17.9 [5.2]	17.1 [5.0]	
	Power	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
125 [51.7]	Total BTUH [kW]	20.5 [6.0]	20.2 [5.9]	19.6 [5.7]	18.7 [5.5]	18.4 [5.4]	17.8 [5.2]	17.1 [5.0]	16.8 [4.9]	16.3 [4.8]	
	Sens BTUH [kW]	12.8 [3.8]	12.2 [3.6]	11.3 [3.3]	16.0 [4.7]	15.3 [4.5]	14.2 [4.2]	17.1 [5.0]	16.8 [4.9]	16.3 [4.8]	
	Power	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.6	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA15030A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1070 [505]	975 [460]	830 [392]	1070 [505]	975 [460]	830 [392]	1070 [505]	975 [460]	830 [392]
DR ①			0.16	0.14	0.1	0.16	0.14	0.1	0.16	0.14	0.1
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	36.8 [10.8] 21.5 [6.3] 1.7	36.1 [10.6] 20.5 [6.0] 1.7	35.2 [10.3] 19.1 [5.6] 1.6	34.3 [10.1] 25.1 [7.4] 1.7	33.7 [9.9] 24.0 [7.0] 1.6	32.8 [9.6] 22.4 [6.6] 1.6	32.4 [9.5] 28.3 [8.3] 1.6	31.8 [9.3] 27.1 [7.9] 1.6	31.0 [9.1] 25.2 [7.4] 1.6
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	35.7 [10.5] 21.0 [6.1] 1.8	35.1 [10.3] 20.1 [5.9] 1.7	34.2 [10.0] 18.7 [5.5] 1.7	33.3 [9.7] 24.7 [7.2] 1.7	32.7 [9.6] 23.6 [6.9] 1.7	31.8 [9.3] 21.9 [6.4] 1.7	31.3 [9.2] 27.8 [8.2] 1.7	30.8 [9.0] 26.6 [7.8] 1.7	30.0 [8.8] 24.8 [7.3] 1.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	34.7 [10.2] 20.5 [6.0] 1.9	34.1 [10.0] 19.6 [5.7] 1.8	33.2 [9.7] 18.2 [5.3] 1.8	32.2 [9.4] 24.2 [7.1] 1.8	31.7 [9.3] 23.1 [6.8] 1.8	30.8 [9.0] 21.5 [6.3] 1.8	30.3 [8.9] 27.4 [8.0] 1.8	29.8 [8.7] 26.2 [7.7] 1.8	29.0 [8.5] 24.3 [7.1] 1.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	33.7 [9.9] 20.0 [5.9] 2.0	33.1 [9.7] 19.1 [5.6] 1.9	32.2 [9.4] 17.8 [5.2] 1.9	31.2 [9.1] 23.6 [6.9] 1.9	30.6 [9.0] 22.6 [6.6] 1.9	29.8 [8.7] 21.0 [6.2] 1.9	29.2 [8.6] 26.8 [7.9] 1.9	28.7 [8.4] 25.7 [7.5] 1.9	28.0 [8.2] 23.9 [7.0] 1.9
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	32.6 [9.5] 19.4 [5.7] 2.1	32.0 [9.4] 18.6 [5.4] 2.1	31.2 [9.1] 17.3 [5.1] 2.0	30.1 [8.8] 23.1 [6.8] 2.1	29.6 [8.7] 22.1 [6.5] 2.0	28.8 [8.4] 20.5 [6.0] 2.0	28.2 [8.3] 26.3 [7.7] 2.0	27.7 [8.1] 25.1 [7.4] 2.0	26.9 [7.9] 23.4 [6.9] 2.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	31.5 [9.2] 18.8 [5.5] 2.2	31.0 [9.1] 18.0 [5.3] 2.2	30.1 [8.8] 16.8 [4.9] 2.1	29.0 [8.5] 22.5 [6.6] 2.2	28.5 [8.4] 21.5 [6.3] 2.2	27.7 [8.1] 20.0 [5.9] 2.1	27.1 [7.9] 25.7 [7.5] 2.2	26.6 [7.8] 24.6 [7.2] 2.1	25.9 [7.6] 22.9 [6.7] 2.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	30.4 [8.9] 18.2 [5.3] 2.3	29.9 [8.8] 17.4 [5.1] 2.3	29.1 [8.5] 16.2 [4.8] 2.3	27.9 [8.2] 21.9 [6.4] 2.3	27.4 [8.0] 20.9 [6.1] 2.3	26.7 [7.8] 19.5 [5.7] 2.3	26.0 [7.6] 25.1 [7.4] 2.3	25.6 [7.5] 24.0 [7.0] 2.3	24.9 [7.3] 22.3 [6.5] 2.2
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	29.3 [8.6] 17.6 [5.2] 2.5	28.8 [8.4] 16.8 [4.9] 2.4	28.0 [8.2] 15.7 [4.6] 2.4	26.8 [7.9] 21.3 [6.2] 2.4	26.4 [7.7] 20.3 [6.0] 2.4	25.6 [7.5] 18.9 [5.5] 2.4	24.9 [7.3] 24.4 [7.2] 2.4	24.5 [7.2] 23.4 [6.9] 2.4	23.8 [7.0] 21.8 [6.4] 2.4
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	28.2 [8.3] 16.9 [5.0] 2.6	27.7 [8.1] 16.2 [4.7] 2.6	27.0 [7.9] 15.1 [4.4] 2.5	25.7 [7.5] 20.6 [6.0] 2.6	25.3 [7.4] 19.7 [5.8] 2.6	24.6 [7.2] 18.3 [5.4] 2.5	23.8 [7.0] 23.8 [7.0] 2.6	23.4 [6.8] 22.7 [6.7] 2.6	22.7 [6.7] 21.2 [6.2] 2.5
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	27.1 [7.9] 16.2 [4.8] 2.8	26.6 [7.8] 15.5 [4.5] 2.7	25.9 [7.6] 14.4 [4.2] 2.7	24.6 [7.2] 19.9 [5.8] 2.7	24.2 [7.1] 19.0 [5.6] 2.7	23.5 [6.9] 17.7 [5.2] 2.7	22.7 [6.6] 22.7 [6.6] 2.7	22.3 [6.5] 22.1 [6.5] 2.7	21.7 [6.3] 20.5 [6.0] 2.7
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	25.9 [7.6] 15.5 [4.5] 2.9	25.5 [7.5] 14.8 [4.3] 2.9	24.8 [7.3] 13.8 [4.0] 2.8	23.4 [6.9] 19.2 [5.6] 2.9	23.0 [6.7] 18.3 [5.4] 2.9	22.4 [6.6] 17.1 [5.0] 2.8	21.5 [6.3] 21.5 [6.3] 2.9	21.1 [6.2] 21.1 [6.2] 2.9	20.6 [6.0] 19.9 [5.8] 2.8

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA15036A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]	1320 [623]	1200 [566]	1020 [481]
DR ①			0.19	0.18	0.15	0.19	0.18	0.15	0.19	0.18	0.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	44.8 [13.1]	44.0 [12.9]	42.8 [12.5]	41.9 [12.3]	41.1 [12.1]	40.0 [11.7]	38.9 [11.4]	38.2 [11.2]	37.2 [10.9]
		Sens BTUH [kW]	26.2 [7.7]	25.0 [7.3]	23.3 [6.8]	30.6 [9.0]	29.2 [8.6]	27.2 [8.0]	33.9 [9.9]	32.4 [9.5]	30.1 [8.8]
		Power	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	80 [26.7]	Total BTUH [kW]	43.5 [12.8]	42.7 [12.5]	41.6 [12.2]	40.6 [11.9]	39.9 [11.7]	38.8 [11.4]	37.6 [11.0]	36.9 [10.8]	35.9 [10.5]
		Sens BTUH [kW]	25.4 [7.5]	24.3 [7.1]	22.6 [6.6]	29.9 [8.7]	28.5 [8.4]	26.5 [7.8]	33.2 [9.7]	31.7 [9.3]	29.5 [8.6]
		Power	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
	85 [29.4]	Total BTUH [kW]	42.2 [12.4]	41.4 [12.1]	40.3 [11.8]	39.3 [11.5]	38.6 [11.3]	37.5 [11.0]	36.3 [10.6]	35.6 [10.4]	34.6 [10.2]
		Sens BTUH [kW]	24.7 [7.2]	23.6 [6.9]	21.9 [6.4]	29.1 [8.5]	27.8 [8.1]	25.9 [7.6]	32.4 [9.5]	31.0 [9.1]	28.8 [8.4]
		Power	2.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	90 [32.2]	Total BTUH [kW]	40.9 [12.0]	40.1 [11.8]	39.0 [11.4]	37.9 [11.1]	37.2 [10.9]	36.2 [10.6]	34.9 [10.2]	34.3 [10.1]	33.4 [9.8]
Sens BTUH [kW]		23.9 [7.0]	22.9 [6.7]	21.3 [6.2]	28.3 [8.3]	27.1 [7.9]	25.2 [7.4]	31.6 [9.3]	30.2 [8.9]	28.1 [8.2]	
Power		2.4	2.4	2.3	2.4	2.4	2.3	2.4	2.3	2.3	
95 [35]	Total BTUH [kW]	39.5 [11.6]	38.8 [11.4]	37.7 [11.1]	36.6 [10.7]	35.9 [10.5]	34.9 [10.2]	33.6 [9.8]	33.0 [9.7]	32.1 [9.4]	
	Sens BTUH [kW]	23.1 [6.8]	22.1 [6.5]	20.6 [6.0]	27.5 [8.1]	26.3 [7.7]	24.5 [7.2]	30.9 [9.0]	29.5 [8.6]	27.4 [8.0]	
	Power	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
100 [37.8]	Total BTUH [kW]	38.1 [11.2]	37.5 [11.0]	36.4 [10.7]	35.2 [10.3]	34.6 [10.1]	33.6 [9.9]	32.2 [9.4]	31.6 [9.3]	30.8 [9.0]	
	Sens BTUH [kW]	22.3 [6.5]	21.3 [6.3]	19.9 [5.8]	26.7 [7.8]	25.6 [7.5]	23.8 [7.0]	30.1 [8.8]	28.7 [8.4]	26.7 [7.8]	
	Power	2.7	2.7	2.6	2.7	2.7	2.6	2.7	2.6	2.6	
105 [40.6]	Total BTUH [kW]	36.8 [10.8]	36.1 [10.6]	35.1 [10.3]	33.8 [9.9]	33.2 [9.7]	32.3 [9.5]	30.8 [9.0]	30.3 [8.9]	29.5 [8.6]	
	Sens BTUH [kW]	21.5 [6.3]	20.6 [6.0]	19.1 [5.6]	25.9 [7.6]	24.8 [7.3]	23.0 [6.7]	29.2 [8.6]	27.9 [8.2]	26.0 [7.6]	
	Power	2.9	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	
110 [43.3]	Total BTUH [kW]	35.4 [10.4]	34.7 [10.2]	33.8 [9.9]	32.4 [9.5]	31.9 [9.3]	31.0 [9.1]	29.4 [8.6]	28.9 [8.5]	28.1 [8.2]	
	Sens BTUH [kW]	20.7 [6.1]	19.8 [5.8]	18.4 [5.4]	25.1 [7.4]	24.0 [7.0]	22.3 [6.5]	28.4 [8.3]	27.1 [8.0]	25.2 [7.4]	
	Power	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	2.9	
115 [46.1]	Total BTUH [kW]	34.0 [10.0]	33.4 [9.8]	32.4 [9.5]	31.0 [9.1]	30.5 [8.9]	29.6 [8.7]	28.0 [8.2]	27.5 [8.1]	26.8 [7.8]	
	Sens BTUH [kW]	19.8 [5.8]	18.9 [5.5]	17.6 [5.2]	24.2 [7.1]	23.1 [6.8]	21.5 [6.3]	27.5 [8.1]	26.3 [7.7]	24.5 [7.2]	
	Power	3.2	3.2	3.2	3.2	3.2	3.1	3.2	3.2	3.1	
120 [48.9]	Total BTUH [kW]	32.5 [9.5]	32.0 [9.4]	31.1 [9.1]	29.6 [8.7]	29.1 [8.5]	28.3 [8.3]	26.6 [7.8]	26.1 [7.7]	25.4 [7.4]	
	Sens BTUH [kW]	18.9 [5.6]	18.1 [5.3]	16.8 [4.9]	23.3 [6.8]	22.3 [6.5]	20.7 [6.1]	26.6 [7.8]	25.5 [7.5]	23.7 [6.9]	
	Power	3.4	3.4	3.4	3.4	3.4	3.3	3.4	3.4	3.3	
125 [51.7]	Total BTUH [kW]	31.1 [9.1]	30.5 [9.0]	29.7 [8.7]	28.2 [8.3]	27.7 [8.1]	26.9 [7.9]	25.2 [7.4]	24.7 [7.2]	24.1 [7.0]	
	Sens BTUH [kW]	18.0 [5.3]	17.2 [5.1]	16.0 [4.7]	22.4 [6.6]	21.4 [6.3]	19.9 [5.8]	25.2 [7.4]	24.6 [7.2]	22.9 [6.7]	
	Power	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.5	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA15042A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]	1430 [675]	1300 [614]	1100 [519]
DR ①			0.17	0.16	0.13	0.17	0.16	0.13	0.17	0.16	0.13
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	50.1 [14.7] 28.6 [8.4] 2.4	49.2 [14.4] 27.3 [8.0] 2.3	47.8 [14.0] 25.3 [7.4] 2.3	47.2 [13.8] 33.9 [9.9] 2.4	46.4 [13.6] 32.4 [9.5] 2.3	45.1 [13.2] 30.0 [8.8] 2.3	44.7 [13.1] 38.8 [11.4] 2.3	43.9 [12.9] 37.1 [10.9] 2.3	42.7 [12.5] 34.4 [10.1] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	48.8 [14.3] 27.9 [8.2] 2.5	47.9 [14.0] 26.7 [7.8] 2.5	46.6 [13.6] 24.8 [7.3] 2.5	45.9 [13.5] 33.2 [9.7] 2.5	45.1 [13.2] 31.8 [9.3] 2.5	43.8 [12.8] 29.5 [8.6] 2.4	43.4 [12.7] 38.1 [11.2] 2.5	42.6 [12.5] 36.4 [10.7] 2.5	41.5 [12.1] 33.8 [9.9] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	47.4 [13.9] 27.2 [8.0] 2.7	46.6 [13.7] 26.0 [7.6] 2.6	45.3 [13.3] 24.2 [7.1] 2.6	44.6 [13.1] 32.6 [9.5] 2.6	43.8 [12.8] 31.1 [9.1] 2.6	42.6 [12.5] 28.9 [8.5] 2.6	42.1 [12.3] 37.5 [11.0] 2.6	41.3 [12.1] 35.8 [10.5] 2.6	40.2 [11.8] 33.2 [9.7] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	46.1 [13.5] 26.5 [7.8] 2.8	45.3 [13.3] 25.3 [7.4] 2.8	44.0 [12.9] 23.5 [6.9] 2.8	43.2 [12.7] 31.8 [9.3] 2.8	42.5 [12.4] 30.4 [8.9] 2.8	41.3 [12.1] 28.2 [8.3] 2.7	40.7 [11.9] 36.8 [10.8] 2.8	40.0 [11.7] 35.1 [10.3] 2.8	38.9 [11.4] 32.6 [9.6] 2.7
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	44.7 [13.1] 25.8 [7.6] 3.0	43.9 [12.9] 24.6 [7.2] 3.0	42.7 [12.5] 22.9 [6.7] 2.9	41.8 [12.3] 31.1 [9.1] 3.0	41.1 [12.0] 29.7 [8.7] 3.0	39.9 [11.7] 27.6 [8.1] 2.9	39.3 [11.5] 36.0 [10.5] 3.0	38.6 [11.3] 34.4 [10.1] 2.9	37.5 [11.0] 31.9 [9.4] 2.9
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	43.3 [12.7] 25.0 [7.3] 3.2	42.5 [12.4] 23.9 [7.0] 3.2	41.3 [12.1] 22.1 [6.5] 3.1	40.4 [11.8] 30.3 [8.9] 3.2	39.7 [11.6] 28.9 [8.5] 3.1	38.6 [11.3] 26.9 [7.9] 3.1	37.9 [11.1] 35.2 [10.3] 3.2	37.2 [10.9] 33.6 [9.9] 3.1	36.2 [10.6] 31.2 [9.1] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	41.8 [12.2] 24.1 [7.1] 3.4	41.0 [12.0] 23.1 [6.8] 3.4	39.9 [11.7] 21.4 [6.3] 3.3	38.9 [11.4] 29.4 [8.6] 3.4	38.2 [11.2] 28.1 [8.2] 3.3	37.2 [10.9] 26.1 [7.7] 3.3	36.4 [10.7] 34.4 [10.1] 3.4	35.8 [10.5] 32.8 [9.6] 3.3	34.8 [10.2] 30.5 [8.9] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	40.3 [11.8] 23.3 [6.8] 3.6	39.6 [11.6] 22.2 [6.5] 3.6	38.5 [11.3] 20.6 [6.0] 3.5	37.4 [11.0] 28.6 [8.4] 3.6	36.8 [10.8] 27.3 [8.0] 3.5	35.7 [10.5] 25.3 [7.4] 3.5	34.9 [10.2] 33.5 [9.8] 3.6	34.3 [10.1] 32.0 [9.4] 3.5	33.3 [9.8] 29.7 [8.7] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	38.7 [11.4] 22.3 [6.5] 3.8	38.0 [11.1] 21.4 [6.3] 3.8	37.0 [10.8] 19.8 [5.8] 3.7	35.9 [10.5] 27.7 [8.1] 3.8	35.3 [10.3] 26.4 [7.7] 3.8	34.3 [10.0] 24.5 [7.2] 3.7	33.4 [9.8] 32.6 [9.5] 3.8	32.8 [9.6] 31.1 [9.1] 3.7	31.9 [9.3] 28.9 [8.5] 3.7
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	37.2 [10.9] 21.4 [6.3] 4.0	36.5 [10.7] 20.4 [6.0] 4.0	35.5 [10.4] 19.0 [5.6] 3.9	34.3 [10.1] 26.7 [7.8] 4.0	33.7 [9.9] 25.5 [7.5] 4.0	32.8 [9.6] 23.7 [6.9] 3.9	31.8 [9.3] 31.6 [9.3] 4.0	31.2 [9.2] 30.2 [8.9] 4.0	30.4 [8.9] 28.0 [8.2] 3.9
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	35.6 [10.4] 20.4 [6.0] 4.3	34.9 [10.2] 19.5 [5.7] 4.2	33.9 [9.9] 18.1 [5.3] 4.2	32.7 [9.6] 25.7 [7.5] 4.3	32.1 [9.4] 24.6 [7.2] 4.2	31.2 [9.2] 22.8 [6.7] 4.2	30.2 [8.8] 30.2 [8.8] 4.2	29.7 [8.7] 29.3 [8.6] 4.2	28.8 [8.4] 27.2 [8.0] 4.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



GROSS SYSTEMS PERFORMANCE DATA—RACA15048A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]	1700 [802]	1550 [732]	1320 [623]
DR ①			0.19	0.18	0.15	0.19	0.18	0.15	0.19	0.18	0.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	58.3 [17.1]	57.3 [16.8]	55.8 [16.3]	54.6 [16.0]	53.7 [15.7]	52.2 [15.3]	51.6 [15.1]	50.7 [14.9]	49.3 [14.5]
		Sens BTUH [kW]	33.2 [9.7]	31.8 [9.3]	29.6 [8.7]	39.2 [11.5]	37.5 [11.0]	34.9 [10.2]	44.7 [13.1]	42.8 [12.5]	39.8 [11.7]
		Power	2.7	2.6	2.6	2.7	2.6	2.6	2.6	2.6	2.6
	80 [26.7]	Total BTUH [kW]	56.8 [16.7]	55.8 [16.4]	54.3 [15.9]	53.1 [15.6]	52.2 [15.3]	50.8 [14.9]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]
		Sens BTUH [kW]	32.5 [9.5]	31.1 [9.1]	28.9 [8.5]	38.5 [11.3]	36.8 [10.8]	34.3 [10.0]	44.0 [12.9]	42.1 [12.3]	39.2 [11.5]
		Power	2.8	2.8	2.8	2.8	2.8	2.7	2.8	2.8	2.7
	85 [29.4]	Total BTUH [kW]	55.3 [16.2]	54.3 [15.9]	52.8 [15.5]	51.5 [15.1]	50.6 [14.8]	49.3 [14.4]	48.5 [14.2]	47.7 [14.0]	46.4 [13.6]
		Sens BTUH [kW]	31.7 [9.3]	30.3 [8.9]	28.2 [8.3]	37.7 [11.0]	36.0 [10.6]	33.6 [9.8]	43.2 [12.7]	41.3 [12.1]	38.4 [11.3]
		Power	3.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
	90 [32.2]	Total BTUH [kW]	53.6 [15.7]	52.7 [15.4]	51.3 [15.0]	49.9 [14.6]	49.0 [14.4]	47.7 [14.0]	46.9 [13.7]	46.1 [13.5]	44.8 [13.1]
Sens BTUH [kW]		30.8 [9.0]	29.5 [8.6]	27.4 [8.0]	36.8 [10.8]	35.2 [10.3]	32.8 [9.6]	42.3 [12.4]	40.5 [11.9]	37.7 [11.0]	
Power		3.1	3.1	3.1	3.1	3.1	3.0	3.1	3.1	3.0	
95 [35]	Total BTUH [kW]	51.9 [15.2]	51.0 [14.9]	49.6 [14.5]	48.2 [14.1]	47.3 [13.9]	46.1 [13.5]	45.2 [13.2]	44.4 [13.0]	43.2 [12.7]	
	Sens BTUH [kW]	29.9 [8.8]	28.6 [8.4]	26.6 [7.8]	35.9 [10.5]	34.3 [10.1]	32.0 [9.4]	41.4 [12.1]	39.6 [11.6]	36.8 [10.8]	
	Power	3.3	3.3	3.2	3.3	3.3	3.2	3.3	3.3	3.2	
100 [37.8]	Total BTUH [kW]	50.1 [14.7]	49.2 [14.4]	47.9 [14.0]	46.4 [13.6]	45.6 [13.4]	44.3 [13.0]	43.4 [12.7]	42.6 [12.5]	41.5 [12.2]	
	Sens BTUH [kW]	28.9 [8.5]	27.6 [8.1]	25.7 [7.5]	34.9 [10.2]	33.4 [9.8]	31.1 [9.1]	40.4 [11.8]	38.6 [11.3]	36.0 [10.5]	
	Power	3.5	3.5	3.4	3.5	3.5	3.4	3.5	3.4	3.4	
105 [40.6]	Total BTUH [kW]	48.2 [14.1]	47.4 [13.9]	46.1 [13.5]	44.5 [13.0]	43.7 [12.8]	42.6 [12.5]	41.5 [12.2]	40.8 [12.0]	39.7 [11.6]	
	Sens BTUH [kW]	27.8 [8.2]	26.6 [7.8]	24.8 [7.3]	33.8 [9.9]	32.4 [9.5]	30.1 [8.8]	39.3 [11.5]	37.6 [11.0]	35.0 [10.3]	
	Power	3.7	3.7	3.6	3.7	3.7	3.6	3.7	3.7	3.6	
110 [43.3]	Total BTUH [kW]	46.3 [13.6]	45.5 [13.3]	44.3 [13.0]	42.6 [12.5]	41.9 [12.3]	40.7 [11.9]	39.6 [11.6]	38.9 [11.4]	37.9 [11.1]	
	Sens BTUH [kW]	26.7 [7.8]	25.6 [7.5]	23.8 [7.0]	32.7 [9.6]	31.3 [9.2]	29.1 [8.5]	38.2 [11.2]	36.6 [10.7]	34.0 [10.0]	
	Power	3.9	3.9	3.9	3.9	3.9	3.8	3.9	3.9	3.8	
115 [46.1]	Total BTUH [kW]	44.3 [13.0]	43.5 [12.8]	42.4 [12.4]	40.6 [11.9]	39.9 [11.7]	38.8 [11.4]	37.6 [11.0]	36.9 [10.8]	35.9 [10.5]	
	Sens BTUH [kW]	25.5 [7.5]	24.4 [7.2]	22.7 [6.7]	31.6 [9.2]	30.2 [8.8]	28.1 [8.2]	37.1 [10.9]	35.5 [10.4]	33.0 [9.7]	
	Power	4.2	4.2	4.1	4.2	4.1	4.1	4.2	4.1	4.1	
120 [48.9]	Total BTUH [kW]	42.2 [12.4]	41.5 [12.2]	40.4 [11.8]	38.5 [11.3]	37.9 [11.1]	36.8 [10.8]	35.5 [10.4]	34.9 [10.2]	34.0 [10.0]	
	Sens BTUH [kW]	24.3 [7.1]	23.3 [6.8]	21.7 [6.3]	30.3 [8.9]	29.0 [8.5]	27.0 [7.9]	35.5 [10.4]	34.3 [10.0]	31.9 [9.3]	
	Power	4.4	4.4	4.3	4.4	4.4	4.3	4.4	4.4	4.3	
125 [51.7]	Total BTUH [kW]	40.1 [11.8]	39.4 [11.5]	38.3 [11.2]	36.4 [10.7]	35.7 [10.5]	34.8 [10.2]	33.4 [9.8]	32.8 [9.6]	31.9 [9.4]	
	Sens BTUH [kW]	23.0 [6.7]	22.0 [6.5]	20.5 [6.0]	29.0 [8.5]	27.8 [8.1]	25.9 [7.6]	33.4 [9.8]	32.8 [9.6]	30.8 [9.0]	
	Power	4.7	4.7	4.6	4.7	4.6	4.6	4.7	4.6	4.6	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RACA15060A

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			2040 [963]	1850 [873]	1570 [741]	2040 [963]	1850 [873]	1570 [741]	2040 [963]	1850 [873]	1570 [741]
DR ①			0.15	0.14	0.11	0.15	0.14	0.11	0.15	0.14	0.11
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	73.0 [21.4] 42.4 [12.4] 3.6	71.7 [21.0] 40.5 [11.9] 3.6	69.7 [20.4] 37.6 [11.0] 3.5	69.2 [20.3] 50.0 [14.6] 3.6	67.9 [19.9] 47.7 [14.0] 3.5	66.0 [19.3] 44.3 [13.0] 3.5	65.8 [19.3] 56.9 [16.7] 3.5	64.6 [18.9] 54.3 [15.9] 3.5	62.8 [18.4] 50.5 [14.8] 3.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	70.9 [20.8] 41.3 [12.1] 3.8	69.6 [20.4] 39.4 [11.6] 3.7	67.7 [19.8] 36.6 [10.7] 3.7	67.1 [19.6] 48.8 [14.3] 3.7	65.8 [19.3] 46.6 [13.7] 3.7	64.0 [18.8] 43.3 [12.7] 3.6	63.7 [18.7] 55.8 [16.4] 3.7	62.5 [18.3] 53.2 [15.6] 3.7	60.8 [17.8] 49.5 [14.5] 3.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	68.8 [20.2] 40.1 [11.8] 4.0	67.6 [19.8] 38.3 [11.2] 3.9	65.7 [19.3] 35.6 [10.4] 3.9	64.9 [19.0] 47.7 [14.0] 3.9	63.7 [18.7] 45.5 [13.3] 3.9	62.0 [18.2] 42.3 [12.4] 3.8	61.5 [18.0] 54.6 [16.0] 3.9	60.4 [17.7] 52.1 [15.3] 3.8	58.8 [17.2] 48.5 [14.2] 3.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	66.7 [19.5] 38.9 [11.4] 4.2	65.4 [19.2] 37.2 [10.9] 4.1	63.6 [18.6] 34.5 [10.1] 4.1	62.8 [18.4] 46.5 [13.6] 4.1	61.6 [18.1] 44.3 [13.0] 4.1	59.9 [17.6] 41.2 [12.1] 4.0	59.4 [17.4] 53.4 [15.7] 4.1	58.3 [17.1] 51.0 [14.9] 4.0	56.7 [16.6] 47.4 [13.9] 4.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	64.5 [18.9] 37.7 [11.0] 4.4	63.3 [18.5] 36.0 [10.5] 4.3	61.5 [18.0] 33.4 [9.8] 4.3	60.6 [17.7] 45.2 [13.3] 4.3	59.5 [17.4] 43.2 [12.6] 4.3	57.8 [16.9] 40.1 [11.8] 4.2	57.2 [16.8] 52.2 [15.3] 4.3	56.1 [16.5] 49.8 [14.6] 4.3	54.6 [16.0] 46.3 [13.6] 4.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	62.2 [18.2] 36.4 [10.7] 4.6	61.1 [17.9] 34.7 [10.2] 4.6	59.4 [17.4] 32.3 [9.5] 4.5	58.3 [17.1] 43.9 [12.9] 4.6	57.3 [16.8] 41.9 [12.3] 4.5	55.7 [16.3] 39.0 [11.4] 4.5	55.0 [16.1] 50.9 [14.9] 4.5	54.0 [15.8] 48.6 [14.2] 4.5	52.5 [15.4] 45.1 [13.2] 4.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	60.0 [17.6] 35.1 [10.3] 4.9	58.9 [17.3] 33.5 [9.8] 4.8	57.3 [16.8] 31.1 [9.1] 4.8	56.1 [16.4] 42.6 [12.5] 4.8	55.1 [16.1] 40.7 [11.9] 4.8	53.5 [15.7] 37.8 [11.1] 4.7	52.7 [15.4] 49.6 [14.5] 4.8	51.8 [15.2] 47.3 [13.9] 4.8	50.3 [14.7] 44.0 [12.9] 4.7
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	57.7 [16.9] 33.7 [9.9] 5.2	56.6 [16.6] 32.2 [9.4] 5.1	55.1 [16.1] 29.9 [8.8] 5.0	53.8 [15.8] 41.2 [12.1] 5.1	52.8 [15.5] 39.3 [11.5] 5.1	51.4 [15.1] 36.6 [10.7] 5.0	50.4 [14.8] 48.2 [14.1] 5.1	49.5 [14.5] 46.0 [13.5] 5.0	48.1 [14.1] 42.7 [12.5] 5.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	55.4 [16.2] 32.3 [9.5] 5.4	54.4 [15.9] 30.8 [9.0] 5.4	52.9 [15.5] 28.6 [8.4] 5.3	51.5 [15.1] 39.8 [11.7] 5.4	50.5 [14.8] 38.0 [11.1] 5.4	49.2 [14.4] 35.3 [10.3] 5.3	48.1 [14.1] 46.8 [13.7] 5.4	47.2 [13.8] 44.6 [13.1] 5.3	45.9 [13.5] 41.5 [12.2] 5.2
	120 [48.9]	Total BTUH [kW] Sens BTUH [kW] Power	53.0 [15.5] 30.8 [9.0] 5.8	52.1 [15.3] 29.4 [8.6] 5.7	50.6 [14.8] 27.3 [8.0] 5.6	49.1 [14.4] 38.4 [11.2] 5.7	48.2 [14.1] 36.6 [10.7] 5.7	46.9 [13.7] 34.0 [10.0] 5.6	45.8 [13.4] 45.3 [13.3] 5.7	44.9 [13.2] 43.2 [12.7] 5.6	43.7 [12.8] 40.2 [11.8] 5.5
	125 [51.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.7 [14.8] 29.3 [8.6] 6.1	49.7 [14.6] 28.0 [8.2] 6.0	48.4 [14.2] 26.0 [7.6] 6.0	46.8 [13.7] 36.9 [10.8] 6.0	45.9 [13.5] 35.2 [10.3] 6.0	44.6 [13.1] 32.7 [9.6] 5.9	43.4 [12.7] 43.4 [12.7] 6.0	42.6 [12.5] 41.8 [12.3] 6.0	41.4 [12.1] 38.9 [11.4] 5.9

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



Air

Indoor Airflow Performance

RACA13/14 Series

INDOOR AIRFLOW PERFORMANCE RACA13/14 - 230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)											
	Cool	Heat				0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]		
2.0 [7.03]	High	High	700 CFM / 950 CFM	9x7 Blower 1/4 HP [186] 2 Speed (PSC Motor)	Low	CFM	822 [388]	789 [372]	750 [354]	696 [328]	624 [294]	496 [234]	402 [190]				
						RPM	917	954	994	1031	1051	1075	1105				
						Watts	226	216	203	188	175	150	136				
						CFM	992 [468]	928 [438]	873 [412]	810 [382]	741 [350]	659 [311]	490 [231]				
						RPM	1055	1068	1080	1096	1106	1119	1136				
2.5 [8.79]	Low	Low	850 CFM / 1150 CFM	10x9 Blower 1/2 HP [372] 3 Speed (PSC Motor)	High	Watts	271	256	245	227	214	199	175				
						CFM	1093 [516]	1062 [501]	1001 [472]	930 [439]	815 [385]	728 [344]	663 [313]	571 [269]			
						RPM	900	935	969	999	1030	1053	1064	1082			
						Watts	375	358	335	313	283	264	249	229			
						CFM	1239 [585]	1184 [559]	1114 [526]	1043 [492]	959 [453]	827 [390]	744 [351]	657 [310]			
3.0 [10.55]	Low	Low	1000 CFM / 1400 CFM	12x9T Blower 1/2 HP [372] 2 Speed (PSC Motor)	Low	RPM	961	983	1006	1030	1052	1074	1084	1097			
						Watts	429	409	384	360	334	303	287	266			
						CFM	1362 [643]	1292 [610]	1213 [572]	1133 [535]	1027 [485]	872 [412]	800 [378]	700 [330]			
						RPM	1049	1061	1073	1085	1097	1109	1116	1124			
						Watts	500	472	454	427	405	371	360	339			
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1310 [618]	1246 [588]	1186 [560]	1128 [532]	1038 [490]	955 [451]	847 [400]	738 [348]			
						RPM	834	867	895	918	949	971	989	1019			
						Watts	460	447	435	424	407	396	380	362			
						CFM	1644 [776]	1568 [740]	1488 [702]	1421 [671]	1330 [628]	1248 [589]	1133 [535]	1003 [473]			
						RPM	981	996	1009	1421	1330	1248	1058	1072			
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 2 Medium	Watts	664	641	620	1421	1330	1248	545	526			
						CFM	1336 [631]	1312 [619]	1295 [611]	1241 [586]	1200 [566]	1161 [548]	1119 [528]	1072 [506]	1001 [472]	939 [443]	
						RPM	827	856	874	913	949	983	1013	1048	1092	1127	
						Watts	298	308	313	325	341	352	361	374	387	402	
						CFM	1336 [631]	1312 [619]	1295 [611]	1241 [586]	1200 [566]	1161 [548]	1119 [528]	1072 [506]	1001 [472]	939 [443]	
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	RPM	827	856	874	913	949	983	1013	1048	1092	1127	
						Watts	298	308	313	325	341	352	361	374	387	402	
						CFM	1591 [751]	1563 [738]	1558 [735]	1519 [717]	1490 [703]	1458 [688]	1410 [665]	1363 [643]	1277 [603]	1122 [530]	
						RPM	949	981	999	1027	1051	1086	1109	1129	1140	1158	
						Watts	476	490	501	515	527	542	546	543	522	478	

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 2 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

. [] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE RACA13/14 - 230 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)									
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM 1467 [692]	1448 [683]	1404 [663]	1373 [648]	1339 [632]	1306 [616]	1250 [590]	1210 [571]	1164 [549]	1087 [513]
						RPM 826	855	884	910	939	969	1003	1030	1067	1108
						Watts 328	344	348	363	379	387	398	408	418	434
					Tap 2 Medium	CFM 1634 [771]	1595 [753]	1547 [730]	1530 [722]	1487 [702]	1462 [690]	1438 [679]	1378 [650]	1352 [638]	1298 [613]
						RPM 894	923	950	981	1000	1030	1051	1079	1106	1126
						Watts 432	446	451	468	479	490	508	510	520	520
5.0 [17.59]	Tap 3	Tap 3	1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 3 Speed (Constant Torque)	Tap 3 High	CFM 1941 [916]	1915 [904]	1878 [886]	1814 [856]	1773 [837]	1709 [807]	1655 [781]	1570 [741]	1486 [702]	1374 [648]
						RPM 1028	1047	1068	1091	1104	1113	1124	1136	1142	1147
						Watts 708	725	729	727	717	696	673	647	618	571
					Tap 1 Low	CFM 1768 [834]	1730 [816]	1693 [799]	1626 [767]	1599 [755]	1558 [735]	1522 [718]	1503 [709]	1444 [681]	1399 [660]
						RPM 938	959	983	1011	1025	1052	1089	1090	1117	1134
						Watts 520	533	541	560	563	578	599	599	605	615
					Tap 2 Medium	CFM 1926 [909]	1890 [892]	1864 [880]	1822 [860]	1794 [847]	1758 [830]	1710 [807]	1670 [788]	1579 [745]	1493 [705]
						RPM 999	1014	1040	1061	1079	1096	1119	1128	1138	1144
						Watts 654	660	674	688	699	708	714	705	683	661
					Tap 3 High	CFM 2096 [989]	2057 [971]	2003 [945]	1951 [921]	1890 [892]	1819 [858]	1756 [829]	1686 [796]	1610 [760]	1498 [707]
						RPM 1069	1092	1106	1116	1121	1129	1138	1140	1148	1154
						Watts 829	846	840	822	807	782	768	730	708	679

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 2 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
				.15 [.037]	.17 [.042]

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE RACA13/14 - 208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)											
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]		
2.0 [7.03]	High	High	700 CFM / 950 CFM	9x7 Blower 1/4 HP [186] 2 Speed (PSC Motor)	Low	CFM	706 [333]	685 [323]	661 [312]	614 [290]	523 [247]	437 [206]	334 [158]				
						RPM	844	886	943	989	1036	1067	1095				
						Watts	202	193	182	169	151	135	120				
					High	CFM	925 [437]	874 [412]	813 [384]	763 [360]	681 [321]	534 [252]	441 [208]				
						RPM	1004	1027	1058	1070	1091	1116	1128				
2.5 [8.79]	Low	Low	850 CFM / 1150 CFM	10x9 Blower 1/2 HP [372] 3 Speed (PSC Motor)	Low	Watts	253	238	220	210	192	167	155				
						CFM	967 [456]	947 [447]	892 [421]	813 [384]	740 [349]	681 [321]	613 [289]	504 [238]			
						RPM	819	876	916	966	995	1018	1040	1066			
					Med	Watts	339	322	302	279	261	246	230	205			
						CFM	1119 [528]	1081 [510]	1029 [486]	968 [457]	851 [402]	774 [365]	699 [330]	613 [289]			
3.0 [10.55]	Low	Low	1000 CFM / 1400 CFM	12x9T Blower 1/2 HP [372] 2 Speed (PSC Motor)	High	RPM	891	930	965	995	1026	1047	1059	1078			
						Watts	391	375	354	330	297	278	263	241			
						CFM	1311 [619]	1249 [589]	1168 [551]	1089 [514]	985 [465]	861 [406]	779 [368]	699 [330]			
					Low	RPM	1010	1031	1046	1066	1080	1095	1106	1113			
						Watts	458	437	409	387	360	332	314	300			
3.5 [12.31]	Low	Low	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Low	CFM	1163 [549]	1115 [526]	1075 [507]	1012 [478]	926 [437]	841 [397]	753 [355]	647 [305]			
						RPM	771	804	844	870	910	932	968	992			
						Watts	392	387	380	367	356	345	330	316			
					High	CFM	1543 [728]	1484 [700]	1422 [671]	1345 [635]	1251 [590]	1177 [555]	1071 [505]	939 [443]			
						RPM	939	957	975	1345	1251	1177	1037	1051			
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	Watts	586	572	555	1345	1251	1177	481	459			
						CFM	1346 [635]	1304 [615]	1264 [597]	1232 [581]	1185 [559]	1139 [538]	1092 [515]	1048 [495]	993 [469]	908 [429]	
						RPM	819	850	883	906	944	972	1014	1047	1083	1122	
					Tap 2 Medium	Watts	291	302	310	319	333	338	353	362	374	389	
						CFM	1346 [635]	1304 [615]	1264 [597]	1232 [581]	1185 [559]	1139 [538]	1092 [515]	1048 [495]	993 [469]	908 [429]	
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	RPM	819	850	883	906	944	972	1014	1047	1083	1122	
						Watts	291	302	310	319	333	338	353	362	374	389	
						CFM	1596 [753]	1547 [730]	1520 [717]	1499 [707]	1471 [694]	1421 [671]	1383 [653]	1332 [629]	1262 [596]	1085 [512]	
					Tap 3 High	RPM	940	973	988	1020	1038	1068	1102	1122	1136	1154	
						Watts	461	475	484	497	503	516	527	531	505	458	

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 1 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE RACA13/14 - 208 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)									
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM 1474 [696]	1431 [675]	1394 [658]	1355 [639]	1327 [626]	1284 [606]	1243 [587]	1198 [565]	1134 [535]	1057 [499]
						RPM 819	852	878	907	936	961	993	1024	1064	1101
						Watts 324	334	340	355	366	374	382	396	410	422
					Tap 2 Medium	CFM 1617 [763]	1585 [748]	1547 [730]	1512 [714]	1486 [701]	1449 [684]	1430 [675]	1355 [639]	1337 [631]	1280 [604]
						RPM 891	917	940	965	992	1015	1046	1080	1098	1123
						Watts 422	433	440	451	463	475	482	496	506	507
5.0 [17.59]	Tap 3	Tap 3	1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 3 Speed (Constant Torque)	Tap 3 High	CFM 1906 [900]	1876 [885]	1839 [868]	1807 [853]	1756 [829]	1697 [801]	1642 [775]	1555 [734]	1482 [699]	1372 [648]
						RPM 1021	1043	1064	1079	1097	1110	1123	1128	1140	1145
						Watts 679	699	694	707	698	686	671	635	610	566
					Tap 1 Low	CFM 1738 [820]	1680 [793]	1663 [785]	1626 [767]	1603 [757]	1554 [733]	1503 [709]	1445 [682]	1432 [676]	1386 [654]
						RPM 933	969	979	1001	1021	1045	1066	1100	1104	1125
						Watts 505	526	529	541	545	562	567	585	586	593
					Tap 2 Medium	CFM 1884 [889]	1882 [888]	1841 [869]	1801 [850]	1760 [831]	1680 [793]	1651 [779]	1584 [748]	1508 [712]	1428 [674]
						RPM 999	1014	1048	1064	1072	1105	1121	1131	1142	1147
						Watts 636	646	661	672	675	688	686	678	662	635
					Tap 3 High	CFM 2081 [982]	1969 [929]	2001 [944]	1960 [925]	1896 [895]	1818 [858]	1764 [833]	1664 [785]	1593 [752]	1499 [707]
						RPM 1050	1102	1095	1104	1115	1126	1130	1140	1143	1147
						Watts 790	815	819	813	793	772	749	725	699	663

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 2 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
				.15 [.037]	.17 [.042]

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE RACA15 - 460 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)										
	Cool	Heat				0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	
3.0 [10.55]	Tap 3	Tap 3	1000 CFM / 1400 CFM	12x9T Blower 1/2 HP [372] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1108 [523]	1081 [510]	1040 [491]	951 [449]	916 [432]	857 [404]	776 [366]	722 [341]		
						RPM	713	752	796	845	873	920	966	1001		
						Watts	188	199	213	222	229	241	252	261		
					Tap 2 Medium	CFM	1163 [549]	1144 [540]	1086 [513]	1073 [506]	987 [466]	927 [437]	870 [411]	819 [387]		
						RPM	749	761	810	836	887	920	964	1005		
						Watts	202	205	217	230	248	248	266	271		
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	CFM	1435 [677]	1405 [663]	1378 [650]	1349 [637]	1309 [618]	1266 [597]	1233 [582]	1193 [563]	1134 [535]	1066 [503]
						RPM	844	867	892	927	961	991	1022	1052	1101	1130
						Watts	337	340	358	368	390	389	409	411	438	446
					Tap 1 Low	CFM	1362 [643]	1327 [626]	1294 [611]	1267 [598]	1207 [570]	1151 [543]	1131 [534]	1085 [512]	1022 [482]	956 [451]
						RPM	794	833	872	897	948	976	1005	1038	1078	1112
						Watts	287	295	317	317	331	351	361	365	370	399
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 2 Medium	CFM	1362 [643]	1327 [626]	1294 [611]	1267 [598]	1207 [570]	1151 [543]	1131 [534]	1085 [512]	1022 [482]	956 [451]
						RPM	794	833	872	897	948	976	1005	1038	1078	1112
						Watts	287	295	317	317	331	351	361	365	370	399
					Tap 3 High	CFM	1643 [775]	1609 [759]	1580 [746]	1560 [736]	1511 [713]	1494 [705]	1443 [681]	1404 [663]	1335 [630]	1244 [587]
						RPM	927	954	986	1001	1035	1052	1083	1111	1122	1133
						Watts	461	475	490	506	518	528	535	548	530	502
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1467 [692]	1448 [683]	1404 [663]	1373 [648]	1339 [632]	1306 [616]	1250 [590]	1210 [571]	1164 [549]	1087 [513]
						RPM	826	855	884	910	939	969	1003	1030	1067	1108
						Watts	328	344	348	363	379	387	398	408	418	434
					Tap 2 Medium	CFM	1634 [771]	1595 [753]	1547 [730]	1530 [722]	1487 [702]	1462 [690]	1438 [679]	1378 [650]	1352 [638]	1298 [613]
						RPM	894	923	950	981	1000	1030	1051	1079	1106	1126
						Watts	432	446	451	468	479	490	508	510	520	520
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	CFM	1941 [916]	1915 [904]	1878 [886]	1814 [856]	1773 [837]	1709 [807]	1655 [781]	1570 [741]	1488 [702]	1374 [648]
						RPM	1028	1047	1068	1091	1104	1113	1124	1136	1142	1147
						Watts	708	725	729	727	717	696	673	647	618	571

Notes: (1) Set 2 through 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 5 ton 1st Stage Cool to Tap 1 for AHRI rated performance.

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE RACA15 - 460 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)												
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]			
5.0 [17.59]	1st Stage Tap 2		1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 5 Speed (Constant Torque)	Tap 1 Heat / 1st Stg Cool Low Static	CFM	1289 [608]	1239 [585]	1189 [561]	1140 [538]	1101 [520]	1052 [496]	969 [457]	918 [433]	860 [406]	812 [383]		
						RPM	726	755	786	815	846	876	912	935	964	986		
						Watts	233	248	249	259	275	292	309	308	321	330		
					Tap 2 Heat / 1st Stg Cool High Static	CFM	1484 [700]	1440 [680]	1405 [663]	1360 [642]	1319 [622]	1280 [604]	1238 [584]	1186 [560]	1128 [532]	1047 [494]		
						RPM	812	841	863	889	918	938	965	994	1026	1066		
						Watts	330	338	355	354	379	381	395	408	423	419		
	2nd Stage Tap 4				Tap 3 Unused	CFM	1787 [843]	1746 [824]	1705 [805]	1680 [793]	1621 [765]	1607 [758]	1564 [738]	1530 [722]	1505 [710]	1424 [672]	1130	626
						RPM	950	970	1000	1012	1042	1055	1079	1108	1113	631	626	
						Watts	525	538	545	579	571	596	615	610	631	626	626	
					Tap 4 2nd stage Low Static Cool	CFM	1954 [922]	1927 [909]	1889 [892]	1843 [870]	1808 [853]	1738 [820]	1671 [789]	1620 [765]	1543 [728]	1433 [676]	1146	635
						RPM	1030	1042	1061	1082	1100	1121	1130	1133	1138	1146	635	635
						Watts	664	673	683	696	704	700	697	684	667	635	635	635
		Tap 5 2nd Stage High Static Cool	CFM	2095 [989]	2045 [965]	1983 [936]	1905 [899]	1840 [868]	1792 [846]	1712 [808]	1641 [774]	1558 [735]	1397 [659]	1148	633			
			RPM	1103	1114	1114	1123	1125	1130	1139	1140	1144	1148	633	633			
			Watts	829	841	832	803	785	770	749	710	685	633	633	633			

Notes: (1) Set 2 through 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 5 ton 1st Stage Cool to Tap 1 for AHRI rated performance.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
				.15 [.037]	.17 [.042]

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE RACA13/14 - 460 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)										
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]	
3.0 [10.55]	Low	Low	1000 CFM / 1400 CFM	12x9T Blower 1/2 HP [372] 2 Speed (PSC Motor)	Low	CFM	1358 [641]	1322 [624]	1266 [597]	1209 [571]	1120 [529]	1063 [502]	979 [979]	861 [406]	757 [357]	
						RPM	823	849	877	901	932	953	999	1029	1055	
						Watts	505	491	481	464	447	439	422	404	393	378
					High	CFM	1652 [780]	1596 [753]	1540 [727]	1481 [699]	1402 [662]	1320 [623]	1212 [572]	1079 [509]	1004 [474]	
						RPM	951	965	977	992	1007	1019	1036	1050	1063	1077
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	Watts	670	658	642	625	600	580	561	539	504	
						CFM	1362 [643]	1327 [626]	1294 [611]	1267 [598]	1207 [570]	1151 [543]	1085 [512]	1022 [482]	956 [451]	
						RPM	794	833	872	897	948	976	1005	1038	1078	1112
					Tap 2 Medium	Watts	287	295	317	317	331	351	361	365	370	399
						CFM	1362 [643]	1327 [626]	1294 [611]	1267 [598]	1207 [570]	1151 [543]	1085 [512]	1022 [482]	956 [451]	
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	RPM	794	833	872	897	948	976	1005	1038	1078	1112
						Watts	287	295	317	317	331	351	361	365	370	399
						CFM	1643 [775]	1609 [759]	1580 [746]	1560 [736]	1511 [713]	1494 [705]	1443 [681]	1404 [663]	1335 [630]	1244 [587]
					Tap 1 Low	RPM	927	954	986	1001	1035	1052	1083	1111	1122	1133
						Watts	461	475	490	506	518	528	535	548	530	502
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1467 [692]	1448 [683]	1404 [663]	1373 [648]	1339 [632]	1306 [616]	1250 [590]	1210 [571]	1164 [549]	1087 [513]
						RPM	826	855	884	910	939	969	1003	1030	1067	1108
						Watts	328	344	348	363	379	387	398	408	418	434
					Tap 2 Medium	CFM	1634 [771]	1595 [753]	1547 [730]	1530 [722]	1487 [702]	1462 [690]	1438 [679]	1378 [650]	1352 [638]	1298 [613]
						RPM	894	923	950	981	1000	1030	1051	1079	1106	1126
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	Watts	432	446	451	468	479	490	508	510	520	520
						CFM	1941 [916]	1915 [904]	1878 [886]	1814 [856]	1773 [837]	1709 [807]	1655 [781]	1570 [741]	1488 [702]	1374 [648]
						RPM	1028	1047	1068	1091	1104	1113	1124	1136	1142	1147
					Tap 3 High	Watts	708	725	729	727	717	696	673	647	618	571

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 2 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE RACA13/14 - 460 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)									
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]
5.0 [17.59]	Tap 3	Tap 3	1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 5 Speed (Constant Torque)	Tap 1 Low	CFM	1787 [843]	1746 [824]	1705 [805]	1680 [793]	1621 [765]	1607 [758]	1530 [722]	1505 [710]	1424 [672]
						RPM	950	970	1000	1012	1042	1055	1108	1113	1130
						Watts	525	538	545	579	571	596	610	631	626
					Tap 2 Medium	CFM	1954 [922]	1927 [909]	1889 [892]	1843 [870]	1808 [853]	1738 [820]	1671 [789]	1543 [728]	1433 [676]
						RPM	1030	1042	1061	1082	1100	1121	1130	1138	1146
						Watts	664	673	683	696	704	700	697	667	635
					Tap 3 High	CFM	2095 [989]	2045 [965]	1983 [936]	1905 [899]	1840 [868]	1792 [846]	1641 [774]	1558 [735]	1397 [659]
						RPM	1103	1114	1114	1123	1125	1130	1140	1144	1148
						Watts	829	841	832	803	785	770	710	685	633

Notes: (1) Set 3-1/2 and 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 13 SEER 5 ton Cool to Tap 2 for AHRI rated performance. (3) Set 14 SEER 5 ton Cool to Tap 1 for AHRI rated performance.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
					.15 [.037]
					.17 [.042]

[] Designates Metric Conversions



Air

Indoor Airflow Performance

RACA15 Series

INDOOR AIRFLOW PERFORMANCE RACA15 - 208/230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)											
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]		
2.0 [7.03]	Tap 3	Tap 3	700 CFM / 950 CFM	10X9 Blower 1/3 HP [249] 3 Speed (Constant Torque)	Tap 1 Low	CFM	917 [433]	865 [408]	826 [390]	771 [364]	730 [345]	677 [320]	628 [296]	596 [281]			
						RPM	772	810	860	905	945	985	1013	1052			
						Watts	142	149	159	164	175	177	180	189			
					Tap 2 Medium	CFM	931 [439]	880 [415]	854 [403]	795 [375]	743 [351]	694 [328]	655 [309]	608 [287]			
						RPM	789	1425	874	921	965	1002	1041	1070			
						Watts	155	159	170	176	185	188	196	200			
2.5 [8.79]	Tap 3	Tap 3	850 CFM / 1150 CFM	10X9 Blower 1/3 HP [249] 3 Speed (Constant Torque)	Tap 3 High	CFM	1005 [474]	956 [451]	916 [432]	878 [414]	808 [381]	778 [367]	734 [346]	698 [329]			
						RPM	822	872	907	954	998	1036	1070	1103			
						Watts	178	192	198	208	212	224	224	234			
					Tap 1 Low	CFM	917 [433]	865 [408]	826 [390]	771 [364]	730 [345]	677 [320]	628 [296]	596 [281]			
						RPM	772	810	860	905	945	985	1013	1052			
						Watts	142	149	159	164	175	177	180	189			
3.0 [10.55]	Tap 3	Tap 3	1000 CFM / 1400 CFM	12x9T Blower 1/2 HP [372] 3 Speed (Constant Torque)	Tap 2 Medium	CFM	1013 [478]	980 [463]	939 [443]	893 [421]	864 [408]	792 [374]	752 [355]	687 [324]			
						RPM	820	854	901	934	976	1022	1064	1097			
						Watts	171	177	187	190	202	207	217	222			
					Tap 3 High	CFM	1227 [579]	1180 [557]	1160 [547]	1123 [530]	1090 [514]	1054 [497]	1008 [476]	882 [416]			
						RPM	930	976	1006	1029	1065	1089	1124	1154			
						Watts	264	276	288	291	300	305	311	292			
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1108 [523]	1081 [510]	1040 [491]	951 [449]	916 [432]	857 [404]	776 [366]	722 [341]			
						RPM	713	752	796	845	873	920	966	1001			
						Watts	188	199	213	222	229	241	252	261			
					Tap 2 Medium	CFM	1169 [552]	1115 [526]	1086 [513]	1047 [494]	983 [464]	931 [439]	855 [404]	784 [370]			
						RPM	749	803	819	856	901	938	985	1029			
						Watts	217	231	233	246	259	266	277	289			
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 3 High	CFM	1434 [677]	1419 [670]	1387 [655]	1340 [632]	1310 [618]	1258 [594]	1198 [565]	1160 [547]	1085 [512]	930 [439]	
						RPM	866	882	920	944	981	1008	1051	1078	1106	1131	
						Watts	372	377	390	399	413	421	426	443	445	412	
					Tap 1 Low	CFM	1336 [631]	1312 [619]	1295 [611]	1241 [586]	1200 [566]	1161 [548]	1119 [528]	1072 [506]	1001 [472]	939 [443]	
						RPM	827	856	874	913	949	983	1013	1048	1092	1127	
						Watts	298	308	313	325	341	352	361	374	387	402	
3.5 [12.31]	Tap 3	Tap 3	1200 CFM / 1600 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 2 Medium	CFM	1336 [631]	1312 [619]	1295 [611]	1241 [586]	1200 [566]	1161 [548]	1119 [528]	1072 [506]	1001 [472]	939 [443]	
						RPM	827	856	874	913	949	983	1013	1048	1092	1127	
						Watts	298	308	313	325	341	352	361	374	387	402	
					Tap 3 High	CFM	1591 [751]	1563 [738]	1558 [735]	1519 [717]	1490 [703]	1458 [688]	1410 [665]	1363 [643]	1277 [603]	1122 [530]	
						RPM	949	981	999	1027	1051	1086	1109	1129	1140	1158	
						Watts	476	490	501	515	527	542	546	543	522	478	

Notes: (1) Set 2 through 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 5 ton 1st Stage Cool to Tap 1 for AHRI rated performance.

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE RACA15 - 208/230 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Manufacturer Recommended Cooling Airflow (Min/Max)	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed / Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)										
	Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]	
4.0 [14.07]	Tap 3	Tap 3	1350 CFM / 1850 CFM	12x9T Blower 3/4 HP [559] 3 Speed (Constant Torque)	Tap 1 Low	CFM	1467 [692]	1448 [683]	1404 [663]	1373 [648]	1339 [632]	1306 [616]	1250 [590]	1210 [571]	1164 [549]	1087 [513]
						RPM	826	855	884	910	939	969	1003	1030	1067	1108
						Watts	328	344	348	363	379	387	398	408	418	434
					Tap 2 Medium	CFM	1634 [771]	1595 [753]	1547 [730]	1530 [722]	1487 [702]	1462 [690]	1438 [679]	1378 [650]	1352 [638]	1298 [613]
						RPM	894	923	950	981	1000	1030	1051	1079	1106	1126
						Watts	432	446	451	468	479	490	508	510	520	520
5.0 [17.59]	Tap 2	Tap 1	1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 5 Speed (Constant Torque)	Tap 1 Heat / 1st Stg Cool Low Static	CFM	1233 [582]	1158 [547]	1136 [536]	1090 [514]	1039 [490]	969 [457]	902 [426]	847 [400]	791 [373]	752 [355]
						RPM	734	774	793	822	860	892	934	957	983	1011
						Watts	223	231	238	248	259	269	288	284	295	306
					Tap 2 Heat / 1st Stg Cool High Static	CFM	1433 [676]	1407 [664]	1354 [639]	1329 [627]	1270 [599]	1235 [583]	1195 [564]	1137 [537]	1083 [511]	1030 [486]
						RPM	821	843	868	888	929	944	975	1004	1040	1065
						Watts	319	331	342	346	365	368	381	391	406	412
5.0 [17.59]	Tap 4	Tap 1	1600 CFM / 2100 CFM	12x9R Blower 1 HP [746] 5 Speed (Constant Torque)	Tap 3 Unused	CFM	1768 [834]	1730 [816]	1693 [799]	1626 [767]	1599 [755]	1558 [735]	1522 [718]	1503 [709]	1444 [681]	1399 [660]
						RPM	938	959	983	1011	1025	1052	1089	1090	1117	1134
						Watts	520	533	541	560	563	578	599	599	605	615
					Tap 4 2nd stage Low Static Cool	CFM	1926 [909]	1890 [892]	1864 [880]	1822 [860]	1794 [847]	1758 [830]	1710 [807]	1670 [788]	1579 [745]	1493 [705]
						RPM	999	1014	1040	1061	1079	1096	1119	1128	1138	1144
						Watts	654	660	674	688	699	708	714	705	683	661
2nd Stage Tap 4	Tap 5	2nd Stage High Static Cool	CFM	2096 [989]	2057 [971]	2003 [945]	1951 [921]	1890 [892]	1819 [858]	1756 [829]	1686 [796]	1610 [760]	1498 [707]			
			RPM	1069	1092	1106	1116	1121	1129	1138	1140	1148	1154			
			Watts	829	846	840	822	807	782	768	730	708	679			

Notes: (1) Set 2 through 4 ton Cool to Tap 2 for AHRI rated performance. (2) Set 5 ton 1st Stage Cool to Tap 1 for AHRI rated performance.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	2000 [944]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.12 [.030]	.17 [.042]

[] Designates Metric Conversions

ELECTRICAL DATA – RACA13 SERIES					
		036ACD***AA	042ACT***AA	048ACT***AA	060ACT***AA
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	197-253
	Volts	208/230	208/230	208/230	208/230
	Phase	3	3	3	3
	Hz	60	60	60	60
	Minimum Circuit Ampacity	16	24	25	32
	Minimum Overcurrent Protection Device Size	20	25	25	35
	Maximum Overcurrent Protection Device Size	20	35	35	45
Compressor Motor	No.	1	1	1	1
	Volts	208/230	208/230	208/230	208/230
	Phase	3	3	3	3
	RPM	3450	3450	3450	3500
	HP, Compressor 1	3 1/3	3 1/2	4	5
	Amps (RLA), Comp. 1	9	13.2	13.1	17.8
	Amps (LRA), Comp. 1	71	88	83.1	110
Condenser Motor	No.	1	1	1	1
	Volts	208/230	208/230	208/230	208/230
	Phase	1	1	1	1
	HP	1/3	1/3	1/3	1/3
	Amps (FLA, each)	1.5	1.5	2	2
	Amps (LRA, each)	3	3	3.9	3.9
Evaporator Fan	No.	1	1	1	1
	Volts	208/230	208/230	208/230	208/230
	Phase	1	1	1	1
	HP	1/2	3/4	3/4	1
	Amps (FLA, each)	2.5	6	6	7.6
	Amps (LRA, each)	4.6			

1. Horsepower Per Compressor.
 2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RACA14 SERIES						
		024AJD***AA	030AJD***AA	036ACD***AA	036AJD***AA	042ACT***AA
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3
	Hz	60	60	60	60	60
	Minimum Circuit Ampacity	17	20	16	22	24
	Minimum Overcurrent Protection Device Size	20	20	20	25	25
	Maximum Overcurrent Protection Device Size	25	30	20	35	35
Compressor Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3
	RPM	3450	3450	3450	3450	3450
	HP, Compressor 1	2 1/6	2 2/3	3 1/3	3 1/3	3 1/2
	Amps (RLA), Comp. 1	11.2	12.8	9	14.1	13.2
	Amps (LRA), Comp. 1	60.8	64	71	77	88
Condenser Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	1.5	1.5	1.5	1.5	1.5
	Amps (LRA, each)	3	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/4	1/2	1/2	1/2	3/4
	Amps (FLA, each)	1.3	2.4	2.5	2.5	6
	Amps (LRA, each)	2.3	5.1	4.6	4.6	

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RACA14 SERIES						
		042AJT***AA	048ACT***AA	048AJT***AA	060ACT***AA	060AJT***AA
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	197-253	197-253
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	3	1	3	1
	Hz	60	60	60	60	60
	Minimum Circuit Ampacity	30	25	33	32	41
	Minimum Overcurrent Protection Device Size	30	25	35	35	45
	Maximum Overcurrent Protection Device Size	45	35	50	45	60
Compressor Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	3	1	3	1
	RPM	3450	3450	3450	3500	3500
	HP, Compressor 1	3 1/2	4	4	5	5
	Amps (RLA), Comp. 1	17.9	13.1	19.9	17.8	24.4
	Amps (LRA), Comp. 1	112	83.1	109	110	144.2
Condenser Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	1.5	2	2	2	2
	Amps (LRA, each)	3	3.9	3.9	3.9	3.9
Evaporator Fan	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	3/4	3/4	3/4	1	1
	Amps (FLA, each)	6	6	6	7.6	7.6
	Amps (LRA, each)					

1. Horsepower Per Compressor.
 2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RACA15 SERIES						
		024AJT***AA	030AJT***AA	036ACT***AA	036AJT***AA	042ACT***AA
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3
	Hz	60	60	60	60	60
	Minimum Circuit Ampacity	19	21	17	24	24
	Minimum Overcurrent Protection Device Size	20	25	20	25	25
	Maximum Overcurrent Protection Device Size	25	30	25	35	35
Compressor Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3
	RPM	3450	3450	3450	3450	3450
	HP, Compressor 1	2 1/6	2 2/3	3 1/3	3 1/3	3 1/2
	Amps (RLA), Comp. 1	11.2	12.8	9	14.1	13.2
	Amps (LRA), Comp. 1	60.8	64	71	77	88
Condenser Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	1.5	1.5	1.5	1.5	1.5
	Amps (LRA, each)	3	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/3	1/2	1/2	1/2	3/4
	Amps (FLA, each)	2.8	2.8	4.1	4.1	6
	Amps (LRA, each)					

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RACA15 SERIES

		042AJT***AA	048ACT***AA	048AJT***AA	060ACT***AA	060AJT***AA
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	197-253	197-253
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	3	1	3	1
	Hz	60	60	60	60	60
	Minimum Circuit Ampacity	30	25	33	30	46
	Minimum Overcurrent Protection Device Size	30	25	35	50	50
	Maximum Overcurrent Protection Device Size	45	35	50	45	70
Compressor Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	3	1	3	1
	RPM	3450	3450	3450	3450	3450
	HP, Compressor 1	3 1/2	4	4	5	5
	Amps (RLA), Comp. 1	17.9	13.1	19.9	16.2	28.8
	Amps (LRA), Comp. 1	112	83.1	109	110	152.9
Condenser Motor	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	1.5	2	2	2	2
	Amps (LRA, each)	3	3.9	3.9	3.9	3.9
Evaporator Fan	No.	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1
	HP	3/4	3/4	3/4	1	1
	Amps (FLA, each)	6	6	6	7.6	7.6
	Amps (LRA, each)					

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

Copper Wire Size—AWG (1% Voltage Drop)

SUPPLY WIRE LENGTH-FEET	300	250	200	150	100	50	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125
300	4	3	2	2	1	1/0	1/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	250	250	250	250	300	300	300						
250	4	4	3	3	2	1	1	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	4/0	250	250	250						
200	6	4	4	4	3	2	2	1	1	1/0	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	3/0	3/0	4/0	4/0	4/0						
150	8	6	6	4	4	4	3	3	2	2	1	1	1/0	1/0	1/0	2/0	2/0	2/0	2/0	2/0	3/0	3/0	3/0						
100	10	8	8	6	6	6	4	4	4	3	3	2	2	2	2	3	3	2	2	1	1	1	1						
50	14	12	10	10	8	8	6	6	6	4	4	4	4	4	4	4	4	3	3	3	2	2	2						

Notes: 1. Wire size based on 60°C. type copper conductors below 100 ampacity.

2. Wire size based on 75°C. type copper conductors for 100 ampacity and above.



Air

Electric Heater Kits
RACA13 Series

208/240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply for Both Unit and Heater Kit							Separate Power Supply for Both Unit and Heater Kit						
Model No. RACA-	RXQJ-Heater Kit Nominal kW	No. of Sequence Steps	Rated Heater kW @ 208/240V	Heater kBTU/Hr @ 208/240V	Heater Amp @ 208/240V	Heater Kit			Air Conditioner				
						Unit Min. Ckt. Ampacity @ 208/240V	Over Current Protective Device Size Min./Max. @ 208V	Over Current Protective Device Size Min./Max. @ 240V	Heater Kit				Air Conditioner
									Min. Ckt. Ampacity 208/240V	Max. Fuse Size 208/240V	Min. Circuit Ampacity 208/240V	Over Current Protective Device Size Min./Max. @ 208V	Over Current Protective Device Size Min./Max. @ 240V
13036ACD***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	16/16 29/32 41/47	20/20 30/30 45/45	20/20 35/35 50/50	— 25/29 38/44	— 25/30 40/45	16/16 16/16 16/16	20/20 20/20 20/20	20/20 20/20 20/20
13042ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	24/24 33/37 46/51	25/35 35/35 50/50	25/35 40/40 60/60	— 25/29 38/44	— 25/30 40/45	24/24 24/24 24/24	25/35 25/35 25/35	25/35 25/35 25/35
13048ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	25/25 33/37 46/51	25/35 35/35 50/50	25/35 40/40 60/60	— 25/29 38/44	— 25/30 40/45	25/25 25/25 25/25	25/35 25/35 25/35	25/35 25/35 25/35
13060ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	32/32 35/39 48/53	35/45 35/35 50/50	35/45 40/40 60/60	— 25/29 38/44	— 25/30 40/45	32/32 32/32 32/32	35/45 35/45 35/45	35/45 35/45 35/45



INTEGRATED AIR & WATER



Air

Electric Heater Kits
RACA14 Series

208/240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

208/240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Single Power Supply for Both Unit and Heater Kit						Separate Power Supply for Both Unit and Heater Kit								
Model No. RACA-	Heater Kit					Air Conditioner				Heater Kit			Air Conditioner	
	RXQJ-Heater Kit Nominal kW	No. of Sequence Steps	Rated Heater kW @ 208/240V	Heater kBtu/Hr @ 208/240V	Heater Amp @ 208/240V	Unit Min. Ckt. Ampacity @ 208/240V	Min./Max @ 208V	Over Current Protective Device Size Min./Max. @ 240V	Min. Ckt. Ampacity 208/240V	Max. Fuse Size 208/240V	Min. Circuit Ampacity 208/240V	Over Current Protective Device Size Min./Max. @ 208V	Min./Max. @ 240V	
14024AJD***AA	No Heat	—	—	—	—	17/17	20/25	20/25	—	—	17/17	20/25	20/25	
	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	24/27	25/25	30/30	22/25	25/25	17/17	20/25	20/25	
	A10J	1	7.2/9.6	24.57/32.76	34.6/40.0	45/52	45/45	60/60	44/50	45/50	17/17	20/25	20/25	
14030AJD***AA	No Heat	—	—	—	—	20/20	20/30	20/30	—	—	20/20	20/30	20/30	
	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	25/28	25/25	30/30	22/25	25/25	20/20	20/30	20/30	
	A10J	1	7.2/9.6	24.57/32.76	34.6/40.0	47/53	50/50	60/60	44/50	45/50	20/20	20/30	20/30	
14036AJD***AA	No Heat	—	—	—	—	22/22	25/35	25/35	—	—	22/22	25/35	25/35	
	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	25/29	25/25	30/30	22/25	25/25	22/22	25/35	25/35	
	A10J	1	7.2/9.6	24.57/32.76	34.6/40.0	47/54	50/50	60/60	44/50	45/50	22/22	25/35	25/35	
14042AJT***AA	A15J	1	10.8/14.4	36.85/49.13	51.9/60.0	68/79	70/70	80/80	65/75	70/80	22/22	25/35	25/35	
	No Heat	—	—	—	—	30/30	30/45	30/45	—	—	30/30	30/45	30/45	
	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	30/33	30/30	35/35	22/25	25/25	30/30	30/45	30/45	
14048AJT***AA	B10J	1	7.2/9.6	24.57/32.76	34.6/40.0	51/58	60/60	60/60	44/50	45/50	30/30	30/45	30/45	
	B15J	1	10.8/14.4	36.85/49.13	51.9/60.0	73/83	80/80	90/90	65/75	70/80	30/30	30/45	30/45	
	No Heat	—	—	—	—	33/33	35/50	35/50	—	—	33/33	35/50	35/50	
14048AJT***AA	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	33/33	35/35	35/35	22/25	25/25	33/33	35/50	35/50	
	B10J	1	7.2/9.6	24.57/32.76	34.6/40.0	51/58	60/60	60/60	44/50	45/50	33/33	35/50	35/50	
	B15J	1	10.8/14.4	36.85/49.13	51.9/60.0	73/83	80/80	90/90	65/75	70/80	33/33	35/50	35/50	
14060AJT***AA	No Heat	—	—	—	—	41/41	45/60	45/60	—	—	41/41	45/60	45/60	
	A05J	1	3.6/4.8	12.28/16.38	17.3/20.0	41/41	45/45	45/45	22/25	25/25	41/41	45/60	45/60	
	B10J	1	7.2/9.6	24.57/32.76	34.6/40.0	53/60	60/60	60/60	44/50	45/50	41/41	45/60	45/60	
14060AJT***AA	B15J	1	10.8/14.4	36.85/49.13	51.9/60.0	75/85	80/80	90/90	65/75	70/80	41/41	45/60	45/60	
	No Heat	—	—	—	—	—	—	—	—	—	—	—	—	

208/240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

208/240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply for Both Unit and Heater Kit						Separate Power Supply for Both Unit and Heater Kit							
Model No. RACA-	RXQJ-Heater Kit Nominal kW	No. of Sequence Steps	Heater Kit			Air Conditioner			Air Conditioner				
			Rated Heater kW @ 208/240V	Heater kBTU/Hr @ 208/240V	Heater Amp @ 208/240V	Unit Min. Ckt. Ampacity @ 208/240V	Over Current Protective Device Size		Min. Circuit Ampacity 208/240V	Max. Fuse Size 208/240V	Min. Ckt Ampacity 208/240V	Over Current Protective Device Size	
							Min./Max. @ 208V	Min./Max. @ 240V				Min./Max. @ 208V	Min./Max. @ 240V
14036ACD***AA	No Heat	—	—	—	—	16/16	20/20	20/20	16/16	—	20/20	20/20	20/20
	A10C	1	7.2/9.6	24.57/32.76	20.0/23.1	29/32	30/30	35/35	16/16	25/30	20/20	20/20	20/20
14042ACT***AA	A15C	1	10.8/14.4	36.85/49.13	30.1/34.7	41/47	45/45	50/50	16/16	40/45	20/20	20/20	20/20
	No Heat	—	—	—	—	24/24	25/35	25/35	24/24	—	25/35	25/35	25/35
14042ACT***AA	A10C	1	7.2/9.6	24.57/32.76	20.0/23.1	33/37	35/35	40/40	24/24	25/30	25/35	25/35	25/35
	A15C	1	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	24/24	40/45	25/35	25/35	25/35
14048ACT***AA	No Heat	—	—	—	—	25/25	25/35	25/35	25/25	—	25/35	25/35	25/35
	A10C	1	7.2/9.6	24.57/32.76	20.0/23.1	33/37	35/35	40/40	25/25	25/30	25/35	25/35	25/35
14048ACT***AA	A15C	1	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	25/25	40/45	25/35	25/35	25/35
	No Heat	—	—	—	—	32/32	35/45	35/45	32/32	—	35/45	35/45	35/45
14060ACT***AA	A10C	1	7.2/9.6	24.57/32.76	20.0/23.1	35/39	35/35	40/40	32/32	25/30	35/45	35/45	35/45
	A15C	1	10.8/14.4	36.85/49.13	30.1/34.7	48/53	50/50	60/60	32/32	40/45	35/45	35/45	35/45





Air

Electric Heater Kits
RACA15 Series


208/240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply for Both Unit and Heater Kit												
Model No. RACA-	Heater Kit				Air Conditioner				Heater Kit			
	RXQJ-Heater Kit Nominal kW	No. of Sequence Steps	Rated Heater kW @ 208/240V	Heater kBTU/Hr @ 208/240V	Heater Amp @ 208/240V	Unit Min. Ckt. Ampacity @ 208/240V	Over Current Protective Device Size		Min. Ckt. Ampacity 208/240V	Max. Fuse Size 208/240V	Air Conditioner	
							Min./Max @ 208V	Min./Max. @ 240V			Min. Ckt. Ampacity 208/240V	Over Current Protective Device Size Min./Max. @ 208V Min./Max. @ 240V
15024AJT***AA	No Heat A05J A10J	— 1 1	— 3.6/4.8 7.2/9.6	— 12.28/16.38 24.57/32.76	— 17.3/20.0 34.6/40.0	19/19 26/29 47/54	20/25 30/30 50/50	20/25 30/30 60/60	— 22/25 44/50	— 25/25 45/50	19/19 19/19 19/19	20/25 20/25 20/25
15030AJT***AA	No Heat A05J A10J	— 1 1	— 3.6/4.8 7.2/9.6	— 12.28/16.38 24.57/32.76	— 17.3/20.0 34.6/40.0	21/21 26/29 47/54	25/30 30/30 50/50	25/30 30/30 60/60	— 22/25 44/50	— 25/25 45/50	21/21 21/21 21/21	25/30 25/30 25/30
15036AJT***AA	No Heat A05J A10J A15J	— 1 1 1	— 3.6/4.8 7.2/9.6 10.8/14.4	— 12.28/16.38 24.57/32.76 36.85/49.13	— 17.3/20.0 34.6/40.0 51.9/60.0	24/24 27/31 49/56 70/81	25/35 30/30 50/50 70/70	25/35 35/35 60/60 90/90	— 22/25 44/50 65/75	— 25/25 45/50 70/80	24/24 24/24 24/24 24/24	25/35 25/35 25/35 25/35
15042AJT***AA	No Heat A05J B10J B15J	— 1 1 1	— 3.6/4.8 7.2/9.6 10.8/14.4	— 12.28/16.38 24.57/32.76 36.85/49.13	— 17.3/20.0 34.6/40.0 51.9/60.0	30/30 30/33 51/58 73/83	30/45 30/30 60/60 80/80	30/45 35/35 60/60 90/90	— 22/25 44/50 65/75	— 25/25 45/50 70/80	30/30 30/30 30/30 30/30	30/45 30/45 30/45 30/45
15048AJT***AA	No Heat A05J B10J B15J	— 1 1 1	— 3.6/4.8 7.2/9.6 10.8/14.4	— 12.28/16.38 24.57/32.76 36.85/49.13	— 17.3/20.0 34.6/40.0 51.9/60.0	33/33 33/33 51/58 73/83	35/50 35/35 60/60 80/80	35/50 35/35 60/60 90/90	— 22/25 44/50 65/75	— 25/25 45/50 70/80	33/33 33/33 33/33 33/33	35/50 35/50 35/50 35/50
15060AJT***AA	No Heat A05J B10J B15J	— 1 1 1	— 3.6/4.8 7.2/9.6 10.8/14.4	— 12.28/16.38 24.57/32.76 36.85/49.13	— 17.3/20.0 34.6/40.0 51.9/60.0	46/46 46/46 53/60 75/85	50/70 50/50 60/60 80/80	50/70 50/50 60/60 90/90	— 22/25 44/50 65/75	— 25/25 45/50 70/80	46/46 46/46 46/46 46/46	50/70 50/70 50/70 50/70

208/240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply for Both Unit and Heater Kit												
Model No. RACA-	Heater Kit				Air Conditioner				Heater Kit			
	RXQJ-Heater Kit Nominal kW	No. of Sequence Steps	Rated Heater kW @ 208/240V	Heater kBTU/Hr @ 208/240V	Heater Amp @ 208/240V	Unit Min. Ckt. Ampacity @ 208/240V	Over Current Protective Device Size		Min. Ckt. Ampacity 208/240V	Max. Fuse Size 208/240V	Air Conditioner	
							Min./Max @ 208V	Min./Max. @ 240V			Min. Ckt. Ampacity 208/240V	Over Current Protective Device Size Min./Max. @ 208V Min./Max. @ 240V
15036ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	17/17 31/34 43/49	20/25 35/35 45/45	20/25 35/35 50/50	— 25/29 38/44	— 25/30 40/45	17/17 17/17 17/17	20/25 20/25 20/25
15042ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	24/24 33/37 46/51	25/35 35/35 50/50	25/35 40/40 60/60	— 25/29 38/44	— 25/30 40/45	24/24 24/24 24/24	25/35 25/35 25/35
15048ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	25/25 33/37 46/51	25/35 35/35 50/50	25/35 40/40 60/60	— 25/29 38/44	— 25/30 40/45	25/25 25/25 25/25	25/35 25/35 25/35
15060ACT***AA	No Heat A10C A15C	— 1 1	— 7.2/9.6 10.8/14.4	— 24.57/32.76 36.85/49.13	— 20.0/23.1 30.1/34.7	30/30 35/39 48/53	50/45 50/50 60/60	50/45 50/50 60/60	— 25/29 38/44	— 25/30 40/45	30/30 30/30 30/30	50/45 50/45 50/45




INTEGRATED AIR & WATER


UNIT DIMENSIONS PACKAGE AIR CONDITIONERS

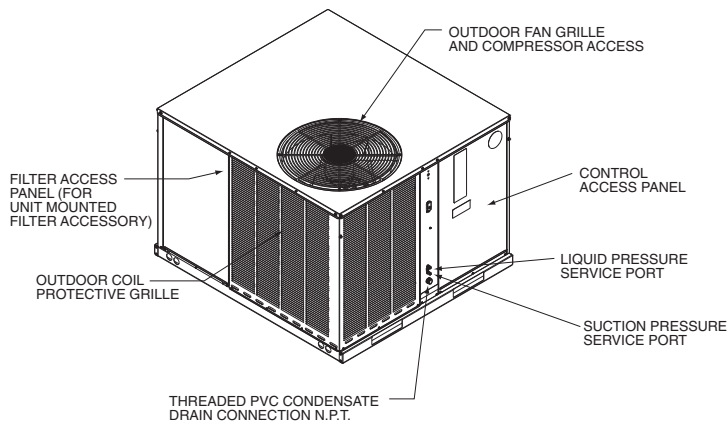


IMPORTANT: UNIT MUST BE LEVEL TO PREVENT WATER MIGRATION

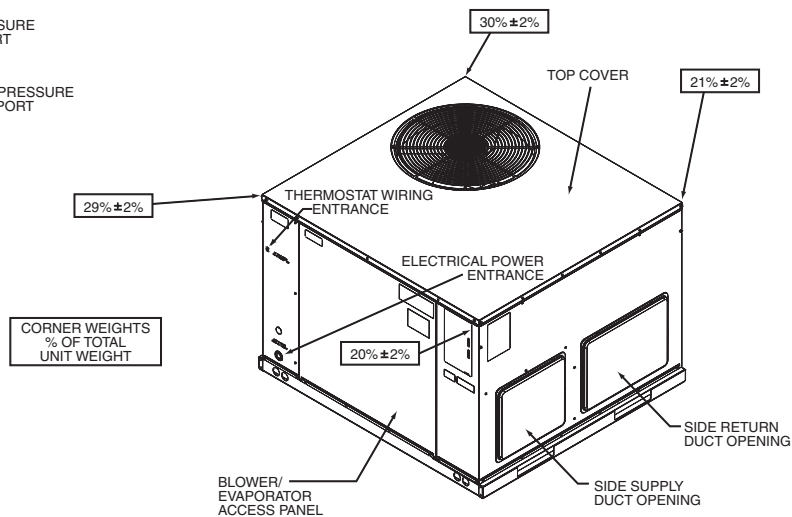

TOP VIEW

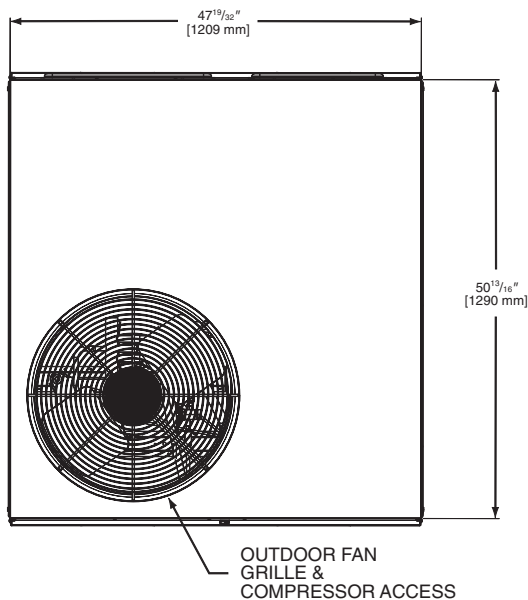


BOTTOM VIEW

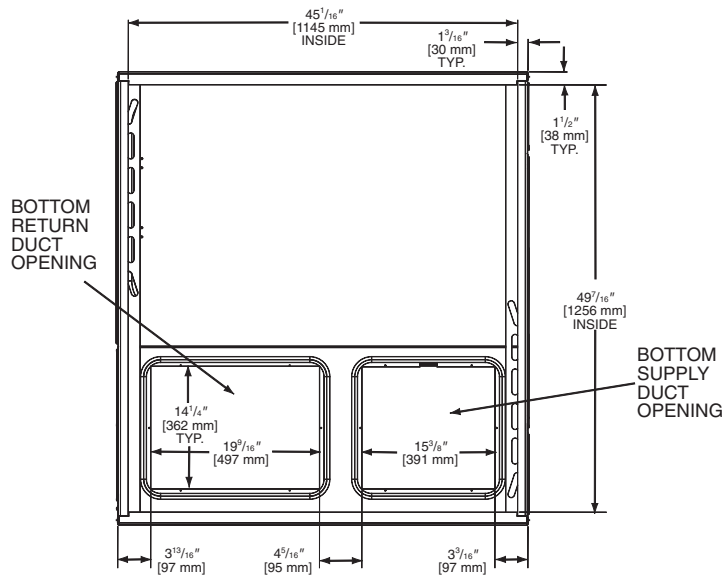


[] Designates Metric Conversions


SIDE VIEW

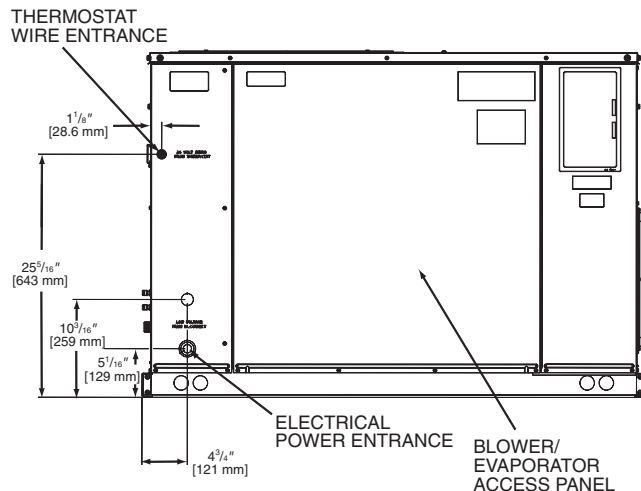


SIDE VIEW

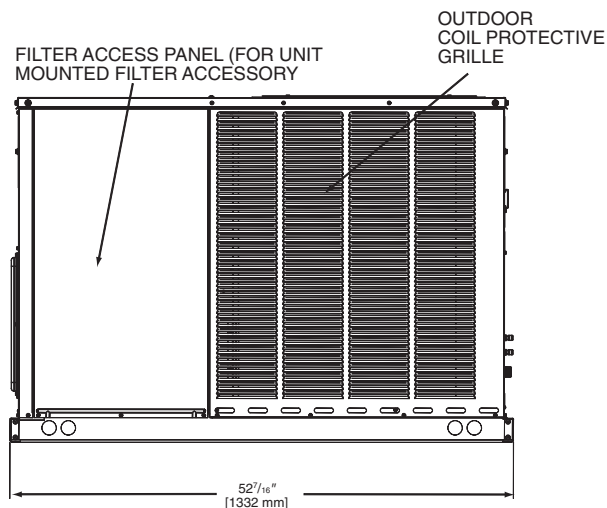

FRONT VIEW

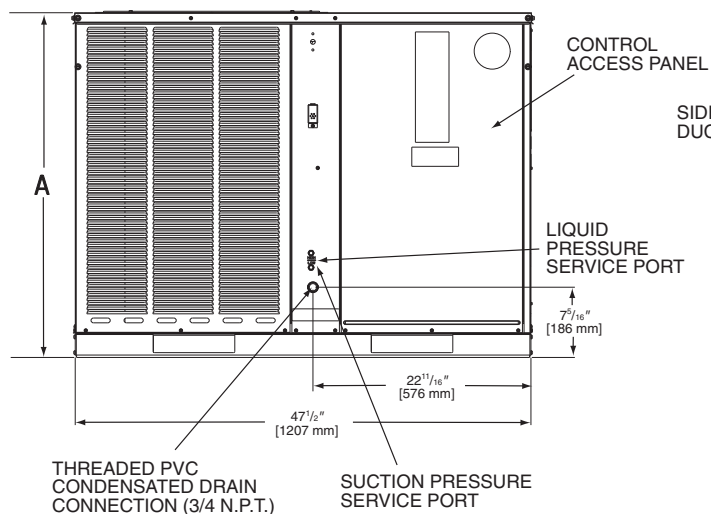



REAR VIEW

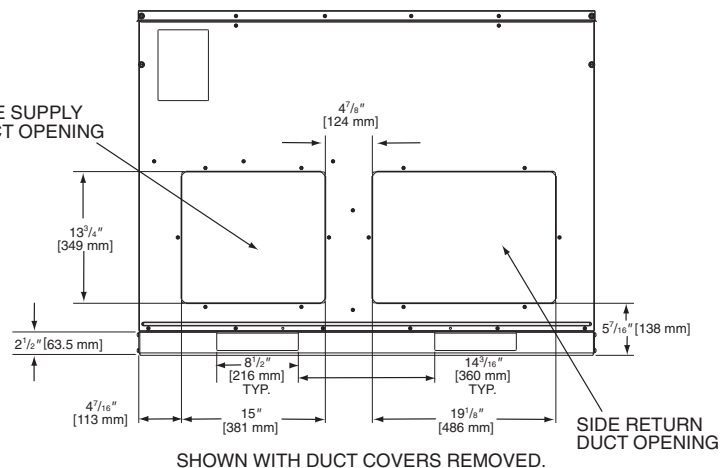

IMPORTANT:
Unit must be level to
prevent water migration.

Model #	Height "A"
024, 030, 036, 042	$35\frac{15}{16}"$
048, 060	41

[] Designates Metric Conversions

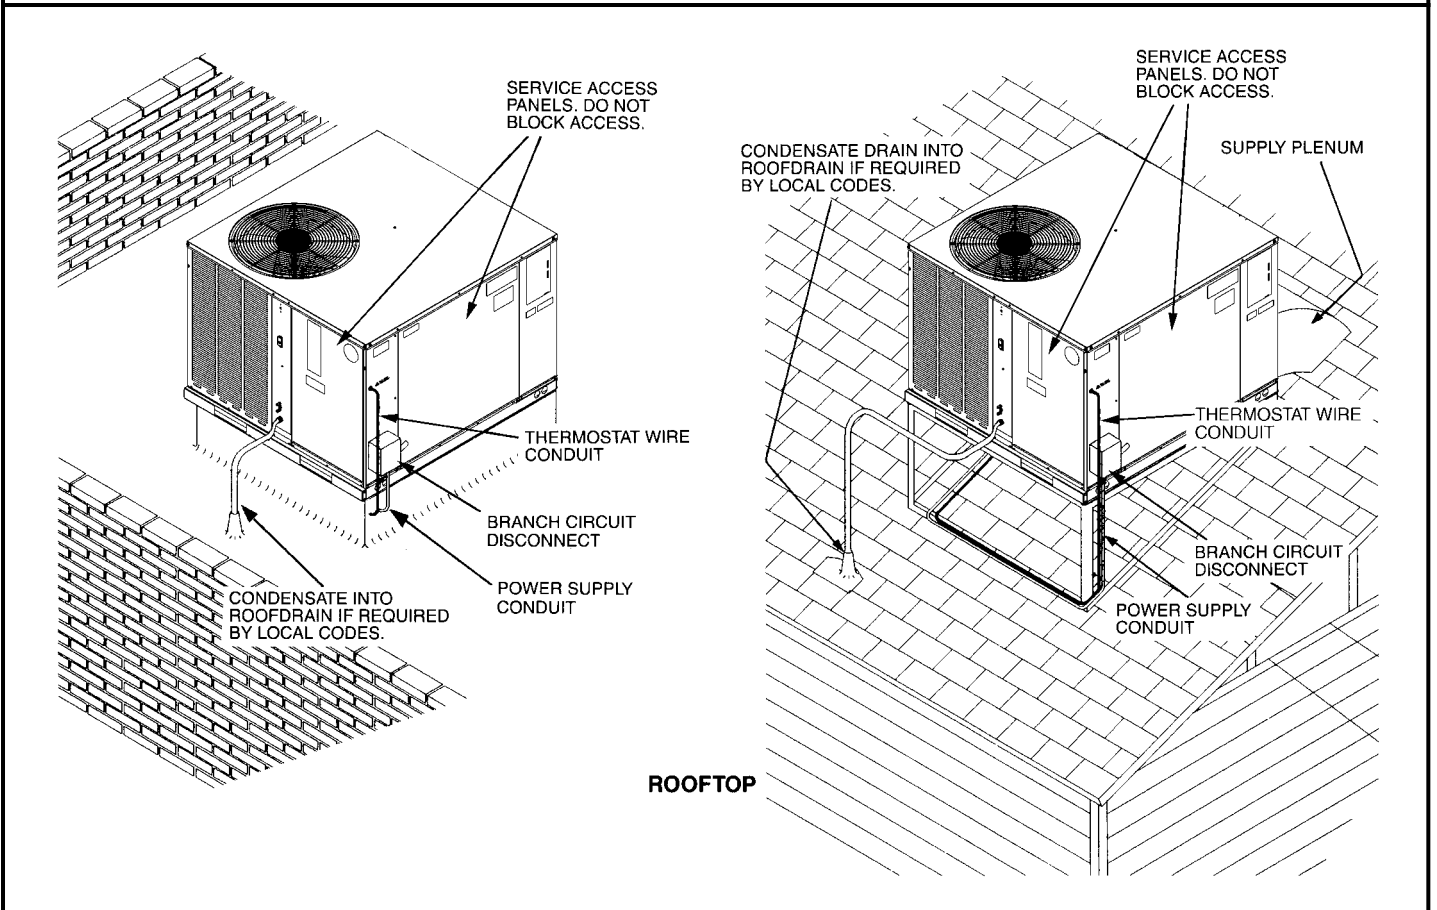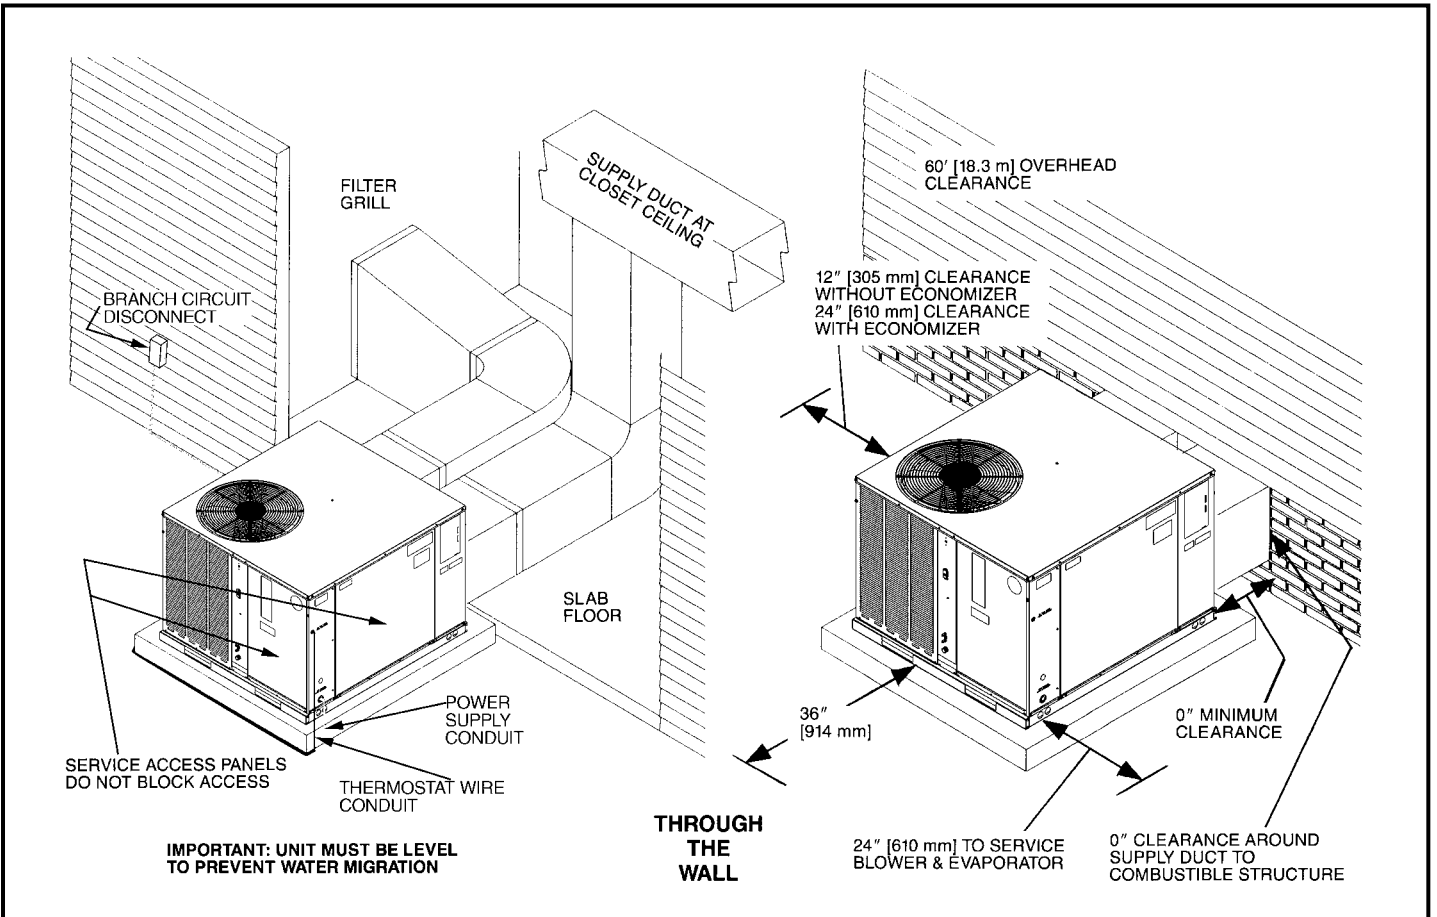

[] Designates Metric Conversions


ACCESSORY EQUIPMENT

Accessory Description	Model Application	Accessory Model No.
Thermostats	RACA13/14/15	See Thermostat Specification Sheet (T11-001)
Roofcurbs	RACA13/14/15	RXSG-AAA08 (8" [203 mm] Height) RXSG-AAA14 (14" [356 mm] Height) RXSG-AAA24 (24" [610 mm] Height)
Supply & Return Diffusers	RACA13/14/15	RXRN-BD15
Economizers (Sideflow ONLY)	RACA13/14/15	AXRE-CCA30 (3 Position) AXRD-CCM10 (Fully Modulating)
Economizers (Downflow ONLY)	RACA13/14/15	AXRE-CAA30 (3 Position) AXRD-CAM10 (Fully Modulating)
Fresh Air Damper	RACA13/14/15	AXRF-FAB1 (Motorized-35%) AXRF-FAA1 (Fixed-35%)
Rectangular to Round Transition (Downflow)	RACA13/14/15	RXMC-CA02 (16" [406 mm] Ducts) RXMC-CA03 (18" [457 mm] Ducts)
Filter Kit	RACA13/14/15	RXRY-B01
Sideflow Rectangular to Round Transition	RACA13/14/15	AXMC-BA01
Low Ambient Control	RACA13/14/15	RXRZ-B01
High Pressure Control ①	RACA13/14/15	RXAB-E01
Low Pressure Control ②	RACA13/14/15	RXAC-C01


① High pressure switch standard on RACA (13/14/15) 060
② Low pressure switch standard on RACA 15 060.

[] Designates Metric Conversions

COMMON SUPPLY/RETURN CONCENTRIC AIR DIFFUSER

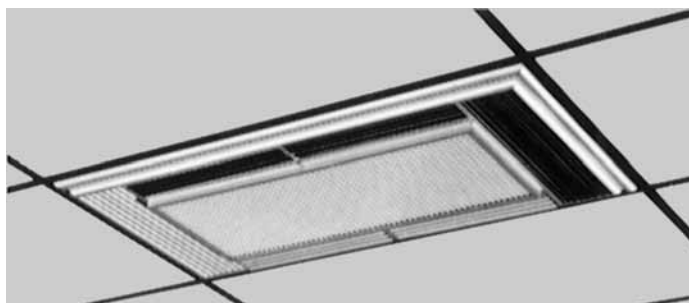


SUPPLY/RETURN DIFFUSER

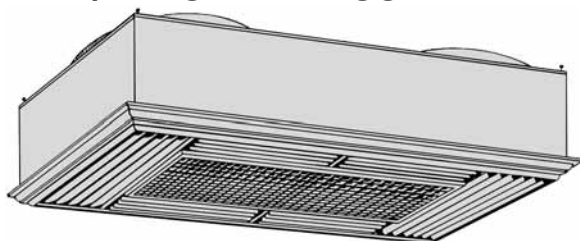

Designed to convert a side by side or an over and under arrangement into a concentric distribution of air. The diffuser is flush mounted, completely insulated, assembled, and internally baffled to provide four way supply air distribution with a center return. To make the assembly complete and ready to fit into a 2' [0.61 m] x 4' [1.22 m] suspended ceiling grid, the diffuser includes adjustable supply louvers, hanging rings, anti-sweat gasket, and round flanges for use with flexible ducts.

Model No. RXRN-	Diameter Inches [mm]	Shipping Wt. Lbs. [kg]	Dimension A Inches [mm]
BD15	16 [406]	90 [40.82]	20 1/2 [521]

DIFFUSER INSTALLS FLUSH WITH CEILING

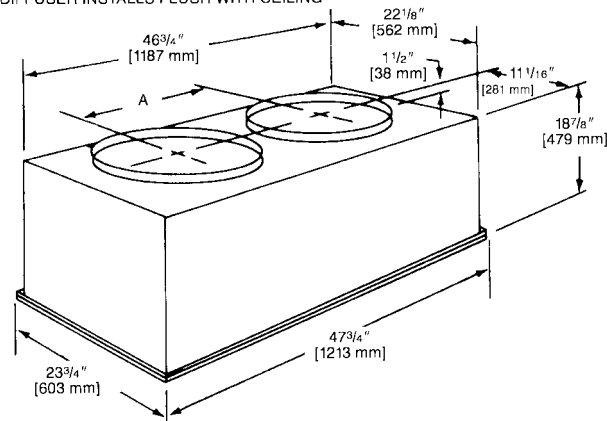

NOTE: The location of the combination supply and return diffuser should not exceed 10 feet [3.05 m] above the floor level for units @ 1000 CFM [472 L/s] or less and 12 [3.66 m] to 14 feet [4.27 m] above the floor level for units with CFM greater than 1000 [472 L/s]. If the diffuser is installed with a greater distance than recommended above, the supply air may become stratified above the required comfort area causing uncomfortable conditions.

AIRFLOW/PRESSURE DROP INFORMATION (INCHES W.C. [kPa])



Accessory	Approximate CFM [L/s]-Supply Air			
	1300 [614]	1575 [743]	1800 [850]	2200 [1038]
Plenum & Supply/Return Duct	.07 [.017]	.10 [.024]	.12 [.030]	.17 [.042]
Diffuser	.09 [.022]	.13 [.032]	.16 [.040]	.24 [.060]
Economizer	.06 [.015]	.09 [.022]	.11 [.027]	.17 [.042]

SUPPLY AIR/PERFORMANCE

Diffuser Airflow CFM [L/s]	Range of Throw Ft. [m]
800 [378]-1200 [566]	14 [4.27]-16 [4.88]
1600 [755]-2000 [944]	18 [5.49]-28 [8.53]

DUCT ADAPTERS RECTANGULAR TO ROUND TRANSITIONS (DOWNFLOW)

RXMC-CA02

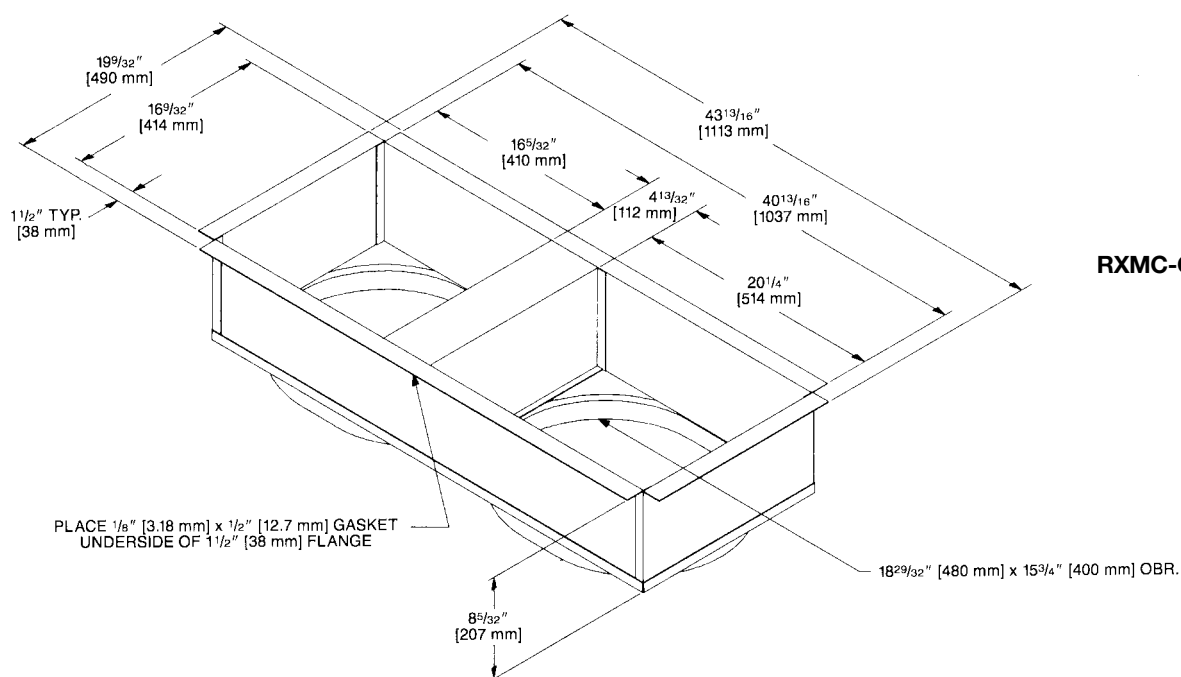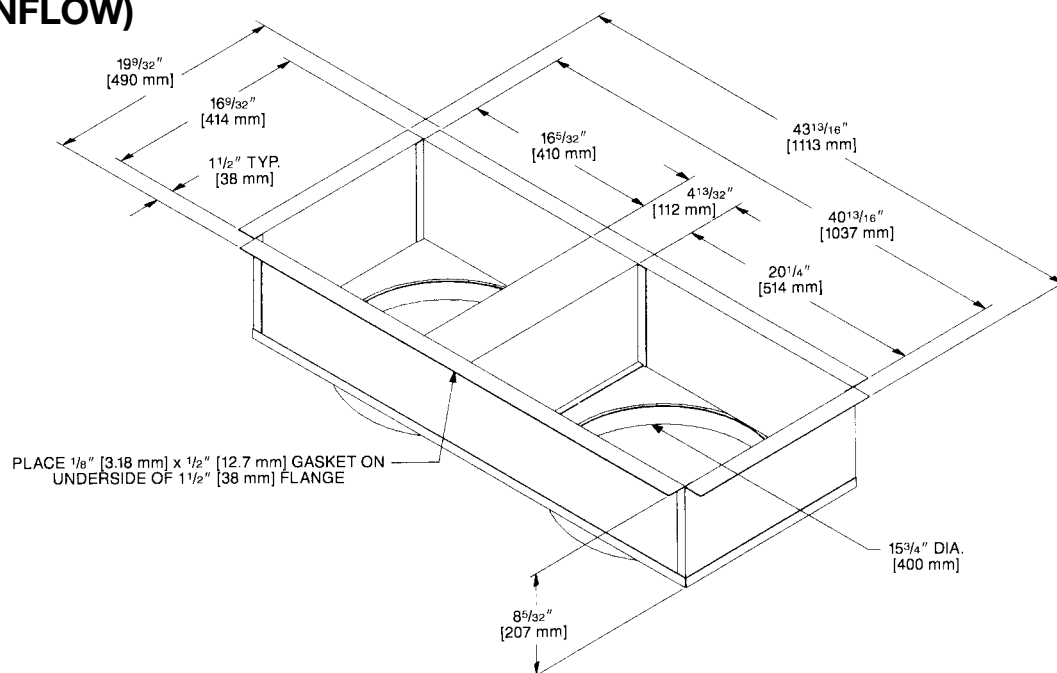

RXMC-CA03

[] Designates Metric Conversions



FRESH AIR DAMPER FOR USE ON RACA13-/RACA14- SERIES

AXRF-FAA1 (Fixed - 0-35%)


The 0-35% manual outside Air Damper is designed to replace the unit return air duct cover. No drilling or damper assembly is required. The amount of outside air (0-35%) is controlled by simply adjusting the side damper.

AXRF-FAB1 (Motorized - 0-35%)

The 0-35% motorized outside Air Damper is designed to replace the unit return air duct cover. No drilling or damper assembly is required. The control motor opens the adjustable slide damper when the unit blower motor is energized.

CAULK INSIDE OF CORNERS
(TYP. 4 PLACES) (304112) MATERIAL

3/4" [19 mm]

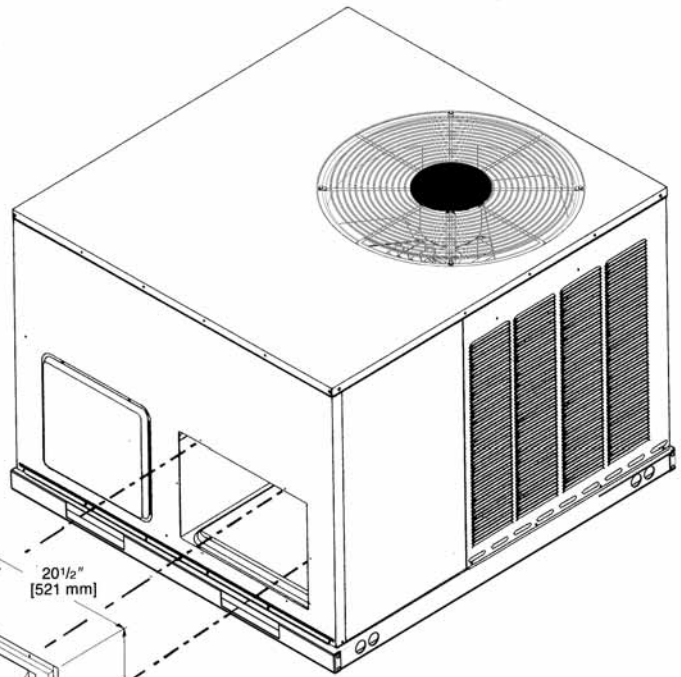

20 1/2" [521 mm]

SHIP HOOD REMOVED

15 1/8" [384 mm]

(304101) GASKET 1/8" [3.18 mm] x 1/2" [12.7 mm]
5/8" [15.87 mm] FLANGE ON BACK SIDE

13 3/4" [349 mm]

12" [305 mm]

ECONOMIZERS

AXRE-CAA30 (3 Position) and AXRD-CAM10 (Fully Modulating)


AXRE-CAA30 (3 Position)

Provided with enthalpy control, and mixed air sensor. Settings include fully open, fully closed and adjustable mid point.

AXRD-CAM10 (Fully Modulating)

Provided with enthalpy control, mixed air sensor and minimum position potentiometer for proportioning (modulating) the amount of fresh air.

Note: See economizer installation instructions for correct filter access door.

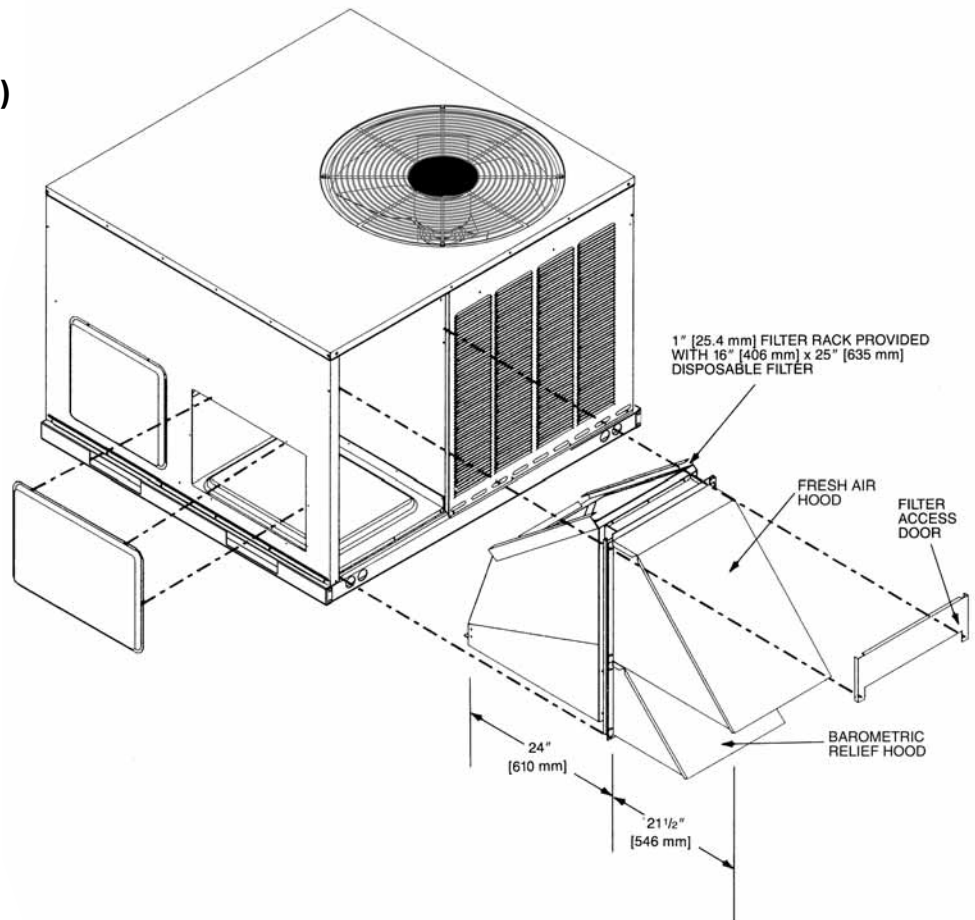

[] Designates Metric Conversions



ECONOMIZERS

AXRE-CAA30 (3 Position) and AXRD-CCM10 (Fully Modulating) for Horizontal Application


AXRE-CCA30 (3 Position)

Has outdoor air sensor, minimum position potentiometer, and mixed air sensor to provide three damper positions.

AXRD-CCM10 (Fully Modulating)

Provided with enthalpy control, mixed air sensor and minimum position potentiometer for proportioning (modulating) the amount of fresh air.

[] Designates Metric Conversions

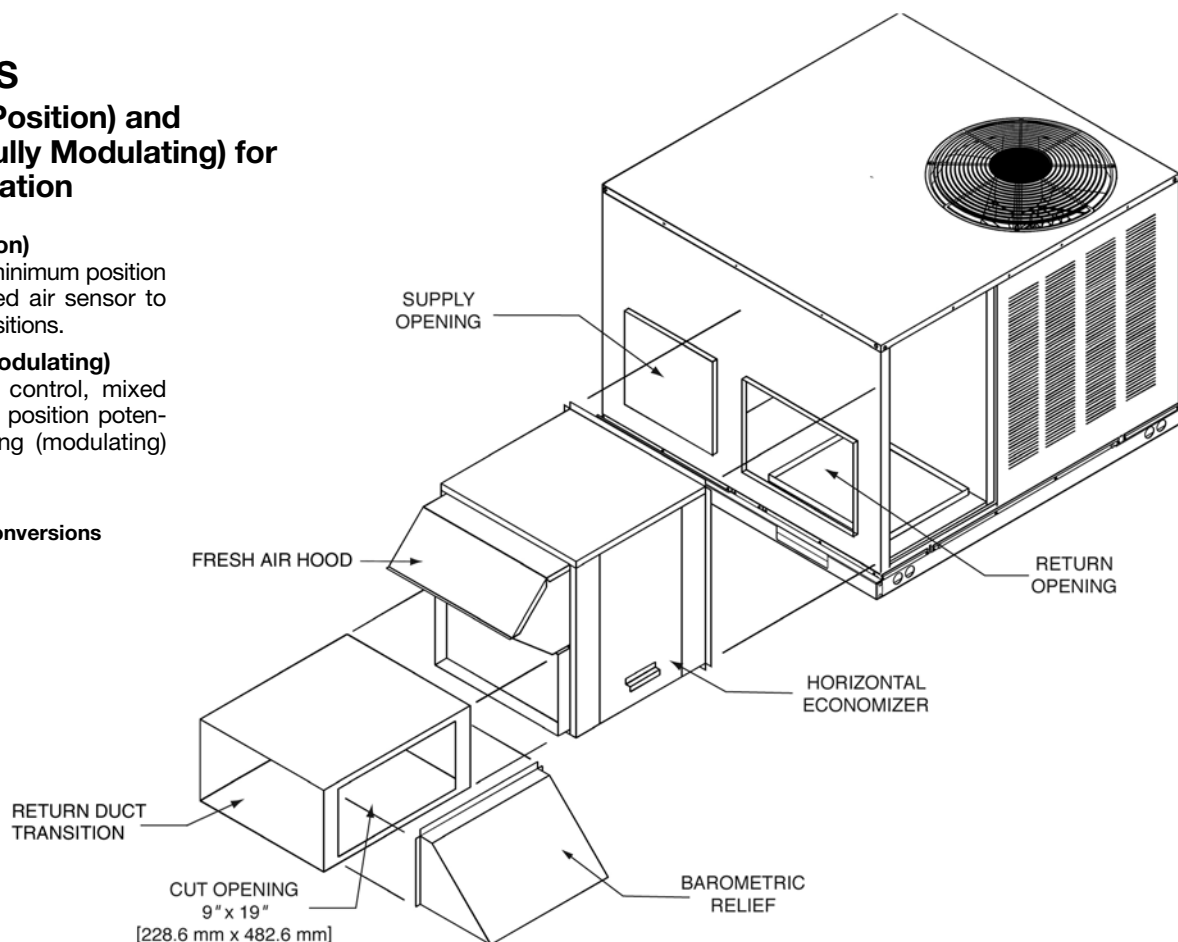

THERMOSTATS

■ Thermostats



200-Series *
Programmable



300-Series *
Deluxe
Programmable

400-Series *
Special Applications/
Programmable

Brand		Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
RHC	-	TST	213	UN	MS
RHC=Rheem		TST=Thermostat	200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable	GE=Gas/Electric UN=Universal (AC/HP/GE) MD=Modulating Furnace DF=Dual Fuel CM=Communicating	SS=Single-Stage MS=Multi-Stage

* Photos are representative. Actual models may vary.


For detailed thermostat match-up information,
see specification sheet form number T11-001.



DUCT ADAPTER SIDEFLOW SQUARE TO ROUND TRANSITION AXMC-BA01

Adapts the side rectangular supply and return openings to 14" [356 mm] diameter round openings. Adapters provided with same finish as unit and also provided with thermal insulation.

[] Designates Metric Conversions

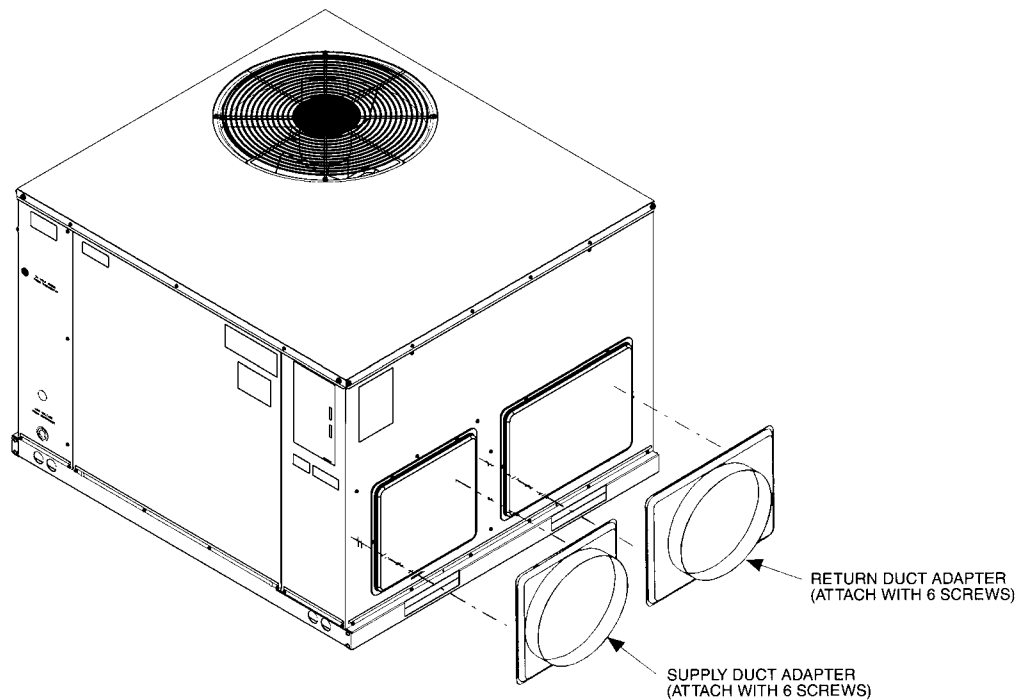



ROOFCURB (Full Perimeter) RXSG-AAA08, RXSG-AAA14 and RXSG-AAA24 for RACA- Series

Hinged corners make for
fast, easy set-up.

RXSG-AAA08
(8" [203 mm] High)

**NOT for use with
RQKA/RQLA/RQMA
Package Heat Pumps.**

NOTE: PERIMETER OF ROOFCURB IS SUPPLIED
WITH A NOMINAL 1" [25.4 mm] x 4" [102 mm] PINE NAILING STRIP.

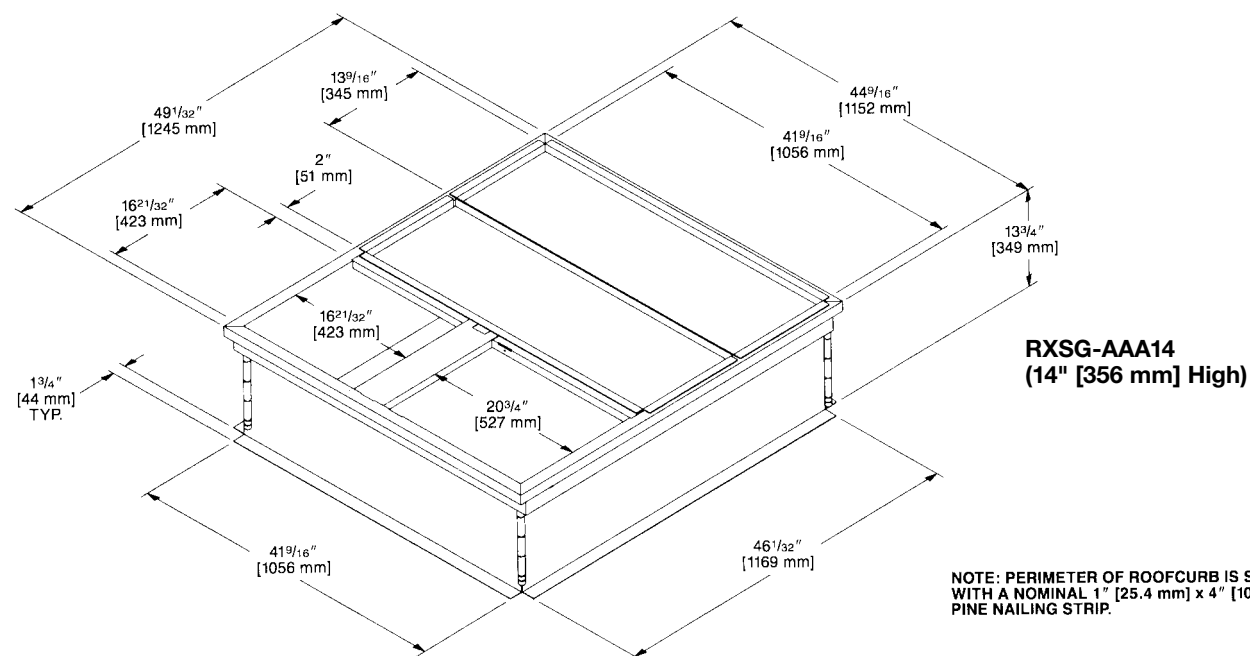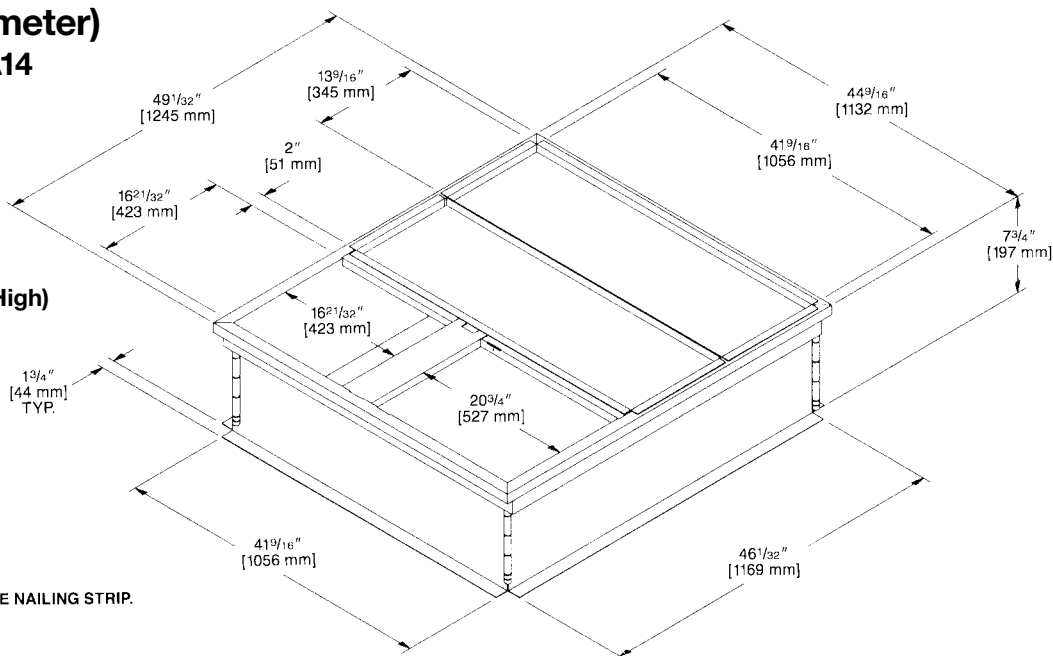


NOTE: PERIMETER OF ROOFCURB IS SUPPLIED
WITH A NOMINAL 1" [25.4 mm] x 4" [102 mm]
PINE NAILING STRIP.

[] Designates Metric Conversions




ROOFCURB (Full Perimeter) (Cont.)

RXSG-AAA24
(24" [610 mm] High)

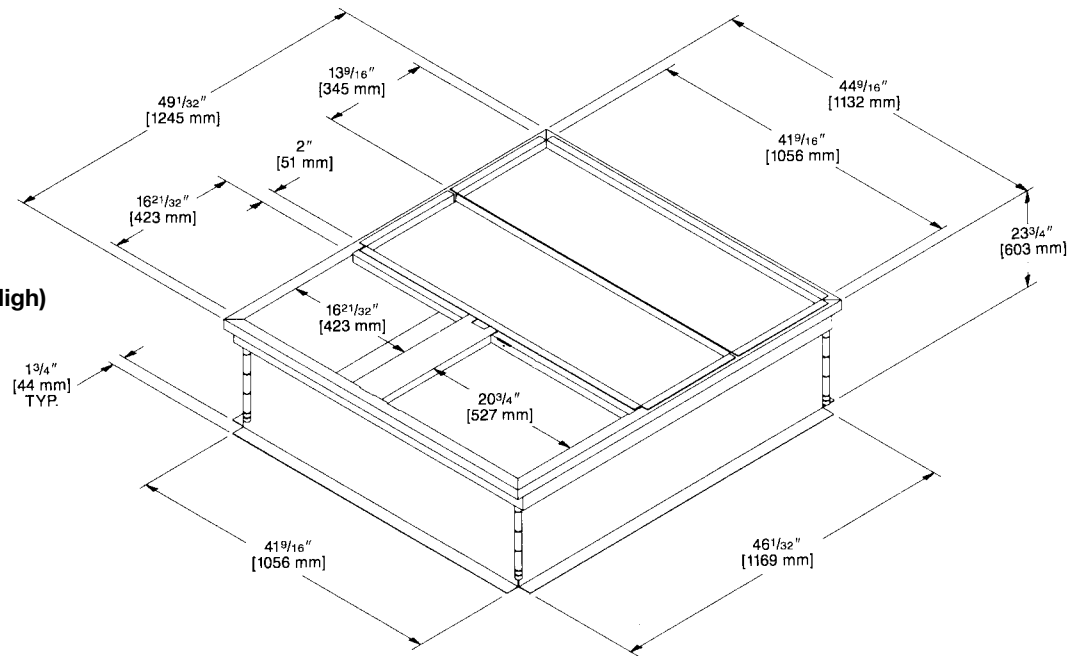


[] Designates Metric Conversions

PACKAGE AIR CONDITIONERS & GAS/ELECTRIC PACKAGE UNITS ROOFCURB INSTALLATION (Full Perimeter)

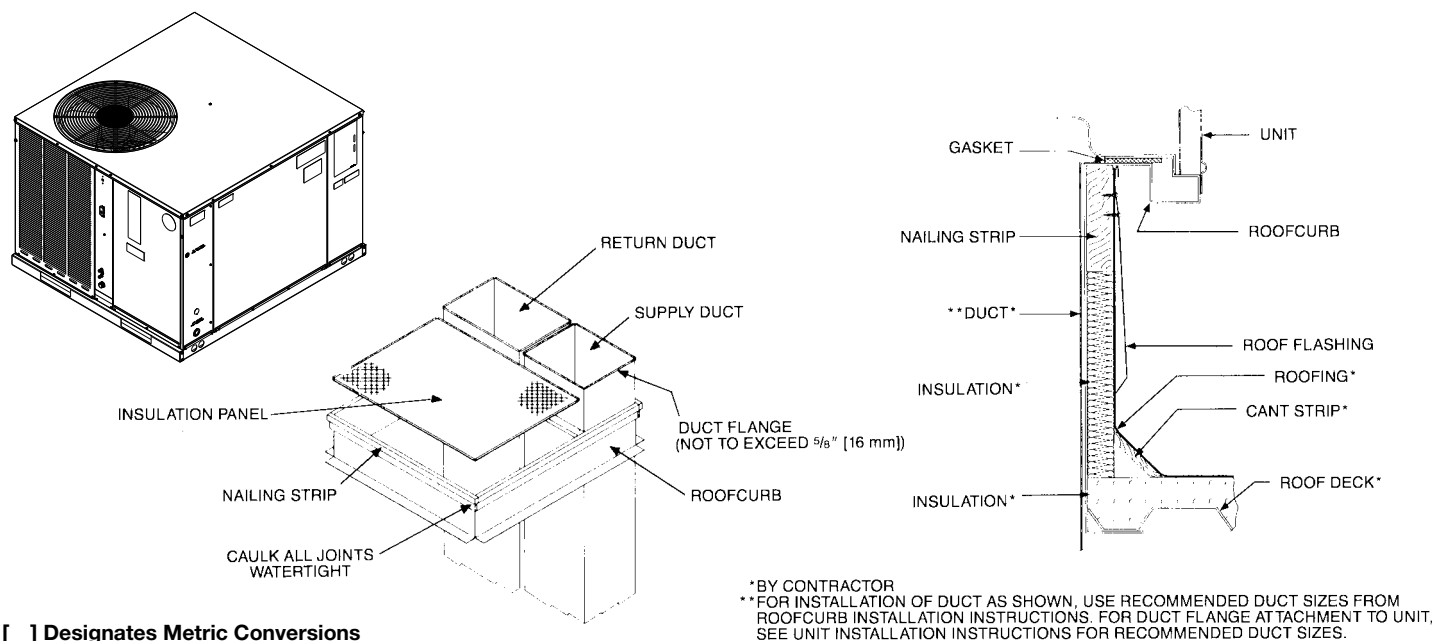

ROOFCURB ADAPTERS

Fabricated from galvanized steel to adapt the New cabinet to the old style curb. All are furnished with a New gasket.

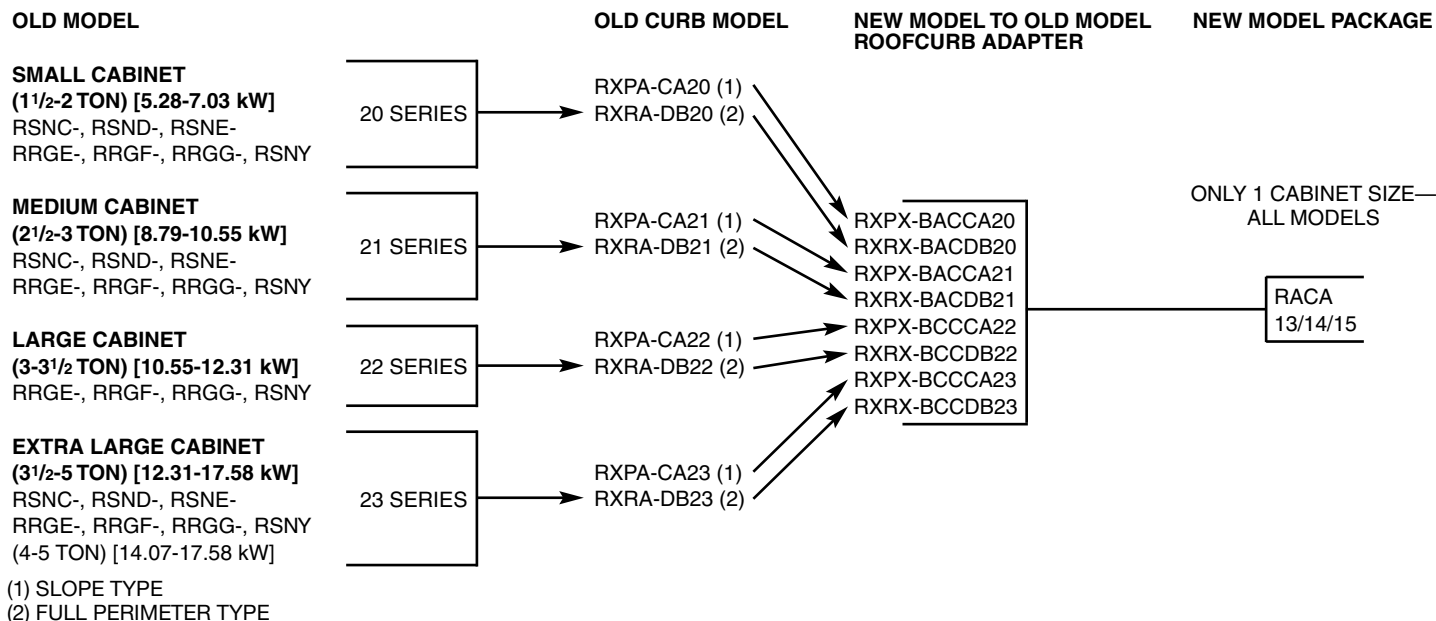




ELECTRIC HEATER KITS—RACA13-

Unit Model Application	Electric Heater Kit Models
RACA (13/14/15) (024/030) AJ	RXQJ-A05J (208-240 volt, 1-ph, 5kW)
	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
RACA (13/14/15) (036/042/048/060) AJ	RXQJ-A05J (208-240 volt, 1-ph, 5kW)
	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
	RXQJ-A15J (208-240 volt, 1-ph, 15kW)
	RXQJ-A05J (208-240 volt, 1-ph, 5kW)
RACA (13/14/15) (036/042/048/060) AC	RXQJ-A10C (208-240 volt, 3-ph, 10kW)
	RXQJ-A15C (208-240 volt, 3-ph, 15kW)
	RXQJ-A10C (208-240 volt, 3-ph, 10kW)


WARNING

ONLY ELECTRIC HEATER KITS SUPPLIED BY THIS MANUFACTURER AS DESCRIBED IN THIS PUBLICATION HAVE BEEN DESIGNED, TESTED, AND EVALUATED BY A NATIONALLY RECOGNIZED SAFETY TESTING AGENCY FOR USE WITH THIS UNIT. USE OF ANY OTHER MANUFACTURED ELECTRIC HEATERS INSTALLED WITHIN THIS UNIT MAY CAUSE HAZARDOUS CONDITIONS RESULTING IN PROPERTY DAMAGE, FIRE, BODILY INJURY OR DEATH.



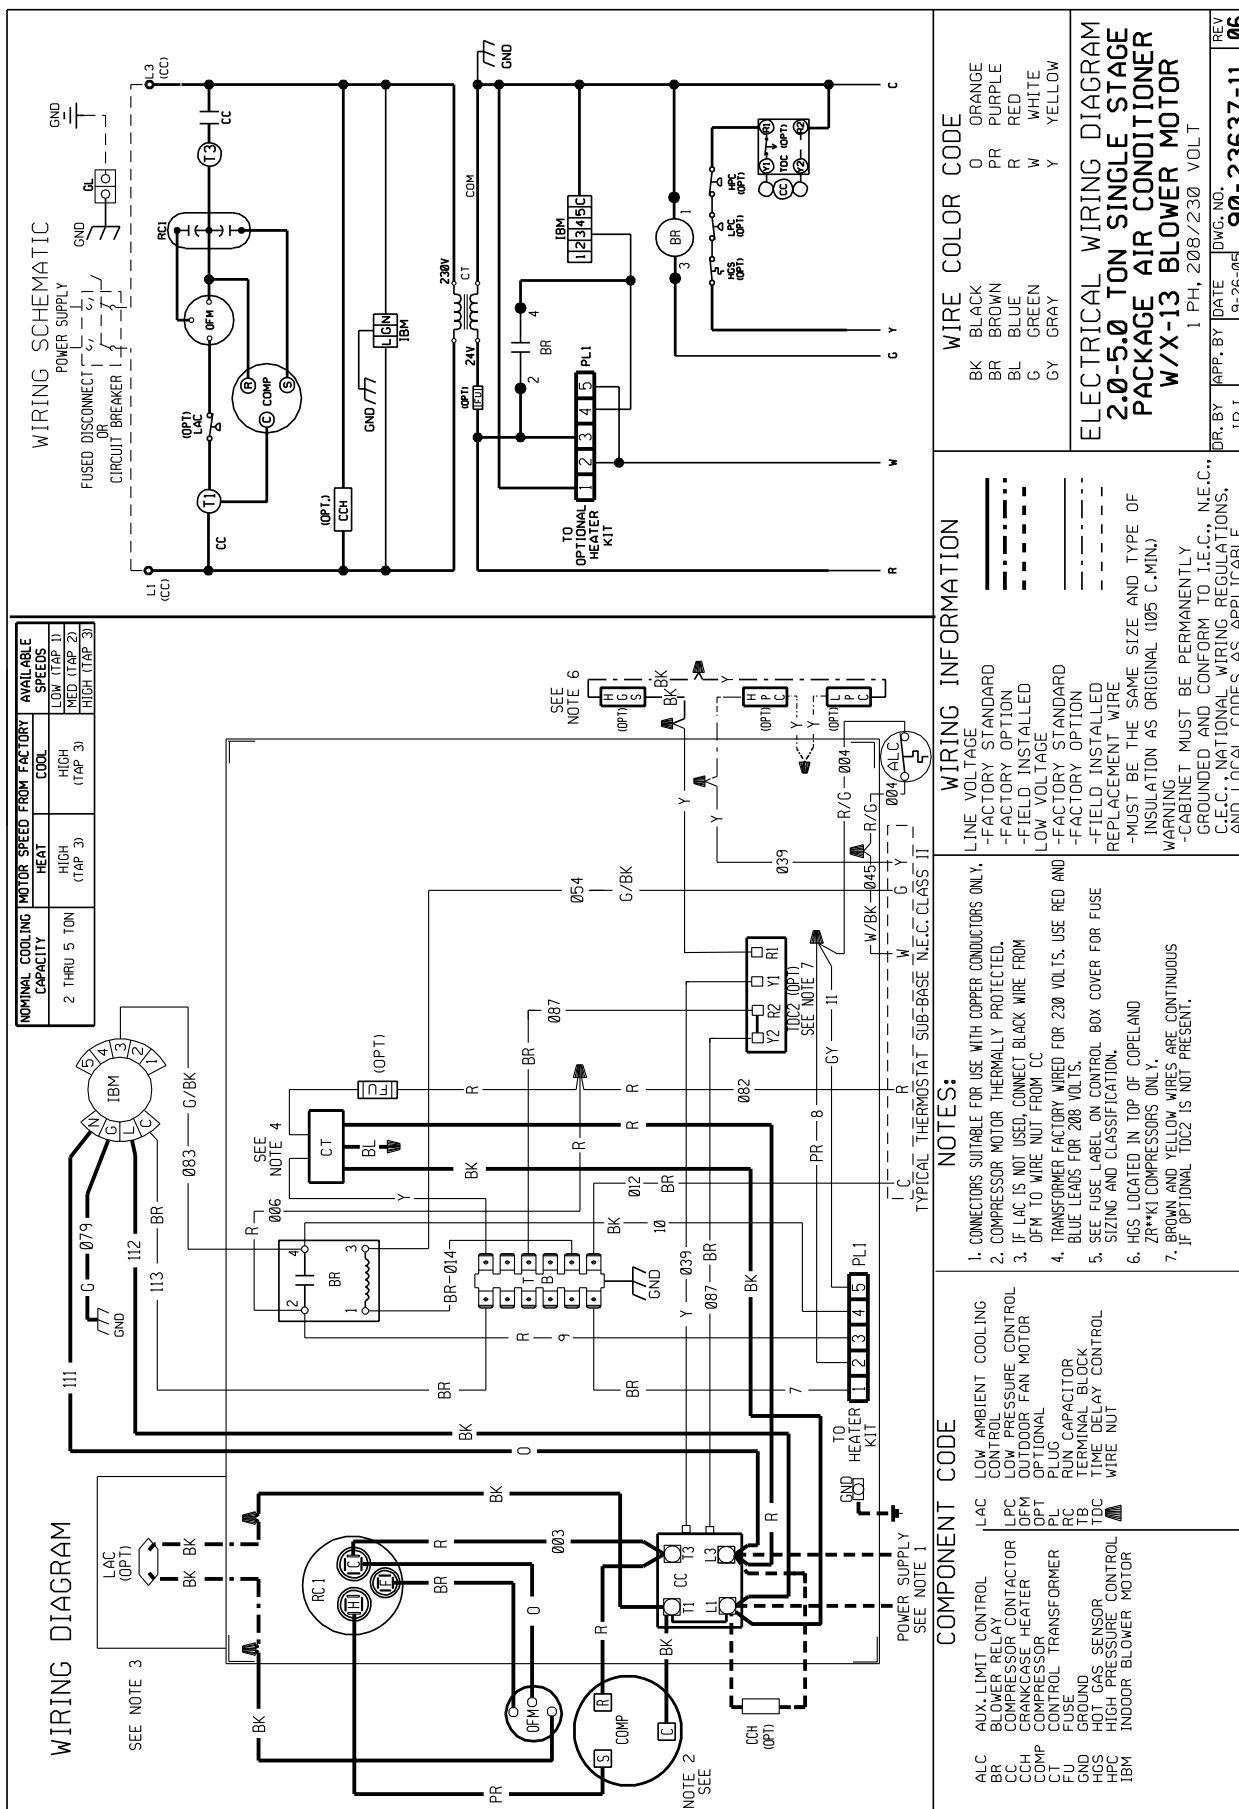



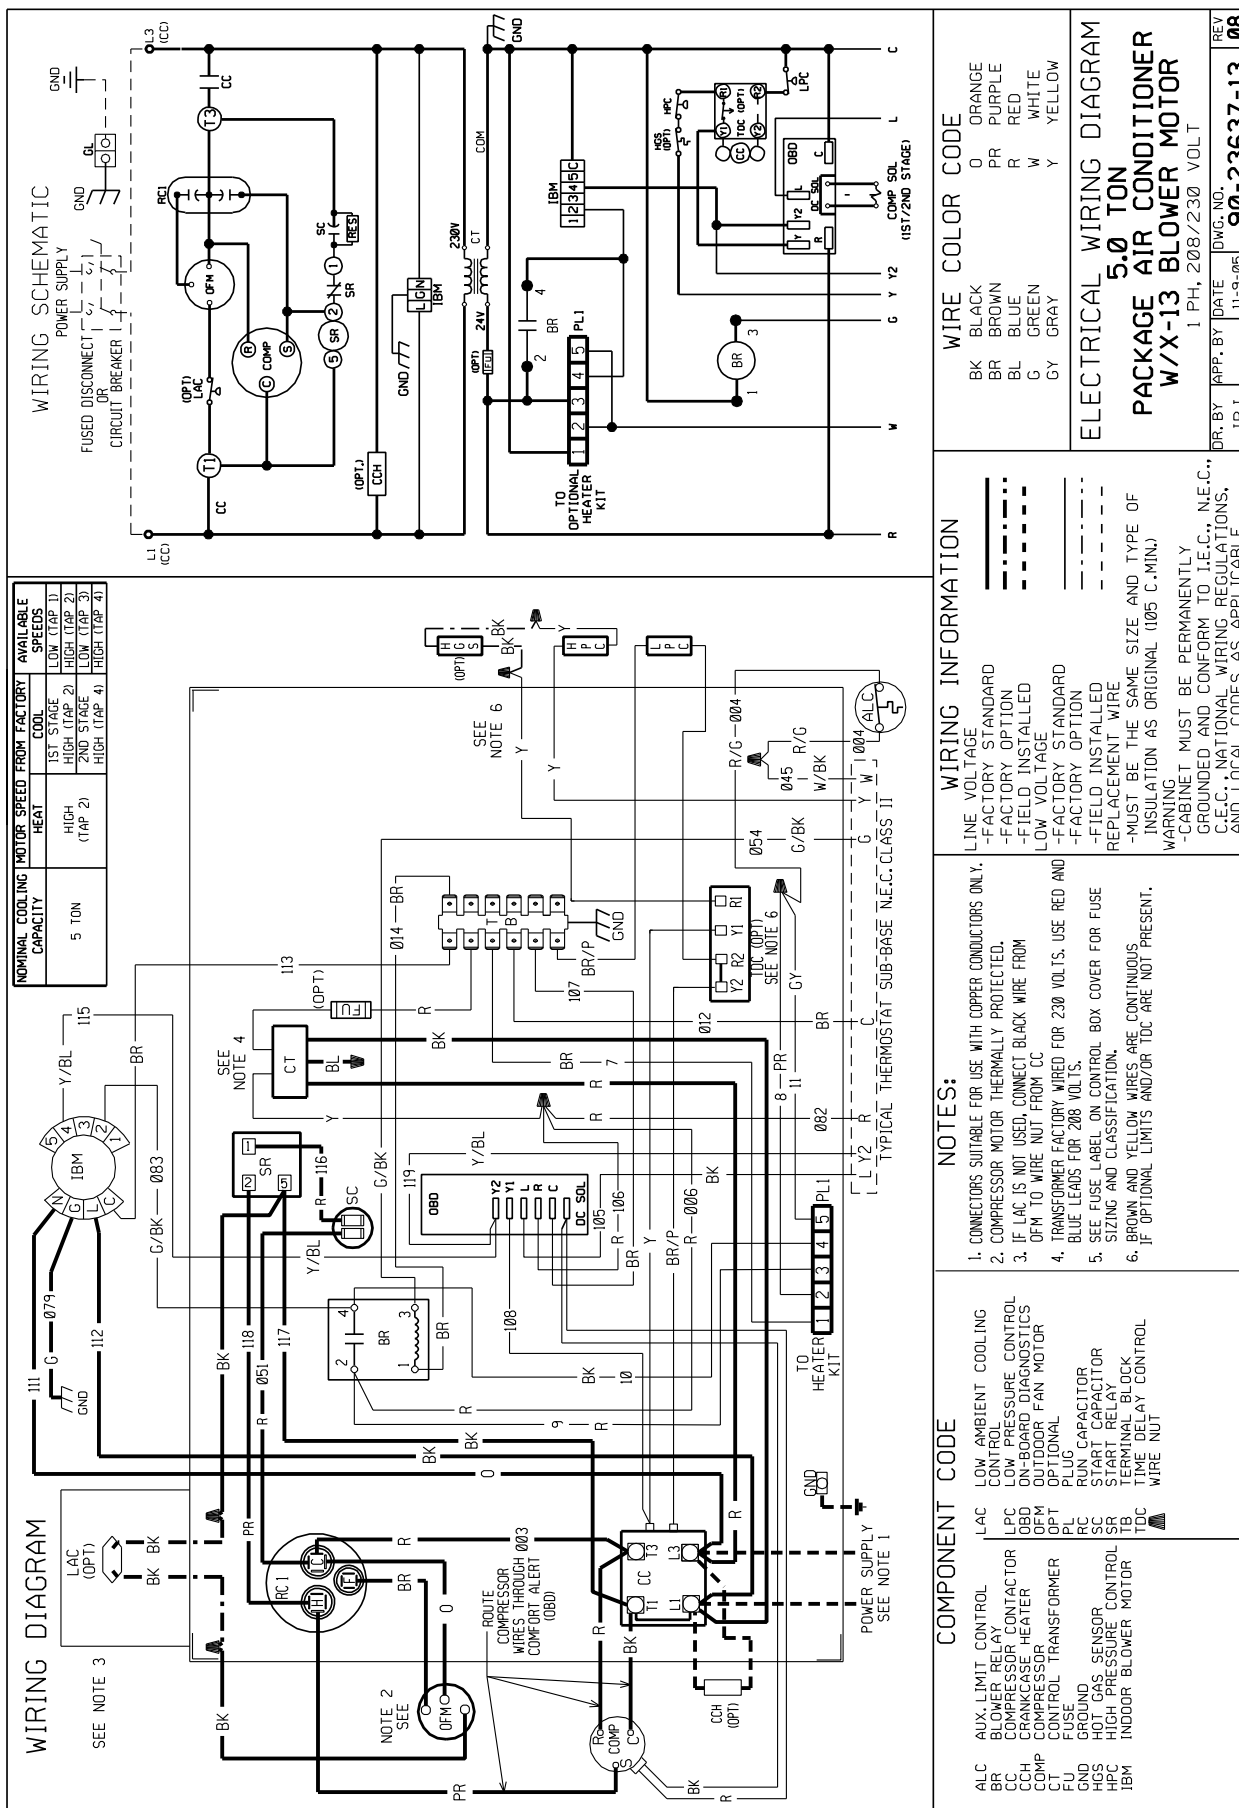






Air

SCHEMATIC DIAGRAM

MODEL	FACORY BLOWER SPEED
2.0 TON	HIGH
2.5 TON	LOW
3.0 TON	LOW

NOTE: BLOWER MOTOR WIRING CONNECTION SHOWN FOR LOW SPEED OPERATION. SEE TABLE AT RIGHT FOR FACTORY SPEED SETTING FOR THIS MODEL. REFER TO BLOWER AIR-FLOW PERFORMANCE CHART IN UNIT INSTALLATION INSTRUCTIONS BEFORE CHANGING FACTORY SPEED SETTING.

WIRING DIAGRAM

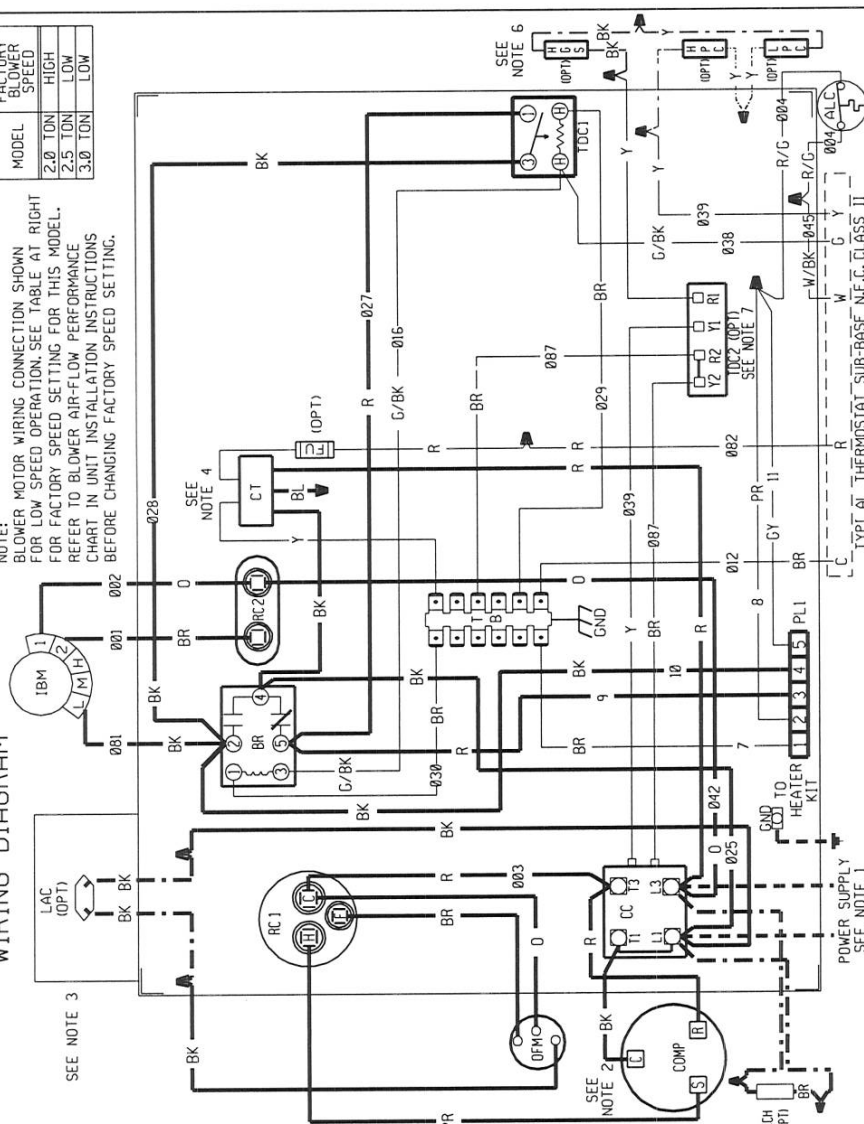

WIRE COLOR CODE
BK.....BLACK G.....GREEN PR.....PURPLE
BR.....BROWN GR.....GRAY R.....RED
BL.....BLUE O.....ORANGE W.....WHITE
Y.....YELLOW

ELECTRICAL WIRING DIAGRAM

2 - 3 TON

PACKAGE AIR CONDITIONER

W/PSC BLOWER MOTOR

1 PH, 208/230 VOLT

APPROVED	CHECKED	ORIGINAL RELEASE
<i>[Signature]</i>	<i>[Signature]</i>	
MODELED BY	DATE	NO.
ZJW	04-25-14	R-1059S013
PART NO.:	90-23637-20	REV: 00

COMPONENT CODES

LAC
LPC
OFM
OPT
PLUG
RUN CAPACITOR
TB
TDC
WIRE NUT


AUX. LIMIT CONTROL
BLOWER RELAY
CC
COMPRESSOR CONTACTOR
CRANKCASE HEATER
COMPRESSOR
CONTROL TRANSFORMER
CT
FUSE
GND
HGS
HOT GAS SENSOR
HIGH PRESSURE MOTOR

NOTES

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- IF LAC IS NOT USED, CONNECT BLACK WIRE FROM OFM TO WIRE NUT FROM CC
- TRANSFORMER FACTORY WIRED FOR 208 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- SEE FUSE LABEL ON CONTROL BOX COVER FOR FUSE SIZING AND CLASSIFICATION.
- HGS LOCATED IN TOP OF COPELAND 7R**1 COMPRESSORS ONLY.
- BROWN AND YELLOW WIRES ARE CONTINUOUS AND CONFORM TO I.E.C. WIRING CODES. G.C.C. IF OPTIONAL TDC IS NOT PRESENT.

WIRING INFORMATION

- LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
- LOW VOLTAGE
-FACTORY STANDARD
-FIELD INSTALLED
- REPLACEMENT WIRE
-MUST BE THE SAME SIZE AND TYPE
-OF INSULATION AS ORIGINAL (105C, MIN.)
- WARNING
-CABINET MUST BE PERMANENTLY GROUNDED
-AND CONFORM TO I.E.C. WIRING CODES.
-NATIONAL ELECTRICAL AND LOCAL
CODES AS APPLICABLE.

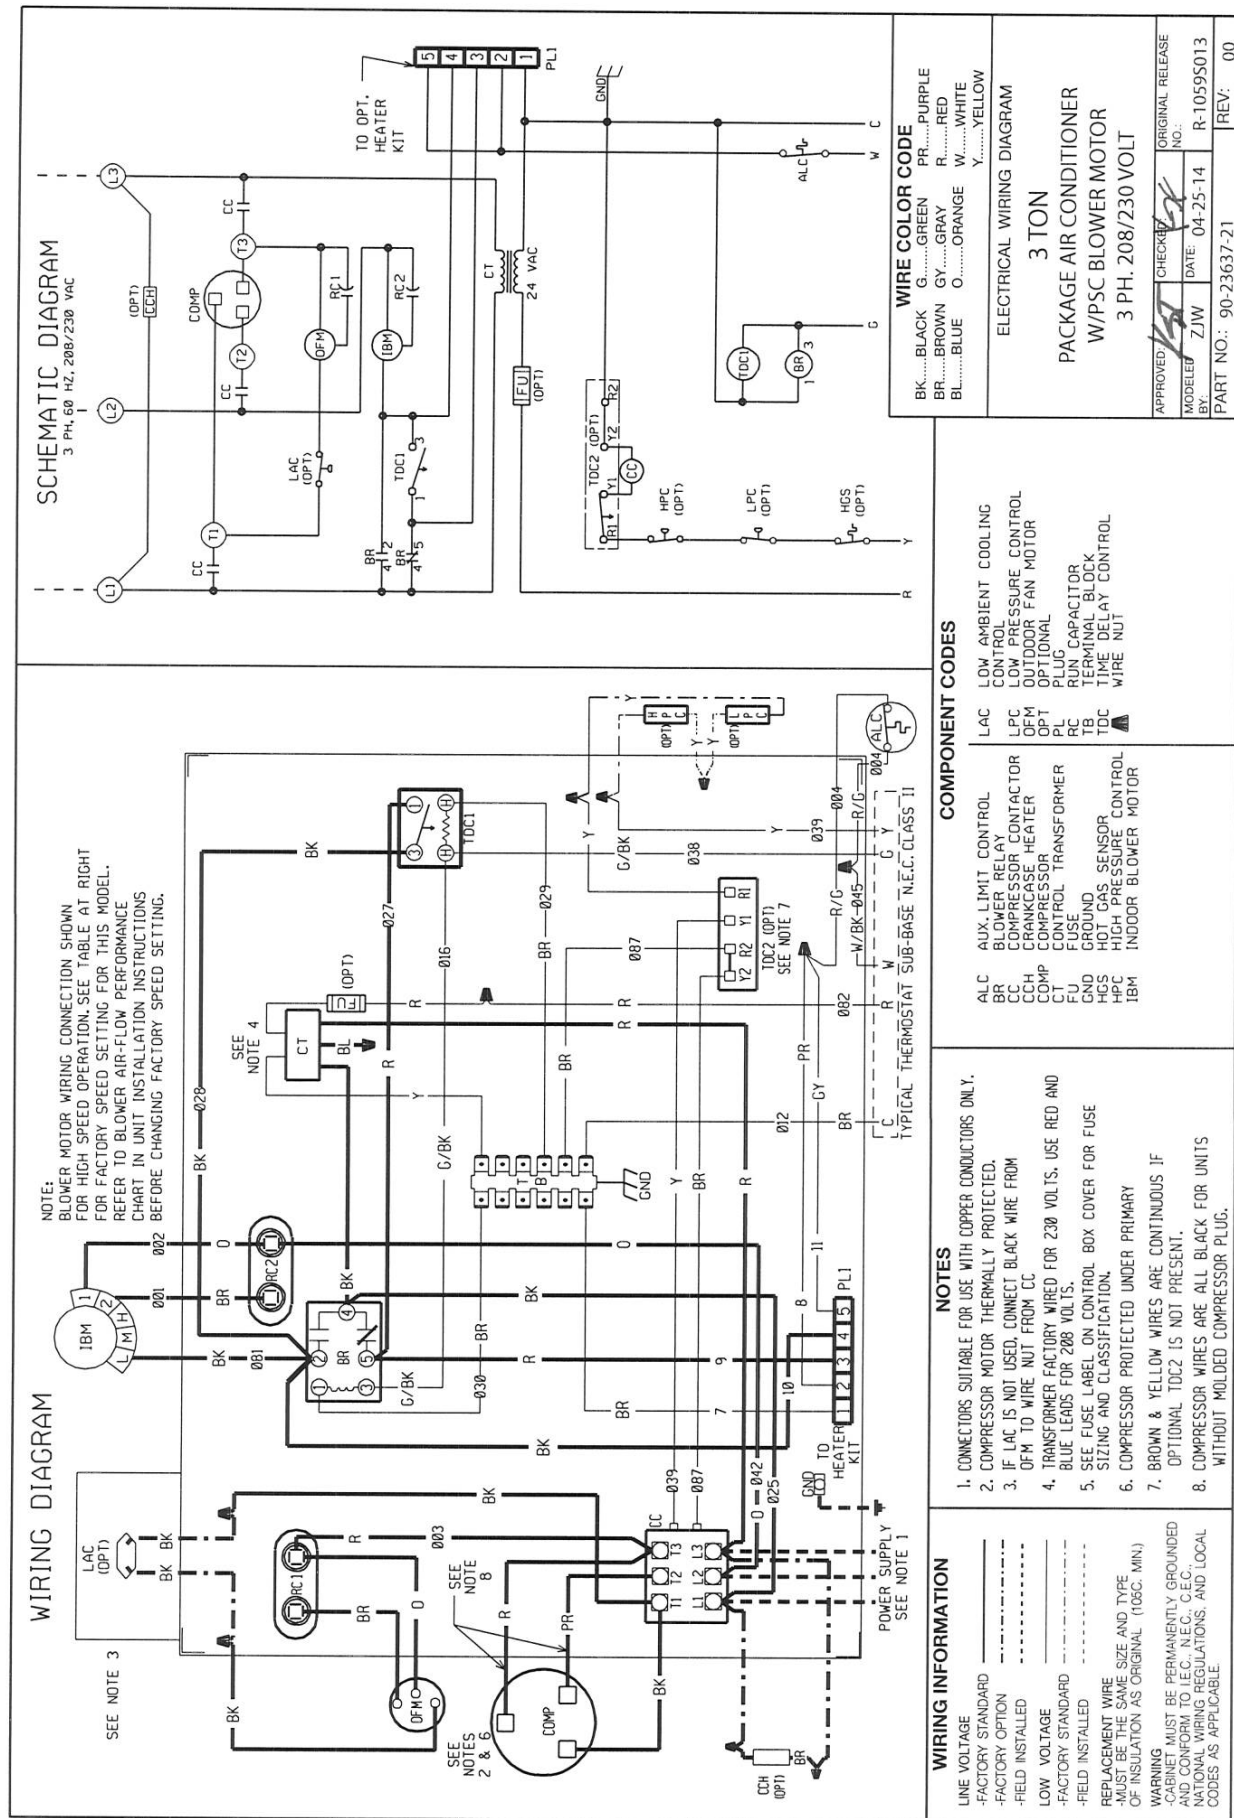

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts (Registration Required)

1 Phase, Residential Applications.....Ten (10) Years

Compressor

1 Phase, Residential Applications.....Ten (10) Years

1 & 3 Phase, Commercial Applications.....Five (5) Years

Parts

1 & 3 Phase, Commercial ApplicationsOne (1) Year



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED AIR & WATER

PRINTED IN U.S.A 08/14 QG FORM NO. S11-969