

80% AFUE GAS FURNACE

Multipoise Design

EcoTemp

WFEL



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



ISO 9001
QMI-SAI Global



UPFLOW/DOWNFLOW/HORIZONTAL (NATURAL GAS)

Model Number	Heat Exchangers	Input (MBTUH)	Efficiency AFUE	Cooling Capacity @ .5 in wc
WFEL045A036	20 year	44,000	80.0	3.0
WFEL045B042	20 year	44,000	80.0	3.5
WFEL070B036	20 year	66,000	80.0	3.0
WFEL070B048	20 year	66,000	80.0	4.0
WFEL070C054	20 year	66,000	80.0	4.5
WFEL090B042	20 year	88,000	80.0	3.5
WFEL090C048	20 year	88,000	80.0	4.0
WFEL090C060	20 year	88,000	80.0	5.0
WFEL090D066	20 year	88,000	80.0	5.0
WFEL110C060	20 year	110,000	80.0	5.0
WFEL110D066	20 year	110,000	80.0	5.5
WFEL135D060	20 year	132,000	80.0	5.0

STANDARD FEATURES

- Four-position furnace: upflow, horizontal right, horizontal left, downflow
- Cabinet air leakage less than 2.0% at 1.0 in. W.C. and cabinet air leakage less than 1.4% at 0.5 in. W.C. when tested in accordance with ASHRAE standard 193
- Electronic control center
- Adjustable heating air temperature rise, LED diagnostics and self test feature
- Hot Surface Ignition (HSI)
- WFEL – Low NOx units are designed for California installations and meet 40 ng/J NOx emissions. Can be installed in air quality management districts with a 40 ng/J NOx emissions requirement.
- Cabinet air leakage less than 2.0% at 1.0 in. w.c. and cabinet air leakage less than 1.4% at 0.5 in. w.c. when tested in accordance with ASHRAE standard 193

LIMITED WARRANTY*

- 1 year unit replacement limited warranty
- 20 year heat exchanger limited warranty
- 10 year parts limited warranty with timely registration
- 5 years parts limited warranty if not registered within 90 days of original installation

* For residential applications only. See warranty certificate for complete details and restrictions, including warranty coverage for other applications.

Product Specifications

NOMENCLATURE IDENTIFICATION GUIDE

DIGIT POSITION	1, 2	3	4	5, 6, 7	8	9, 10, 11	12	13
	WF	E	L	045	A	024	B	1
WF = Gas Furnace		E, M = Mid EFFICIENCY	L = Low NOx FEATURE	045 = 44,000 070 = 66,000 090 = 88,000 110 = 110,000 135 = 132,000 HEATING INPUT, MBTUH	A= 14½" B = 17½" C = 21" D = 24½" CABINET WIDTH, Inches	24 = 24,000 BTU/hr, 2 Ton 30 = 30,000 BTU/hr, 2½ Ton 36 = 36,000 BTU/hr, 3 Ton 48 = 48,000 BTU/hr, 4 Ton 54 = 54,000 BTU/hr, 4.5 Ton 60 = 60,000 BTU/hr, 5 Ton COOLING SIZE		
E, M = Mid								
L = Low NOx								
045 = 44,000 070 = 66,000 090 = 88,000 110 = 110,000 135 = 132,000								
A= 14½"								
B = 17½"								
C = 21"								
D = 24½"								
24 = 24,000 BTU/hr, 2 Ton								
30 = 30,000 BTU/hr, 2½ Ton								
36 = 36,000 BTU/hr, 3 Ton								
48 = 48,000 BTU/hr, 4 Ton								
54 = 54,000 BTU/hr, 4.5 Ton								
60 = 60,000 BTU/hr, 5 Ton								
SALES DIGIT								
EXTRA DIGIT								

ACCESSORIES PART NUMBER IDENTIFICATION GUIDE

DIGIT POSITION	1	2	3	4	5, 6, 7	8, 9	10, 11						
	N	A	H	A	001	01	DH						
N = Non-Branded BRANDING		A = Accessory PRODUCT GROUP	H = Heating KIT USAGE	A = Original B = 2nd Generation MAJOR SERIES									
Product Identifier Number													
Package Quantity													
Type of Kit (Example: DH = Draft Hood – Chimney Adapter)													

For California Residents:

For installation in SCAQMD only: This furnace does not meet the SCAQMD Rule 1111 14 ng/J NOx emission limit, and thus is subject to a mitigation fee of up to \$450. This furnace is not eligible for the Clean Air Furnace Rebate Program: www.CleanAirFurnaceRebate.com

SPECIFICATIONS							
WFEL		045A036	045B042	070B036	070B048	070B054	090C042
RATING AND PERFORMANCE							
Input Btuh*	Upflow	44,000	44,000	66,000	66,000	66,000	88,000
	Hz/Downflow	42,000	42,000	63,000	63,000	63,000	84,000
Output Capacity (Btuh) Nonweatherized ICS†	Upflow	36,000	35,000	54,000	54,000	53,000	71,000
	Hz/Downflow	34,000	34,000	51,000	51,000	51,000	68,000
AFUE‡		80.0					
Certified Temperature Rise Range °F		30–60	30–60	35–65	25–55	25–55	40–70
°C		17–33	17–33	19–36	14–31	14–31	22–39
External Static Pressure	Heating	.10	.10	.12	.12	.15	.15
	Cooling	.50	.50	.50	.50	.50	.50
Airflow CFM‡	Heating	710	760	982	1205	1305	1203
	Cooling	1080	1215	1005	1435	1545	1210
ELECTRICAL							
Transformer (24v)		40VA					
External Control	Heating	12VA					
	Cooling	35VA					
Air Conditioning Blower Relay		Standard					
CONTROLS							
Limit Control		SPST					
Heating Blower Control		Solid–State Timer Operation					
Burners (Monoport)		2	2	3	3	4	4
Gas Connection Size		1/2 inch NPT					
GAS CONTROLS							
Gas Valve (Redundant)		White Rodgers					
Min Inlet Pressure (in wc/kPa)		4.5/1.121 (Natural Gas)					
Max inlet pressure (in wc/kPa)		13.6/3.386 (Natural Gas)					
Ignition Device		Hot Surface					
BLOWER DATA							
Direct–Drive Motor HP (ECM)		1/3	1/2	1/3	3/4	3/4	1/2
Motor Full Load Amps		4.4	6.4	4.4	8.8	8.8	6.8
RPM (Nominal) speeds		1050–5	1050–5	1050–5	1050–5	1050–5	1050–5
Blower Wheel Diameter x Width – inches(mm)		10 x 6 (254 x 152)	10 x 8 (254 x 203)	11 x 8 (279 x 203)	11 x 8 (279 x 203)	10 x 10 (254 x 254)	11 x 8 (279 x 203)
FILTER ARRANGEMENT		External Filter Rack Required					

* Gas input ratings are certified for elevations to 2000 ft. (609.6 m) For elevations about 2000 ft. (609.6 m), reduce ratings 4% for each 1000 ft. (304.8m) above sea level. Refer to national Fuel Gas Code Table F4 or furnace Installation Instructions. In Canada, derate the unit 10% for elevations 2000 ft. (609.6 m) to 4500 ft. (1371.6 m) above sea level.

† Capacity in accordance with U.S. Government DOE test procedures.

‡ Airflow shown is for bottom only return–air supply for the as–shipped speed tap. For air delivery above 1800 CFM, see Air Delivery table for other options. A filter is required for each return air supply. An airflow reduction of up to 7% may occur when using the factory specified 4–5/16 inch (109.5 mm) wide, high efficiency media filter.

** Time delay type is recommended.

ICS Isolated Combustion System

N/A Not Applicable

SPECIFICATIONS (CONT.)

WFEL		090C048	090C060	090D066	110C060	110D066	135D060
RATING AND PERFORMANCE							
Input Btuh*	Upflow	88,000	88,000	88,000	110,000	110,000	132,000
	Hz/Downflow	84,000	84,000	84,000	105,000	105,000	126,000
Output Capacity (Btuh) Nonweatherized ICS†	Upflow	71,000	71,000	72,000	90,000	90,000	107,000
	Hz/Downflow	68,000	68,000	69,000	85,000	86,000	102,000
AFUE‡		80.0					
Certified Temperature Rise Range °F		35–65	25–55	30–60	30–60	30–60	40–70
°C		19–36	14–31	17–33	17–33	17–33	22–39
External Static Pressure	Heating	.15	.15	.12	.20	.20	.20
	Cooling	.50	.50	.50	.50	.50	.50
Airflow CFM‡	Heating	1418	1650	1565	1890	1930	1760
	Cooling	1445	1980	1960	2040	2005	1810
ELECTRICAL							
Transformer (24v)		40VA					
External Control	Heating	12VA					
	Cooling	35VA					
Air Conditioning Blower Relay		Standard					
CONTROLS							
Limit Control		SPST					
Heating Blower Control		Solid–State Timer Operation					
Burners (Monoport)		4	4	4	5	5	6
Gas Connection Size		1/2 inch NPT					
GAS CONTROLS							
Gas Valve (Redundant)		White Rodgers					
Min Inlet Pressure (in wc/kPa)		4.5/1.121 (Natural Gas)					
Max inlet pressure (in wc/kPa)		13.6/3.386 (Natural Gas)					
Ignition Device		Hot Surface					
BLOWER DATA							
Direct–Drive Motor HP(ECM)		1/2	1	3/4	1	3/4	3/4
Motor Full Load Amps		6.8	11.5	8.8	11.5	8.8	8.8
RPM (Nominal) speeds		1050–5	1050–5	1050–5	1050–5	1050–5	1050–5
Blower Wheel Diameter x Width – inches(mm)		10 x 10 (254 x 254)	11 x 11 (279 x 279)	11 x 11 (279 x 279)	11 x 11 (279 x 279)	11 x 11 (279 x 279)	11 x 11 (279 x 279)
FILTER ARRANGEMENT		External Filter Rack Required					

- * Gas input ratings are certified for elevations to 2000 ft. (609.6 m) For elevations about 2000 ft. (609.6 m), reduce ratings 4% for each 1000 ft. (304.8m) above sea level. Refer to national Fuel Gas Code Table F4 or furnace Installation Instructions. In Canada, derate the unit 10% for elevations 2000 ft. (609.6 m) to 4500 ft. (1371.6 m) above sea level.
- † Capacity in accordance with U.S. Government DOE test procedures.
- ‡ Airflow shown is for bottom only return-air supply for the as-shipped speed tap. For air delivery above 1800 CFM, see Air Delivery table for other options. A filter is required for each return air supply. An airflow reduction of up to 7% may occur when using the factory specified 4-5/16 inch (109.5 mm) wide, high efficiency media filter.
- ** Time delay type is recommended.
- ICS Isolated Combustion System
- N/A Not Applicable

ELECTRICAL DATA



FURNACE MODEL	Volts-Hertz-Phase	Operating Voltage* Range		Maximum Unit Amps	Unit Ampacity#	Minimum Wire Size AWG	Maximum Wire Length‡ ft (m)		Maximum Fuse or CKT BKR† Amps
		Maximum	Minimum						
045A036	115-60-1	127	104	5.6	7.8	14.0	47.0	(14.3)	15.0
045B042	115-60-1	127	104	7.6	10.3	14.0	36.0	(11.3)	15.0
070B036	115-60-1	127	104	5.6	7.8	14.0	47.0	(14.3)	15.0
070B048	115-60-1	127	104	10.0	13.3	14.0	27.0	(8.2)	15.0
070C054	115-60-1	127	104	10.0	13.3	14.0	27.0	(8.2)	15.0
090B042	115-60-1	127	104	8.2	11.0	14.0	33.0	(10.1)	15.0
090C048	115-60-1	127	104	8.2	11.0	14.0	33.0	(10.1)	15.0
090C060	115-60-1	127	104	12.9	16.9	12.0	33.0	(10.1)	20.0
090D066	115-60-1	127	104	10.2	13.6	14.0	27.0	(8.2)	15.0
110C060	115-60-1	127	104	13.4	17.4	12.0	33.0	(10.1)	20.0
110D066	115-60-1	127	104	10.9	14.2	14.0	26.0	(7.9)	15.0
135D060	115-60-1	127	104	10.7	14.0	14.0	26.0	(7.9)	15.0

- * Permissible limits of the voltage range at which the unit operates satisfactorily.
- # Unit ampacity = 125 percent of largest operating component's full load amps plus 100 percent of all other potential operating components' (EAC, humidifier, etc.) full load amps.
- † Time-delay type is recommended.
- ‡ Length shown is as measured 1 way along wire path between unit and service panel for maximum 2 percent voltage drop.

UNIT DIMENSIONS

Part Number	50493-4	Rev	1
Rev	1	7	1

- NOTES:**
- Doors may vary by model.
 - Two additional 7/8-in. (22 mm) diameter holes are located in the top plate.
 - Minimum return-air openings at furnace, based on metal duct. If flex duct is used, see flex duct manufacturer's recommendations for equivalent diameters.
 - For 800 CFM-16-in. (406 mm) round or 14 1/2 x 12-in. (368 x 305 mm) rectangle.
 - For 1200 CFM-20-in. (508 mm) round or 14 1/2 x 19 1/2-in. (368 x 495 mm) rectangle.
 - For 1600 CFM-22-in. (559 mm) round or 14 1/2 x 22 1/16-in. (368 x 560mm) rectangle.
 - Return air above 1800 CFM may require one of the following configurations:
 - Return air above 1800 CFM may require one of the following configurations: 2 sides, 1 side and a bottom or bottom only for return air. See Air Delivery table in this document for specific use to allow for sufficient airflow to the furnace.


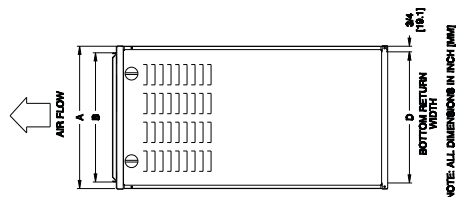
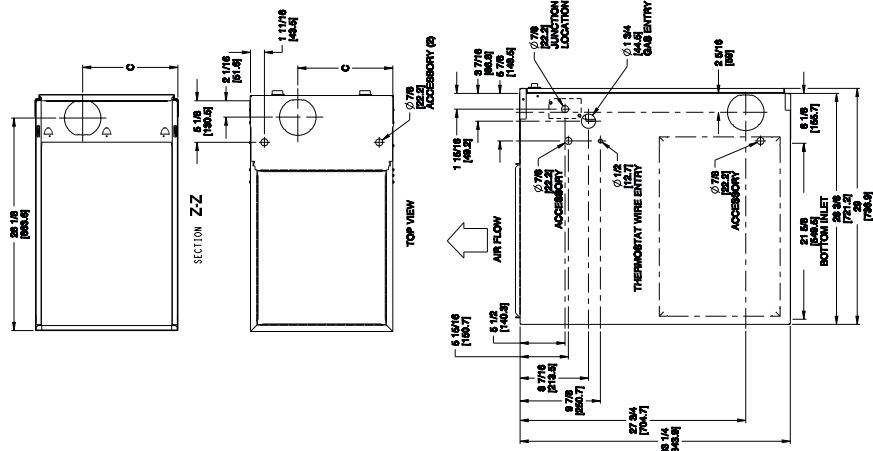


A180206




FURNACE SIZE	A	B	C	D	VENT CONNECTION SIZE* IN. (MM)	SHIP WT (LB / KG)
	CABINET WIDTH IN. (MM)	OUTLET WIDTH IN. (MM)	TOP AND BOTTOM FLUE COLLAR IN. (MM)	BOTTOM WIDTH IN. (MM)		
045A036	14-3/16 (360)	12-9/16 (319)	9-5/16 (237)	12-11/16 (322)	4 (102)	104 (47)
045B042	17-1/2 (445)	15-7/8 (403)	11-9/16 (294)	16 (406)	4 (102)	119 (64)
070B036	17-1/2 (445)	15-7/8 (403)	11-9/16 (294)	16 (406)	4 (102)	126 (57)
070B048	17-1/2 (445)	15-7/8 (403)	11-9/16 (294)	16 (406)	4 (102)	126 (57)
070C054	21 (533)	19-3/8 (492)	13-5/16 (338)	19-1/2 (495)	4 (102)	129 (59)
090B042	17-1/2 (445)	15-7/8 (403)	11-9/16 (294)	16 (406)	4 (102)	127 (58)
090C048	21 (533)	19-3/8 (492)	13-5/16 (338)	19-1/2 (495)	4 (102)	140 (64)
090C060	21 (533)	19-3/8 (492)	13-5/16 (338)	19-1/2 (495)	4 (102)	140 (64)
090D066	24-1/2 (622)	22-7/8 (581)	15-1/16 (383)	23 (584)	4 (102)	134 (61)
110C060	21 (533)	19-3/8 (492)	13-5/16 (338)	19-1/2 (495)	4 (102)	152 (69)
110D066	24-1/2 (622)	22-7/8 (581)	15-1/16 (383)	23 (584)	4 (102)*	161 (73)
135D060	24-1/2 (622)	22-7/8 (581)	15-1/16 (383)	23 (584)	4 (102)*	163 (74)

* 135 size furnaces require a 5 in. or 6 in. (127 or 152 mm) vent. Use a vent adapter between furnace and vent stack.




DOWNFLOW VENT CONFIGURATIONS

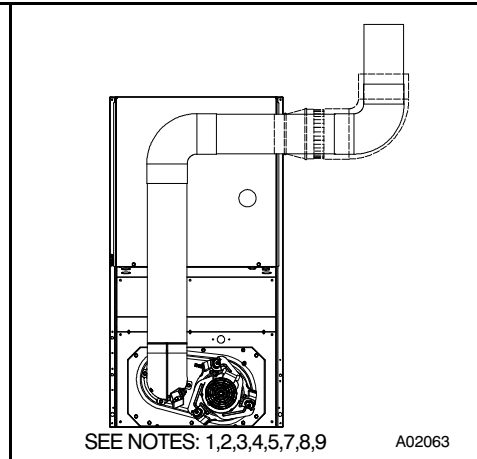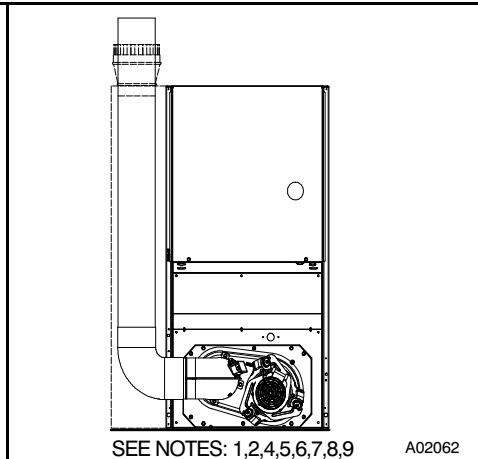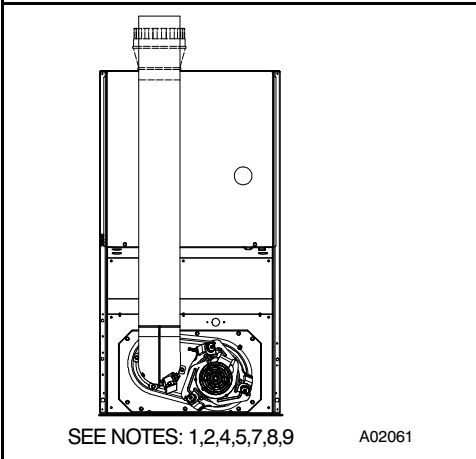




DOWNFLOW CONTINUED

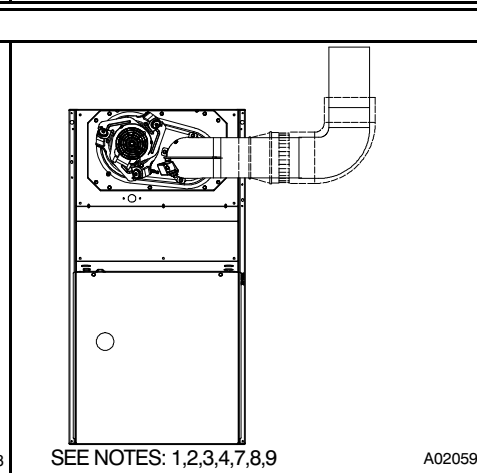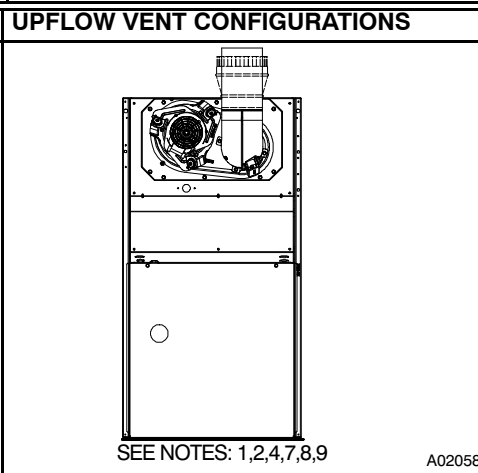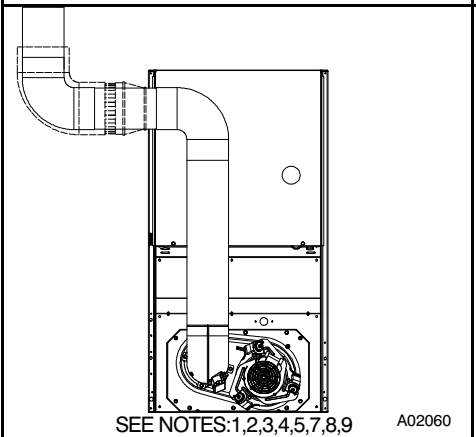


HORIZONTAL RIGHT VENT CONFIGURATIONS

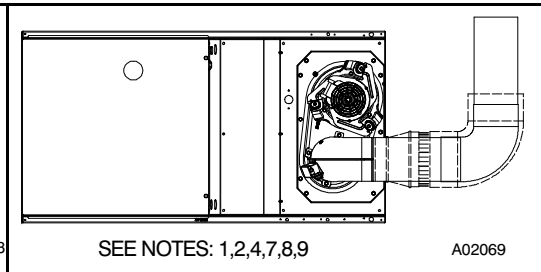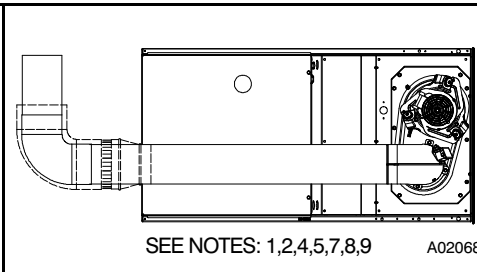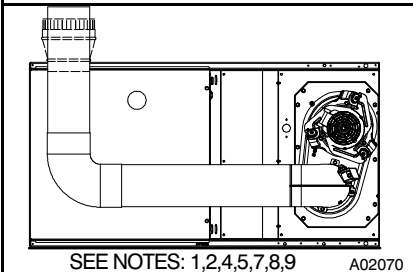

HORIZONTAL LEFT VENT CONFIGURATIONS

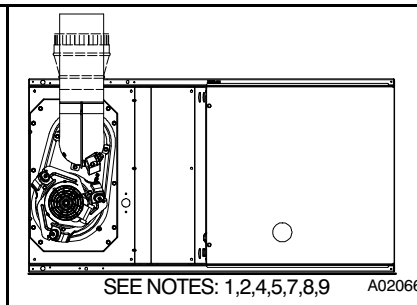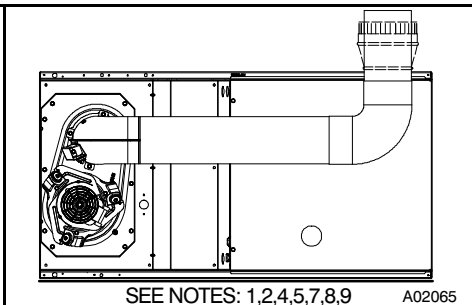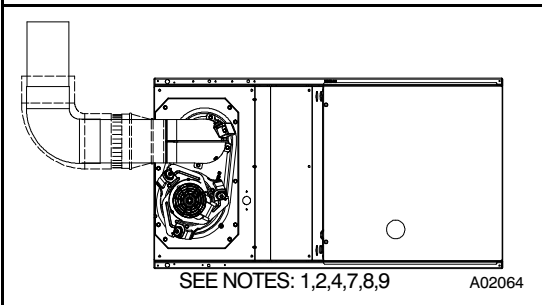

HORIZONTAL LEFT VENT CONFIGURATIONS

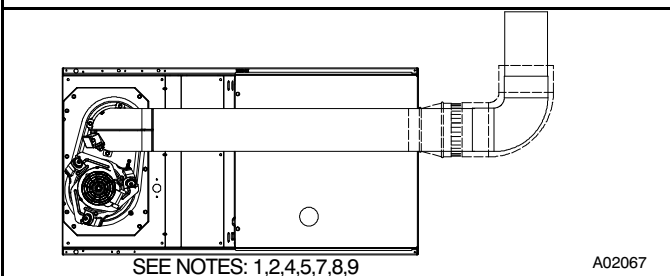

Venting notes

1. For common vent, vent connector sizing and vent material: United States, use the latest edition of the National Fuel Gas Code (NFGC).
2. Immediately increase to 5 inch (127mm) vent connector outside furnace casing when 5 inch (127mm) vent connector required, refer to Note 1.
3. Side outlet vent for upflow and downflow installations must use Type B vent immediately after exiting the furnace, except when the Downflow Vent Guard Kit is used in downflow position.
4. Type B vent where required, refer to Note 1.
5. 4 inch (102 mm) single-wall (26 ga. min.) vent must be used inside furnace casing and when the Downflow Vent Guard Kit is used external to the furnace.
6. Accessory Downflow Vent Guard Kit, required in downflow installations with lower vent configuration.
7. Chimney Adapter Kit may be required for exterior masonry chimney applications. Refer to Chimney Adapter Kit for sizing and complete application details.
8. Secure vent connector to furnace elbow with two (2) corrosion-resistant sheet metal screws, space approximately 180° apart.
9. Secure all other single wall vent connector joints with three (3) corrosion-resistant screws spaced approximately 120° apart. secure Type B vent connectors per vent connector manufacturer's recommendations.

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS FOR ALL UNITS

This forced air furnace is equipped for use with natural gas at altitudes 0 – 10,000 ft (0 – 3,050m).

An accessory kit, supplied by the manufacturer, shall be used to convert to propane gas use or may be required for some natural gas applications.

This furnace is for indoor installation in a building constructed on site.


The furnace may be installed on combustible flooring in alcove or closet at minimum clearance as indicated by the diagram from combustible material.

This furnace may be used with a Type B-1 Vent and may be vented in common with other gas fired appliances.

This furnace is approved for UPFLOW, DOWNFLOW, and HORIZONTAL installations.

Downflow Positions:

- † Installation on non-combustible floors only.
For Installation on combustible flooring only when installed on special base or coil assembly.
- Ø 18 inch front clearance required for alcove.
- * Indicate supply or return sides when furnace is in the horizontal position. Line contact only permissible between lines formed by intersections of the Top and two Sides of the furnace jacket, and building joists, studs or framing.

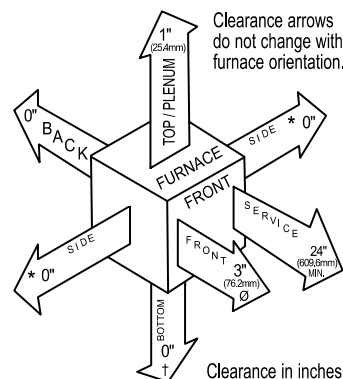

Vent Clearance to combustibles:

- For Single Wall vents 6 inches (6 po).
- For Type B-1 vent type 1 inch (1 po).

AIR DELIVERY-CFM (WITH FILTER)*

UNIT SIZE	WIRE-LEAD COLOR	SPEED	Test Airflow Delivery @ Various External Static Pressures (in. w.c.)									
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
045A036	Gray	5	1230	1190	1155	1120	1080	1045	1010	975	935	895
	Yellow	4	980	945	920	890	855	815	770	735	690	645
	Orange	3	770	720	685	640	600	560	520	475	430	385
	Blue	2	710	660	620	580	540	490	455	415	375	335
	Red	1	600	540	500	455	415	385	345	305	235	--
045B042	Gray	5	1370	1335	1295	1255	1215	1175	1135	1095	1055	1020
	Yellow	4	1130	1085	1040	995	955	910	865	825	780	730
	Blue	3	760	720	670	625	580	515	460	410	355	300
	Orange	2	930	885	835	795	745	700	655	600	545	495
	Red	1 ³	610	500	445	375	320	260	200	135	--	--
070B036	Gray	5	1185	1140	1095	1055	1005	960	915	865	820	780
	Yellow	4	1000	940	895	850	800	750	695	650	600	555
	Blue	3	990	935	895	845	790	740	690	640	590	535
	Orange	2	855	775	720	660	605	560	495	435	385	335
	Red	1	860	685	515	445	385	340	275	205	--	--

AIR DELIVERY-CFM (WITH FILTER)* (CONT.)

UNIT SIZE	WIRE-LEAD COLOR	SPEED	Test Airflow Delivery @ Various External Static Pressures (in. w.c.)									
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
070B048	Gray	5	1610	1565	1525	1475	1435	1395	1350	1305	1260	1215
	Yellow	4	1385	1335	1290	1250	1205	1165	1125	1075	1025	980
	Blue	3	1215	1165	1120	1075	1035	985	940	895	845	840
	Orange	2	1175	1130	1085	1035	990	945	900	855	805	760
	Red	1	1080	1015	955	920	875	820	780	725	670	620
070C054	Gray	5	1735	1685	1640	1595	1545	1495	1450	1405	1360	1310
	Yellow	4	1480	1435	1395	1340	1290	1240	1190	1135	1085	1030
	Blue	3	1315	1275	1225	1180	1135	1085	1030	975	915	860
	Orange	2	1135	1080	1030	985	935	885	835	770	705	645
	Red	1 ³	980	930	875	820	775	715	665	595	530	455
090B042	Gray	5	1355	1320	1285	1245	1210	1165	1125	1080	1025	815
	Yellow	4	1295	1255	1220	1185	1140	1100	1055	1005	955	815
	Blue	3	1220	1185	1150	1105	1065	1025	975	915	840	740
	Orange	2	1030	985	940	900	845	790	715	655	590	535
	Red	1 ³	945	905	855	800	750	670	600	540	490	435
090C048	Gray	5	1625	1580	1535	1490	1445	1395	1340	1260	1135	995
	Blue	4	1440	1395	1350	1305	1255	1200	1145	1090	1040	950
	Yellow	3	1425	1380	1335	1290	1235	1185	1125	1075	1020	940
	Orange	2	1260	1210	1160	1105	1050	990	935	880	820	755
	Red	1 ³	1095	1040	980	905	845	780	720	650	585	520
090C060	Gray	5	2180	2130	2080	2030	1980	1925	1870	1805	1745	1680
	Yellow	4	1900	1845	1795	1740	1685	1635	1570	1500	1435	1375
	Blue	3	1685	1620	1565	1505	1455	1385	1320	1260	1200	1140
	Orange	2	1390	1315	1240	1175	1095	1030	970	900	825	760
	Red	1 ³	1240	1155	1075	990	915	835	765	690	615	555
090D066	Gray	5	2190	2135	2075	2015	1960	1900	1835	1775	1705	1630
	Yellow	4	1870	1810	1745	1685	1625	1565	1495	1420	1345	1280
	Blue	3	1580	1510	1445	1385	1320	1240	1175	1115	1050	970
	Orange	2	1305	1220	1160	1075	1000	930	865	770	690	610
	Red	1 ³	1210	1075	1000	915	845	765	675	595	515	425
110C060	Gray	5	2255	2205	2150	2100	2040	1985	1920	1835	1735	1615
	Yellow	4	1600	1525	1465	1400	1335	1275	1210	1150	1080	1015
	Blue	3	1945	1890	1830	1770	1715	1655	1600	1545	1480	1430
	Orange	2	1420	1340	1280	1200	1140	1065	1005	925	865	790
	Red	1	1280	1205	1140	1055	990	910	840	760	695	630
110D066	Gray	5	2250	2190	2130	2070	2005	1950	1885	1820	1755	1685
	Yellow	4	1540	1460	1385	1305	1235	1165	1095	1035	955	890
	Blue	3	1995	1930	1865	1800	1740	1670	1605	1535	1465	1400
	Orange	2	1345	1195	1135	1055	980	920	845	770	695	620
	Red	1 ³	1335	1075	965	890	820	735	660	580	505	440
135D060	Gray	5	2065	2005	1940	1875	1810	1740	1670	1600	1530	1470
	Blue	4	1825	1760	1695	1630	1560	1490	1420	1350	1275	1205
	Yellow	3	1760	1690	1625	1555	1485	1415	1345	1275	1200	1130
	Orange	2	1620	1550	1480	1405	1335	1260	1195	1130	1065	995
	Red	1 ³	1325	1260	1185	1100	1025	955	885	805	735	670

NOTES:

1. A filter is required for each return-air inlet. Airflow performance includes a 3/4 in. (19 mm) washable filter media such as contained in factory-authorized accessory filter rack. See accessory list. To determine airflow performance without this filter, assume an additional 0.1 in. W.C. available external static pressure.
2. **ADJUST THE BLOWER SPEED TAPS AS NECESSARY FOR THE PROPER AIR TEMPERATURE RISE FOR EACH INSTALLATION.**

3. Highlighted areas indicate airflow range is beyond the range allowed for heating. THESE AIRFLOW RANGES MAY ONLY BE USED FOR COOLING.

-- Indicates unstable operating conditions.

ACCESSORIES							
PART NUMBER	DESCRIPTION	045A036	045B042	070B036	070B048	070C054	090B042
NAHB00501FF	External Bottom Filter Rack, 14 inch (14 x 25 inch washable filter included)	X					
NAHB00601FF	External Bottom Filter Rack, 17 inch (16 x 25 inch washable filter included)		X	X	X		X
NAHB00701FF	External Bottom Filter Rack, 21 inch (20 x 25 inch washable filter included)					X	
NAHA00506FB†	Washable filter, 1 inch – 16 x 25 (6 pack)	X	X	X	X		X
NAHA00706FB	Washable filter, 1 inch – 24 x 25 (6 pack)					X	
NAHA01101SB	Combustible Floor Base (Not required when evaporator coil case is used for downflow)	X	X	X	X	X	X
NAHB00301VC	Downflow Vent Guard (Not required when vent is routed through cabinet)	X	X	X	X	X	X
NAHA00401DH	Chimney Adapter Kit 4-in. vent	X	X	X	X	X	X
NAHD00901LP*	Natural-to-Propane Conversion Kit	X	X	X	X	X	X
NAHD00901NG*	Propane-to-Natural Conversion Kit	X	X	X	X	X	X

ACCESSORIES (CONT.)							
PART NUMBER	DESCRIPTION	090C048	090C060	090D066	110C060	110D066	135D060
NAHB00701FF	External Bottom Filter Rack, 21 inch (20 x 25 inch washable filter included)	X	X		X		
NAHB00801FF	External Bottom Filter Rack, 24 inch (24 x 25 inch washable filter included)			X		X	X
NAHA00706FB	Washable filter, 1 inch – 24 x 25 (6 pack)	X	X	X	X	X	X
NAHA01101SB	Combustible Floor Base (Not required when evaporator coil case is used for downflow)	X	X	X	X	X	X
NAHB00301VC	Downflow Vent Guard (Not required when vent is routed through cabinet)	X	X	X	X	X	X
NAHA00401DH	Chimney Adapter Kit 4-in. vent	X	X		X		
NAHA00301DH	Chimney Adapter Kit 5-in. vent			X		X	X
NAHD00901LP*	Natural-to-Propane Conversion Kit	X	X	X	X	X	X
NAHD00901NG*	Propane-to-Natural Conversion Kit	X	X	X	X	X	X

- X Accessory available
† Suitable for 17 inch external bottom filter rack.
* Factory authorized and field installed. Gas conversion kits are CSA recognized.

